


# Frank Pattern™

## FLUSH FLOOR CLEANOUT

### N404W/4440

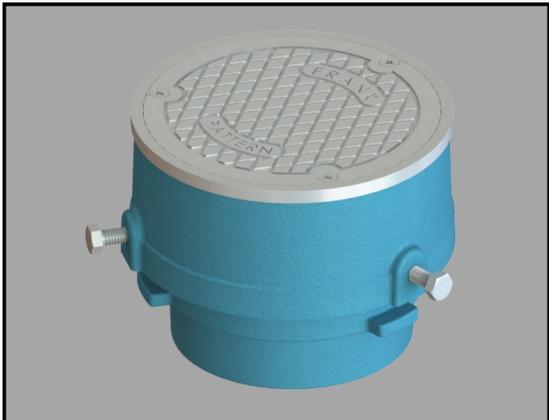

**INSTALLATION**

1. Secure to drain pipe at desired height using 3 set screws.
2. Install to pipe cleanout prior to concrete pour.
3. Pour concrete flooring to top of brass ring.

**SPECIFICATION**

For Use with underground drain pipe access.  
Recommended for concrete floors.

**DESIGN FEATURES**

- Coated cast iron main body with brass cover plate and ring
- Stainless steel fasteners


**COMPLIANCES/LISTINGS**

- Compliant to ASME A112.36.2M standards listed in IAPMO File: 4191
- Compliant to Uniform Plumbing Code (UPC®)
- Compliant to International Plumbing Code (IPC®)




**DIMENSIONS**

Top View

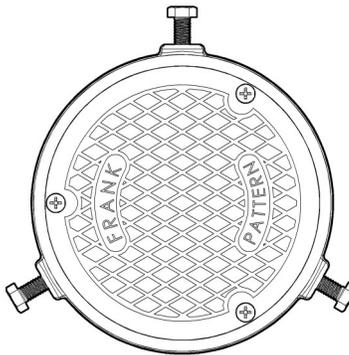

Side View

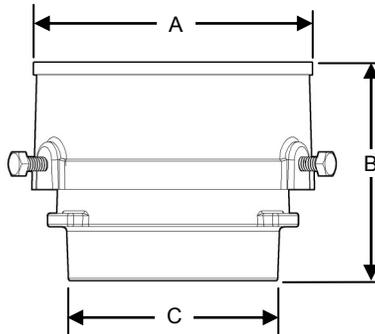

Part Number	Description	Drain Connection	Drain Pipe Size	Dimensions (Inches)			
				A	B (Min)	B (Max)	C
N404W/4440	Cleanout w/ Floor Access Cover Assembly	Set Screws	2-3"	5-1/16	4-1/8	5-1/4	4-1/4



3689 Arrowhead Drive, Carson City, NV 89706  
 Phone (800) 854-3215 Fax (800) 243-1777  
 E-mail sales@lspproducts.com  
 Website www.lspproducts.com  
 Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.

Revised 05/2017

Product Submittal	
Job Name:	
Date:	
Part Number	Quantity
Architect:	
Contractor:	