IG230ELSX-T9

- Two Circline Lamps
- Pre-Wired With Plug
- Small Case Size
- Lightweight



Features & Benefits

Suitable for one FC8T9 CIRCLINE 22 WATT and one FC12T9 CIRCLINE 32 WATT or one FC12T9 32 WATT and one FC16T9 40 WATT lamps.

Class A Sound Rating

More efficient compared to standard magnetic ballasts

Lead wires do not interfere with mounting holes

Eliminates strobing

Thermal potting


Metal enclosure

Rapid Start


SPECIFICATIONS

- Operating Voltage: 120 VAC ± 10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CSA Listed
- Over Current: Fuse
- Min. Starting Temp: 0˚F (-17.78˚C)
- Max. Case Temp: 158˚F (75˚C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

DIMENSIONS

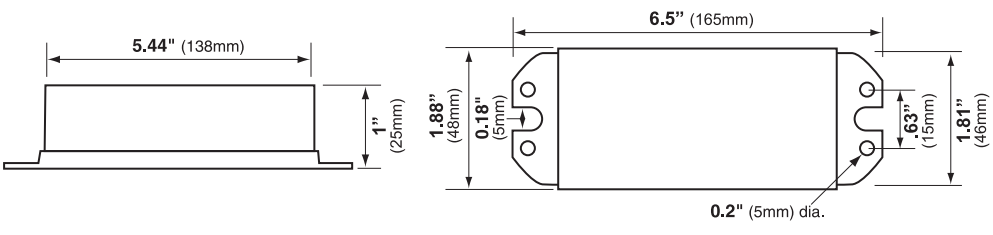

WIRING DIAGRAM

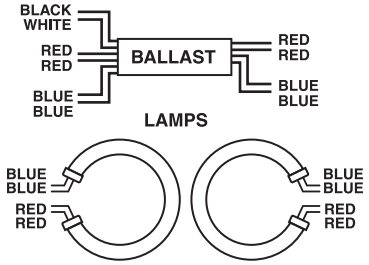

Weight: 11.3 oz. *Standard Lead Length:* black/white-12" red/blue-9"