

MOEN®

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Single function handshower with double check valves

OPERATION

- Lever style handles
- Rotate hot side handle counterclockwise to open (clockwise to close)
- Rotate cold side handle clockwise to open (counterclockwise to close)

FLOW

- Hand shower meets 2.0 gpm max (7.6 L//min) @ 80 psi


STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- **ADA**  for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations

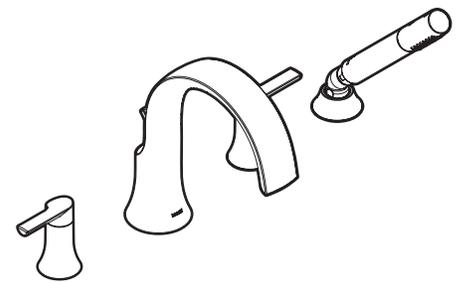

DOUX™ Two-Handle Roman Tub Faucet Trim w/Built In Diverter Valve

Models: TS984 series

Valves: 9792, 9793

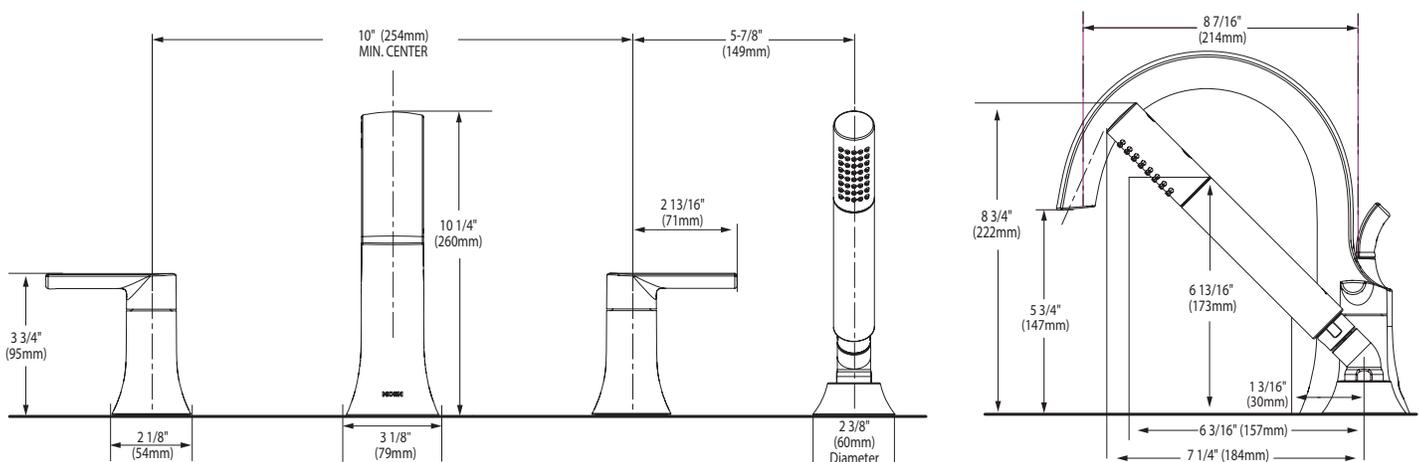

CRITICAL DIMENSIONS

(DO NOT SCALE)