

Turning Vane

Double Wall Vane

Job: _____


Location: _____

Submitted To: _____

Submittal Prepared By: _____

Approved By: _____

Date: _____

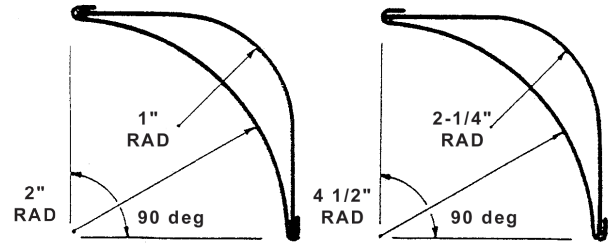

MANUFACTURED BY



1502 Industrial Drive
Monongahela, PA 15063
800-245-3188
www.ductmate.com

LOCAL SUPPLIER

INDUSTRY REGULATIONS



Conforms to SMACNA dimensional and gauging requirements.

PRODUCT GUARANTEE

Ductmate Double Wall Turning Vane is guaranteed against defective material.

PACKAGING INFORMATION

Part Number	Size	Gauge	Feet/Bundle
2VGA26	2"	26	100'
4VGA24	4"	24	100'

DESCRIPTION

2" and 4" Double Wall Turning Vane

BASIC USE

Provide easy means for construction of consistent, double wall turning vanes systems, for the purpose of directing air around mitered elbow.

FEATURES

- Dimpled seam for superior strength
- Consistent product quality
- Union made in the U.S.A.
- Available in a variety of specialty metals
- Available for 2" and 4" turning vanes

TECHNICAL INFORMATION

Steel

Standard construction consists of G-60 galvanized. Available in Galvannealed, Stainless, Aluminized, Aluminum, Black Iron and PVC Coated.

Requirements

Ductmate Double Wall Vane is required when specifying the Ductmate PROrail system.