

JONES STEPHENS' PLUMBITE® PUSH TO CONNECT WATER HEATER CONNECTORS

Product Description

A heat-free method of joining Copper, CPVC, PE-RT or PEX tubing, designed to save time on installation and to connect piping with relative ease and confidence. No soldering, glue, heat or external tools required to join the pipe. Just insert the pipe and the stainless steel gripper ring, bite down and hold the pipe tightly which the EPDM o-ring seals against leakage. Disassembly is just as fast using the optional disassembly tool so fittings can be easily removed and re-used.

Product Features

- Push to Connect Joining Technology (no Soldering, Glue, Heat or External Tools Required)
- Suitable for Copper, PEX, PE-RT or CPVC Piping systems
- Reduced installation time and cost
- Can be disassembled and re-used
- Secure Connections and Seal with Stainless Steel Gripper Ring and EPDM O-Ring
- Ideal for Piping Systems Service and Repair
- Ultra Low Lead and Robust Brass Design, Certified for Potable Water Applications
- Manufacturing process includes a final cleaning process to provide a bright and uniform surface finish

Product Specifications


- NSF/ANSI 61 - Certification that this product does not leach harmful health contaminants into drinking water
- NSF 372 - Certification to ensure the product lead content meets public safety standards
- ASSE 1061 - Certified to meet the IAPMO Performance Standards for Push Fittings
- UPC and cUPC - Meet Uniform Plumbing Code Requirements
- IAPMO Certified
- ASME A112.18.6

Performance Specifications

- Maximum Temperature - 180 degrees F
- Maximum Pressure - 200 PSI
- Service: Potable Water


Materials

- Body- DZR Brass
- O-Ring - EPDM, Peroxide Cured
- Gripper Ring - Stainless Steel
- Disassembly Tool (optional) - POM for sizes 1" and below, Stainless Steel for sizes 1-1/4" and higher

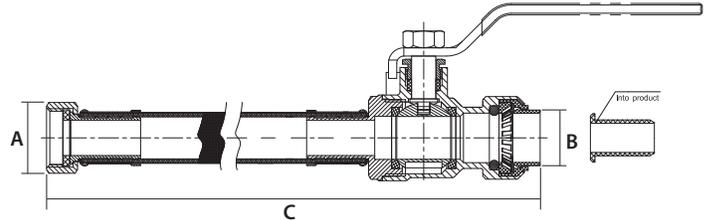

WATER HEATER CONNECTORS WITH BALL VALVE

Part Number Individually Packaged	"A" Nominal (in.)	"B" Nominal (in.)	"C" (in.)	"C" Tolerance +/- (in.)
C77477LF	0.75 FIP	0.75	18.55	0.40
C76616LF	0.75 FIP	0.50	18.55	0.40
C76617LF	0.75 FIP	0.75"	18.55	0.40

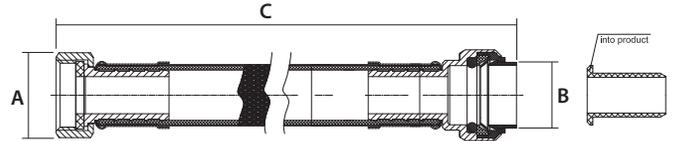

WATER HEATER CONNECTORS

Part Number Individually Packaged	"A" Nominal (in.)	"B" Nominal (in.)	"C" (in.)	"C" Tolerance +/- (in.)
C76605LF	0.75 FIP	0.50	12.52	0.39
C76606LF	0.75 FIP	0.50	15.52	0.40
C76607LF	0.75 FIP	0.50	18.55	0.40
C76608LF	0.75 FIP	0.50	24.53	0.40
C76612LF	0.75 FIP	0.75	12.52	0.39
C76613LF	0.75 FIP	0.75	15.52	0.40
C76614LF	0.75 FIP	0.75	18.55	0.40
C76615LF	0.75 FIP	0.75	24.53	0.40
C77478LF	0.75 FIP	0.75	18.55	0.40
C77479LF	0.75 FIP	0.75	24.53	0.40