

SPECIFICATIONS

		MODEL 5660	MODEL 5691
		Compatible with E070, E080 and E100	Compatible with E130
A	Width	18"	27"
B	Inside Rail Width	5 3/4"	10 1/2"
C	Outside Rail Width	8 3/4"	13 1/2"
D	Length	29 7/8"	38"
E	Height	3"	3"
F	Weight	13 lbs.	18 lbs.
Weight (Working Load)		400 lbs.	400 lbs.
Shipping Weight (w/ Carton)		14.6 lbs.	19.7 lbs.

FEATURES

- 14 gauge zinc-plated steel
- 1/4" thick black neoprene pads for vibration insulation
- 10' cables with Gripple® clamps and 3-1/2" bolts
- Total safe working load 400 lbs.
- Parts bag includes (8) 3/8" flat washers, (8) 3/8" hex nuts, and Gripple key
- Model 5660 kit also compatible with Models e070, e080, and e100
- Model 5691 kit also compatible with Model e130

INSTALLING AN APRILAIRE DEHUMIDIFIER WITH MODEL 5660 AND 5691 HANGING KITS

- 1 Open box and remove the contents. Contents include:

- Hanging bracket with cables and bolts
- 8 nuts, 8 washers
- Gripple® key
- Installation instructions



- 2 Unfold the hanging bracket so the support bars are perpendicular to the hanging bars.



- 3 Use two washers and two nuts on each cable bolt when mounting the hanging bracket to a structure. Make sure the structure can support the weight of the hanging bracket and dehumidifier.




- 4 Extend the dehumidifier feet approximately 3/4" to 1".



- 5 With the feet extended, center the dehumidifier on the hanging bracket, with the feet outside of the support bars.



- 6 Adjust the height of the hanging bracket by either pulling on the cable or inserting the Gripple key to release tension.

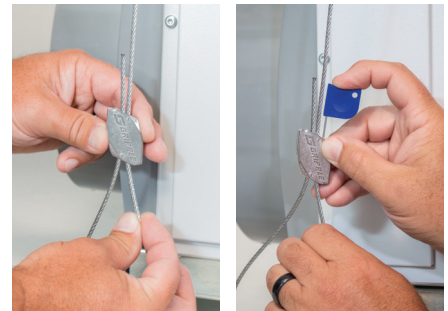

CAUTION:

Bracket and dehumidifier must be supported when key is used to release the cable.

- 7 Set a level on top of the dehumidifier to make sure it is level in both directions.

