


MOLDED

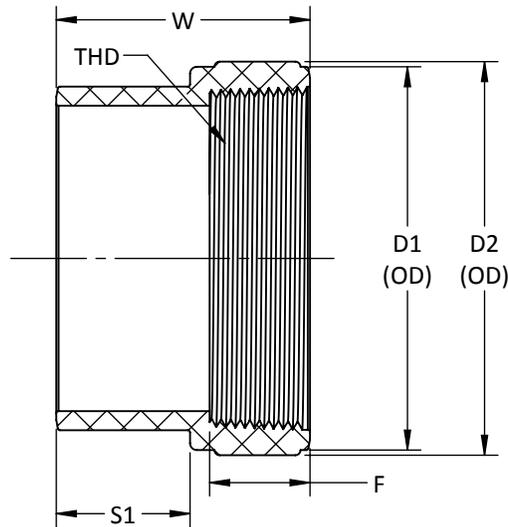

ASTM D2665, F1866, CSA B181.2 WHERE APPLICABLE

**FITTING CLEANOUT (SxFIPT)
PVC SOLVENT WELD DWV**

| PART NO. | SIZE IN INCHES | S1 | F | W | D1 | D2 | THD |
|----------|----------------|---------|---------|---------|----------|----------|-------------|
| * D1504 | 4 | 1 25/32 | 1 5/16 | 3 11/32 | 5 1/32 | 5 1/16 | 4" - 8 FPT |
| * D1506 | 6 | 3 1/16 | 1 9/16 | 4 29/32 | 7 7/32 | 7 3/8 | 6" - 8 FPT |
| * D1508 | 8 | 4 1/16 | 1 3/4 | 6 5/32 | 9 11/32 | 9 1/2 | 8" - 8 FPT |
| * D15010 | 10 | 5 1/16 | 1 25/32 | 7 7/32 | 11 17/32 | 11 17/32 | 10" - 8 FPT |
| * D15012 | 12 | 6 1/16 | 1 29/32 | 8 3/8 | 13 19/32 | 13 19/32 | 12" - 8 FPT |

-- DIMENSIONS AND APPEARANCE ARE APPROXIMATE AND SUBJECT TO CHANGE
WITHOUT NOTICE DUE TO DESIGN OR PRODUCTION MODIFICATIONS
-- MOLDED FITTING TOLERANCE = ±1/8" OVERALL LENGTH
-- FABRICATED FITTING TOLERANCE = ±1" LINEAR, ± 2° ANGULAR

* MOLDED FITTING
† ASSEMBLED FROM MOLDED COMPONENTS
ALL OTHER FITTINGS ARE FABRICATED