

# UNIVERSAL PIPE HANGER

» 553-0 SERIES

ZipStick™

## SPECIFICATION

Sioux Chief ZipStick™ Universal Pipe Hanger shall be used where necessary to support DWV piping according to all national code requirements. Hanger shall feature I-beam stem design for strength and rigidity and a high heat strap with a releasable locking mechanism. Hanger shall be noncorrosive and UV-resistant. Hanger shall be impact resistant to 0°F, and be able to withstand temperatures up to 140°F. Hanger shall include two pre-loaded zinc plated, rust resistant nails. Nails shall have a continuous rink shank to provide a more permanent installation. Hanger stem may be snapped off or cut to create a shorter stem in tight spaces. Hanger stem may be extended buy using optional stainless steel L-bracket (purchase separately) and all-thread rod with approved hardware. L-bracket shall be secured to hanger stem using two #8 screws (provided).

Hanger may be used to support wrapped or insulated pipe, bundles of flexible tube, or wire or supporting vent pipe in attics. Universal strap can support 1" CTS to 6" IPS. Additional straps may be used to extend the strap length to hang flexible ducting or similar objects of larger diameter, which do not exceed the load ratings listed on this specification. Hanger shall be IAPMO certified.

## INSTALLATION

Nail stem of hanger to joist or stud location using ring shank nails (provided). Position strap around pipe then insert strap into square locking mechanism then pull down on strap until strap cinches tightly around pipe. Excess strap may be cut if desired.

## MATERIALS

**Stem:** ABS, U.V. resistant, corrosion-proof, impact-resistant

**Strap:** High-heat polypropylene

**Nail:** 1<sup>5</sup>/<sub>8</sub>" rust-resistant, zinc-plated, continuous rink shank

**L-bracket:** 14-gauge, stainless steel

**Screw:** #8 × 1" zinc-plated hex

## SAFE WORKING LOADS

50 lbs @ 32°F

50 lbs @ 72°F

25 lbs @ 140°F (140°F is maximum safe working temperature)

## SAFE WORKING TEMPERATURE

Impact resistant to 0°F

Maximum temperature: 140°F

## DIMENSIONS

	-014	-026
A: ZipStick length	14.0"	26.0"
B: ZipStick width	0.875"	0.875"
C: ZipStrap width	0.75"	0.75"
D: Nailway spacing	1.0"	1.0"
E: Strap length	23.5"	23.5"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____




553-014



553-STRP



521-210

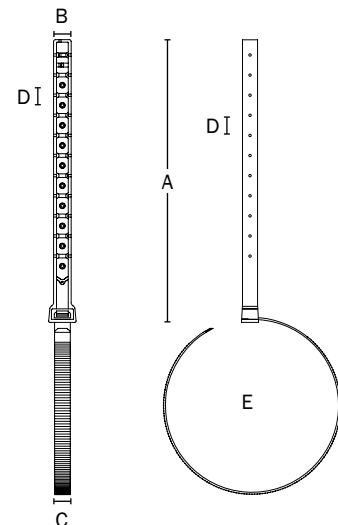

Made in USA

Create Item Number

**553-A**

e.g. 553-014: 14" ZipStick™

### LENGTH A

014 = 14" long

026 = 26" long

Available separately:  
521-210: L-bracket  
553-STRP: ZipStrap strap only