BEASLEY

FREESTANDING TUB FAUCET WITH HAND SHOWER

SKU: 948654



CONTENTS

TUB FAUCET PAGE 2 VALVE PAGE 3

FEATURES

Installation Type: Freestanding

Handle Type: Lever

Features: Hand shower included Tub Faucet Material: Brass Hot and Cold Indicators: No

Drain Included: No

Tub Spout Flow Rate: 10.7 gpm (40.5 L/min)

@ 80 psi

Hand Shower Flow Rate: 1.8 gpm (6.8 L/min)

@ 80 psi

Three Function Hand Shower (Full Spray, Massage, Spray & Massage)

Integral Diverter to Hand Shower


Hand Shower Includes Factory Installed
Backflow Prevention Check Valve

Optional Rough-In Valve Includes Stops

Underfloor Access is Required for Proper

Installation


Installation on an Existing Concrete Slab will Require Cutting and Concrete Removal



BEASLEY

FREESTANDING TUB FAUCET WITH HAND SHOWER

SKU: 948654

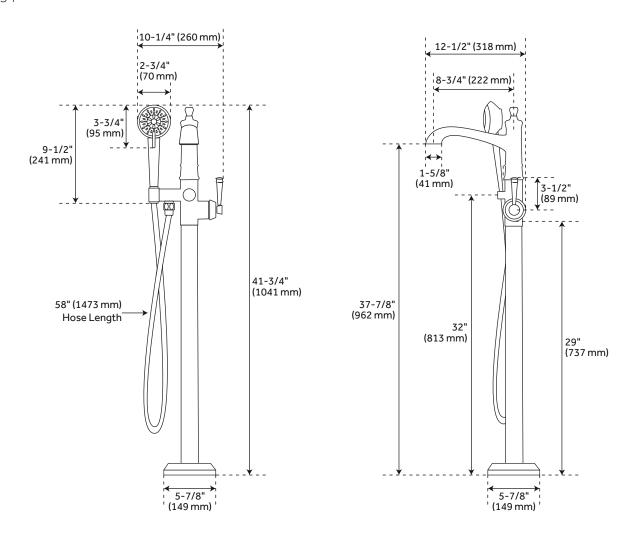

FEATURES

Length: 10-1/4"
Width: 12-1/2"
Height: 41-3/4"
Height To Spout: 37-7/8"
Height to Control Valve: 32"
Spout Reach: 8-3/4"
Spout Width: 1-5/8"
Base Plate Diameter: 5-7/8"

Hand Shower Hose Length: 58"

CODES/STANDARDS

cUPC
ASME A112.18.1/CSA B125.1
ASME A112.18.3
WaterSense
CEC Listed
Massachusetts Accepted

PRODUCT IMAGE







 $All \ dimensions \ and \ specifications \ are \ nominal \ and \ may \ vary. \ Use \ actual \ products \ for \ accuracy \ in \ critical \ situations.$


PAGE 2 Code: SHBEFS2000G



BEASLEY

OPTIONAL FREESTANDING TUB FAUCET ROUGH-IN VALVE

SKU: 948654

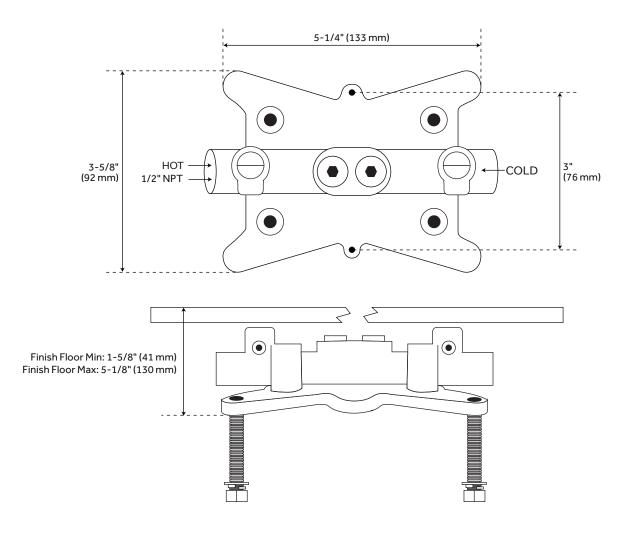

FEATURES

Material: Brass Length: 5-1/4" Width: 3-5/8" Height: 5-1/8" NPT Connection: 1/2"

CODES/STANDARDS

cUPC ASME A112.18.1/CSA B125.1 Massachusetts Accepted

PRODUCT IMAGE





 $All \ dimensions \ and \ specifications \ are \ nominal \ and \ may \ vary. \ Use \ actual \ products \ for \ accuracy \ in \ critical \ situations.$

PAGE 3 CODE: SHFSR2000WS