



TrimFit® TD Test & Drain Valves

FPPI TrimFit® TD Test & Drain Valves feature heavy duty brass* construction for extended service life. TrimFit® TD features three positions: closed, test, and drain (open). Two large and integral sight glasses allow for maximum visibility when operated. Due to the compact and integrated form, TrimFit® TD valves can be installed in both horizontal and vertical orientations in a small amount of space. Available with threaded or grooved connections.

Features

- Positive positioning of handle for OFF, TEST, or DRAIN
- 2 threaded or grooved connections
- Large, integral sight glass on both sides
- ½" (nominal) test orifice
- UL/ULc Listed
- FM Approved

Specifications

- Rated Working Pressure: 175 PSI

Materials

- Body: ASTM B584 C85700
- Seat: Teflon
- Ball: ASTM C37700
- Adapter: ASTM B584 C85700
- Stem: ASTM B16 C36000
- Screw Plug: ASTM B16 C36000
- O-Ring: NBR
- Indicator Plate: Steel, Zinc plated
- Nut: Steel, Zinc plated
- Ball: Stainless Steel 304
- Spring: Stainless Steel 304
- Cap: ASTM B16 C36000
- Screw: Brass*
- Inspect Plug: PC
- Handle Sleeve: Vinyl


*Contains lead. Not for use in water systems intended for human consumption.



WARNING: Cancer and Reproductive Harm -
www.P65Warnings.ca.gov



06-850-10

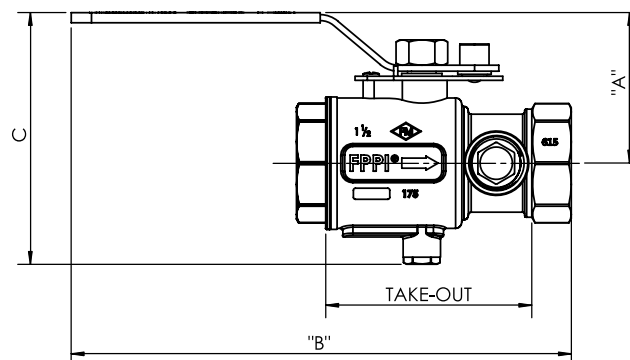

Part No.	Description	Size	Take Out		A		B		C		Wt	
		in	in	mm	in	mm	in	mm	in	mm	lbs	kg
06-850-10	NPT	1	3.496	88.8	3.020	76.7	8.307	211	4.654	118.2	2.064	0.9
06-852-10	NPT	1¼	3.496	88.8	3.118	79.2	8.527	216.6	4.929	125.2	2.615	1.2
06-854-10	NPT	1½	4.012	101.9	2.933	74.5	9.723	247	4.902	124.5	3.717	1.7
06-854-50	GROOVE	1½	4.020	102.1	2.933	74.5	9.900	251.5	4.902	124.5	3.735	1.7
06-856-10	NPT	2	4.393	111.6	3.090	78.5	10.026	254.7	5.354	136	5.445	2.5
06-856-50	GROOVE	2	4.449	113	3.138	79.7	10.030	254.8	5.402	137.2	5.269	2.4