




Lead Free Brass Expansion Pex Ball Valves

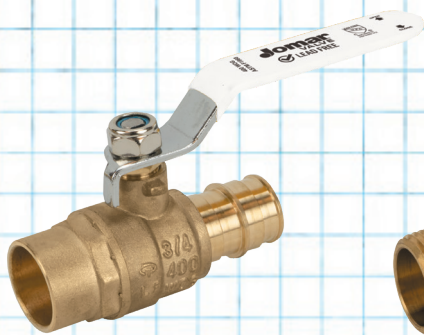


Solder x PEX
1/2" - 3/4"

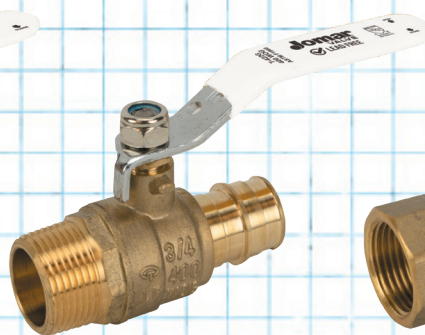


MIP x PEX
3/4"

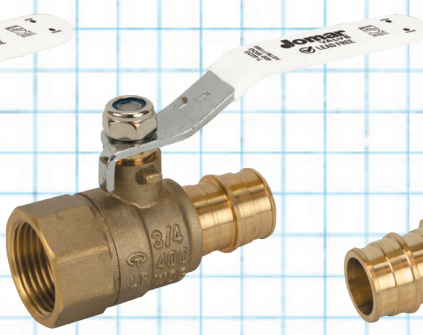

FIP x PEX
3/4" - 1"

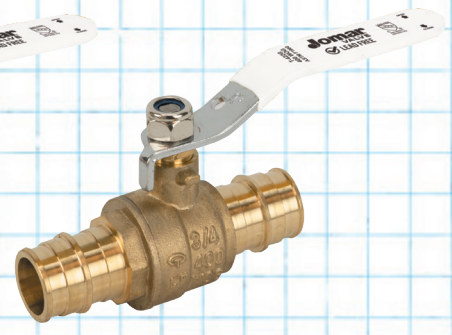

PEX x PEX
1/2" - 3"

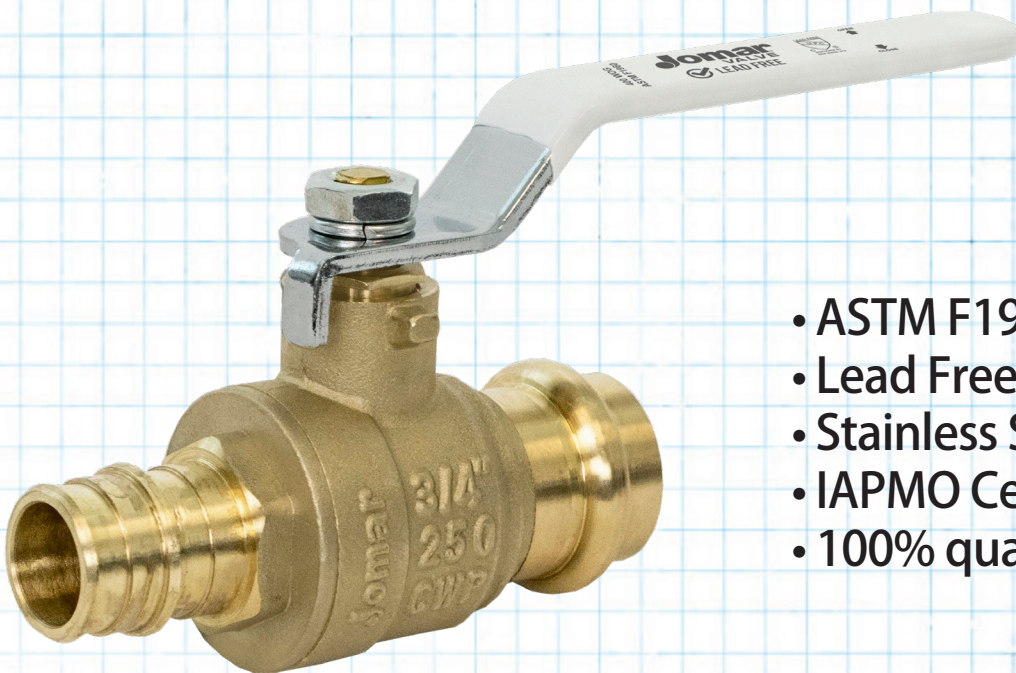

Press x PEX 1/2" - 1"

- ASTM F1960 Cold Expansion PEX
- Lead Free Brass
- Stainless Steel Trim
- IAPMO Certified 
- 100% quality tested in the USA

Jomar
VALVE

www.jomarvalve.com

Lead Free Brass Ball Valve



2 Piece • Standard Port • Expansion Pex Connections • 400 WOG • Stainless Steel Ball and Stem

Features

- Gland follower and single o-ring stem design
- Blow-out proof stem
- 100% leak tested
- Wetted surfaces contain less than .25% lead content


Approvals

- ASTM F1960
- IAPMO Certified*
 - NSF 61-8
 - NSF 372
 - Uniform Plumbing Code (cUPC)
 - IAPMO/ANSI Z1157-2014
 - NSF/ANSI 14-2014


*Not applicable to Press x PEX valves

Pressure Rating


- Body rated to 400 WOG, 250 WOG Press x PEX
- Expansion connection rated to 150 WOG up to 200°F

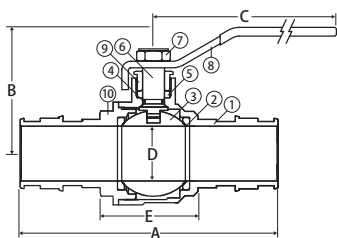


Pex x Pex

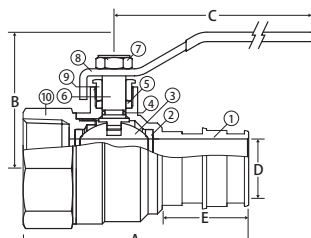


Female x Pex

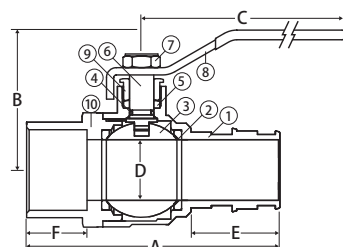

Solder x Pex

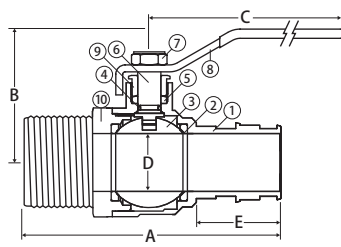

Male x Pex

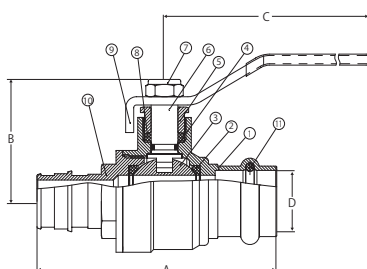

Press x Pex

Please see individual specs for detailed product information

Material Specifications

No.	Part	Materials
1	Body	Lead Free Brass - C46400
2	Seat	PTFE
3	Ball	304 Stainless Steel
4	O-ring	Buna-N
5	Packing	PTFE
6	Stem	304 Stainless Steel
7	Handle Nut	Steel - Chrome Plated
8	Handle	Steel - Chrome Plated
9	Packing Nut	Brass - C37700
10	End Connection	Lead Free Brass - C46400

Part No.	Size	Shipping			Dimensions				
		Case Qty	Carton Qty	Case Weight	A	B	C	D	E
PEX x PEX									
104-523PG	1/2"	120	10	40	2.58	1.69	3.35	0.39	1.16
104-524PG	3/4"	100	10	50	3.31	1.81	3.35	0.61	1.35
104-525PG	1"	54	6	47	3.98	2.09	4.29	0.81	1.63
104-526PG	1-1/4"	36	6	47	4.65	2.25	4.29	0.98	1.77
104-527PG	1-1/2"	24	4	46	5.52	2.45	5.63	1.10	2.12
104-528PG	2"	12	2	40	6.91	2.74	5.63	1.58	2.66
104-529PG	2-1/2"	6	1	34	8.80	3.04	5.63	2.01	3.17
104-530PG	3"	6	1	58	10.75	4.25	7.76	2.44	4.00

Part No.	Size	Shipping			Dimensions				
		Case Qty	Carton Qty	Case Weight	A	B	C	D	E
FIP x PEX									
104-554PG	3/4"	120	10	49	2.68	1.81	3.35	0.61	0.94
104-555PG	1"	54	6	47	3.33	2.09	4.29	0.81	1.18

Part No.	Size	Shipping			Dimensions					
		Case Qty	Carton Qty	Case Weight	A	B	C	D	E	F
Solder x PEX										
104-533PG	1/2"	120	10	33	2.40	1.19	3.35	0.39	0.71	0.50
104-534PG	3/4"	100	10	47	2.84	1.81	3.35	0.61	0.94	0.75
104-535PG	1"	40	8	33						

Part No.	Size	Shipping			Dimensions				
		Case Qty	Carton Qty	Case Weight	A	B	C	D	E
MIP x PEX									
104-534MPG	3/4"	100	10	47	3.17	1.81	3.35	0.61	0.94

Part No.	Size	Shipping			Dimensions				
		Case Qty	Carton Qty	Case Weight	A	B	C	D	E
Press x PEX									
104-563PG	1/2"	100	10	48	2.95	1.81	3.46	0.59	-
104-564PG	3/4"	60	10	50	3.52	2.09	4.29	0.75	-
104-565PG	1"	40	8	47	4.07	2.25	4.29	0.98	-