


# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES

### PRODUCT

	30" DUAL-FUEL RANGE JDRP430H	36" DUAL-FUEL RANGE JDRP436H
Overall Width (A)	29-7/8" (75.9 cm)	35-7/8" (91.1 cm)
Bullnose Height (B)	2-1/8" (5.4 cm)	2-1/8" (5.4 cm)
Control Panel Height (C)	7-1/2" (19.1 cm)	7-1/2" (19.1 cm)
Door Height (D)	20-11/16" (52.6 cm)	20-11/16" (52.6 cm)
Door Bottom to Handle Top: RISE™ (E)	20" (50.8 cm)	20" (50.8 cm)
Door Bottom to Handle Top: NOIR™ (E)	20-5/8" (52.4 cm)	20-5/8" (52.4 cm)
Toe-Kick Height (F)	6-11/16" (17 cm)	6-11/16" (17 cm)

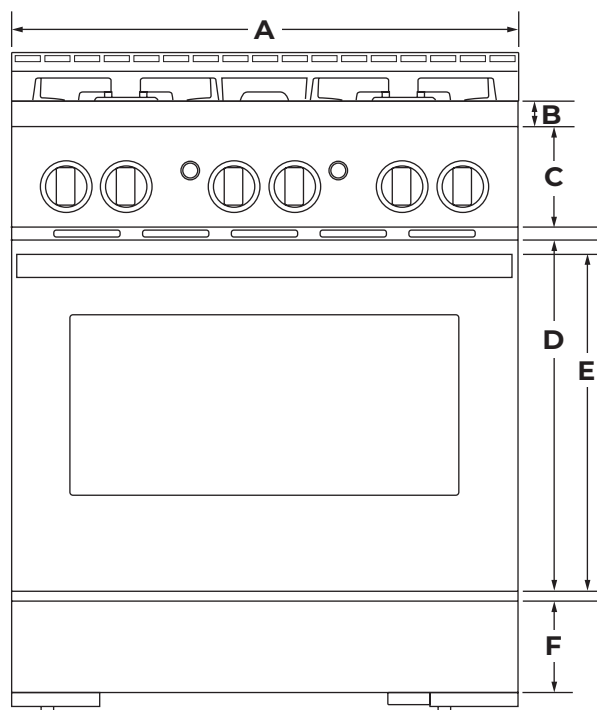

FRONT VIEW




**IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES

### PRODUCT

	30" DUAL-FUEL RANGE JDRP430H	36" DUAL-FUEL RANGE JDRP436H
Depth with Control Panel Overhang (G)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth with Handle: RISE™ (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with Handle: NOIR™ (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Door Fully Open (I)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)

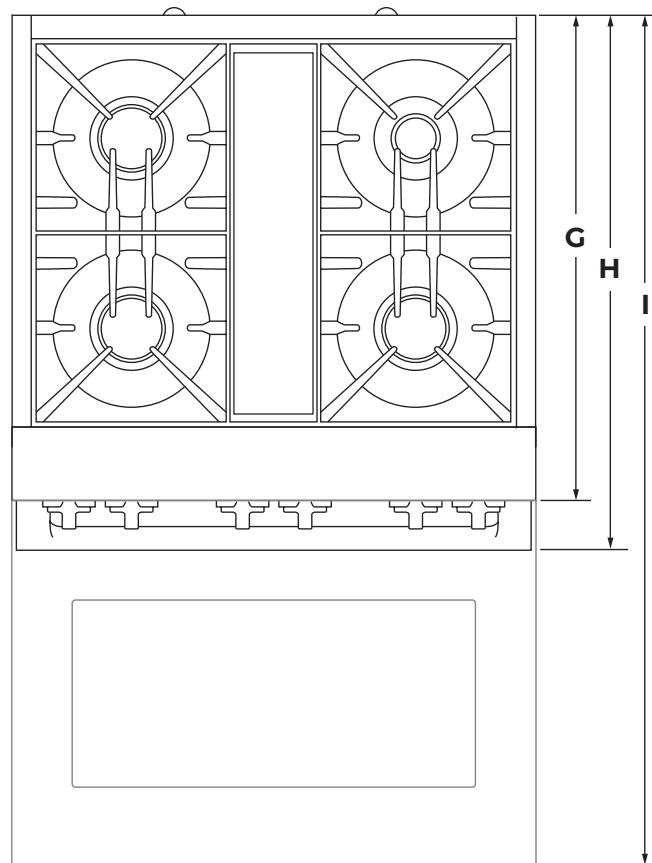


TOP VIEW

# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES

### PRODUCT

	30" DUAL-FUEL RANGE JDRP430H	36" DUAL-FUEL RANGE JDRP436H	48" DUAL-FUEL RANGE JDRP548H
Grates Top Height (A)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)	37-5/16" (94.8 cm)
Cooking Surface Top Height (B)	36" (91.4 cm)	36" (91.4 cm)	36" (91.4 cm)
Door Top Height (C)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)	27-13/16" (70.6 cm)
Handle Top Height: RISE™ (D)	27" (68.6 cm)	27" (68.6 cm)	27" (68.6 cm)
Handle Top Height: NOIR™ (D)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)	27-5/8" (70.2 cm)
Toe-Kick Height (E)	6-11/16" (17 cm)	6-11/16" (17 cm)	6-11/16" (17 cm)
	<b>OPTIONAL ACCESSORIES</b>		
Height to Top of 9" Stainless Steel Backsplash (F)	45" (114.3) min.	45" (114.3) min.	45" (114.3) min.

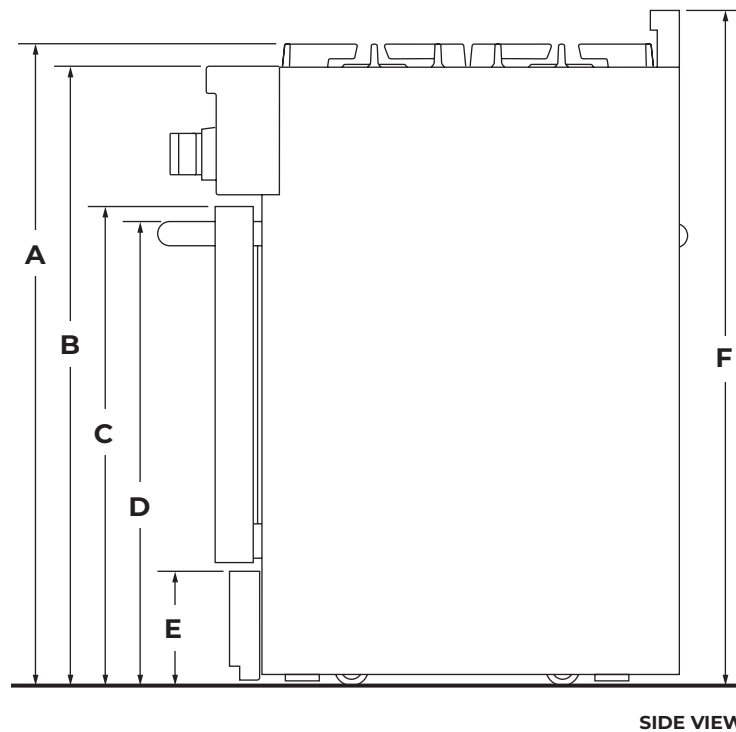

SIDE VIEW




**IMPORTANT:** Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1-3/4" (4.4 cm) of added height.

# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES

### PRODUCT

	30" DUAL-FUEL RANGE JDRP430H	36" DUAL-FUEL RANGE JDRP436H	48" DUAL-FUEL RANGE JDRP548H
Depth with Door Fully Open (G)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)	46-1/2" (118.1 cm)
Depth with RISE™ Handle (H)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)	29-13/16" (75.7 cm)
Depth with NOIR™ Handle (H)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)	29-5/16" (74.5 cm)
Depth with Control Panel Overhang (I)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)	27-11/16" (70.3 cm)
Depth to Toe-Kick with Door (J)	26-3/8" (67 cm)	26-3/8" (67 cm)	26-3/8" (67 cm)
Depth with RISE™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)
Depth with NOIR™ Door (K)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)	27-1/4" (69.2 cm)

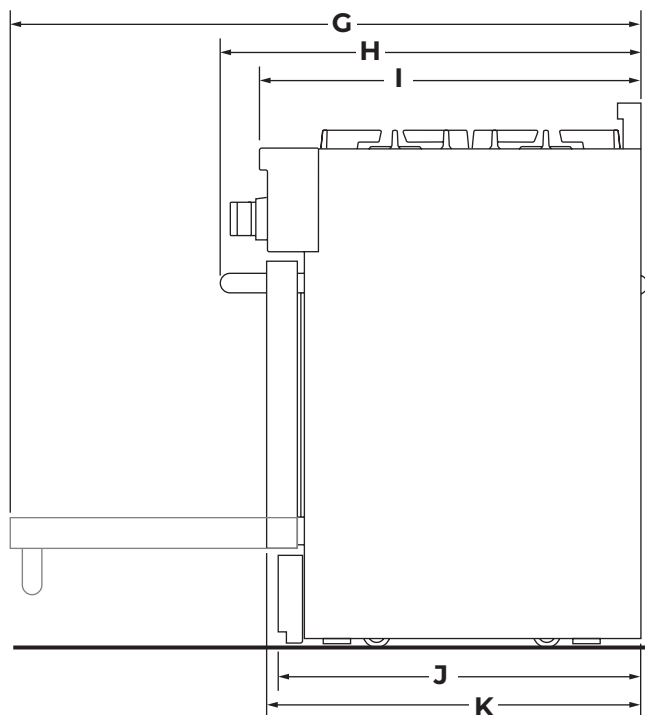


SIDE VIEW

# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES

PRODUCT

	48" DUAL-FUEL RANGE JDRP548H
Overall Width (A)	47-7/8" (121.6 cm)
Bullnose Height (B)	2-1/8" (5.4 cm)
Control Panel Height (C)	7-1/2" (19.1 cm)
Door Heights (D)	20-11/16" (52.5 cm)
Door Bottoms to Handle Tops: RISE™ (E)	20" (50.8 cm)
Door Bottoms to Handle Tops: NOIR™ (E)	20-5/8" (52.4 cm)
Secondary Oven Door Width (F)	17-3/4" (45.1 cm)
Main Oven Door Width (G)	29-5/8" (75.2 cm)
Toe-Kick Height (H)	6-11/16" (17 cm)

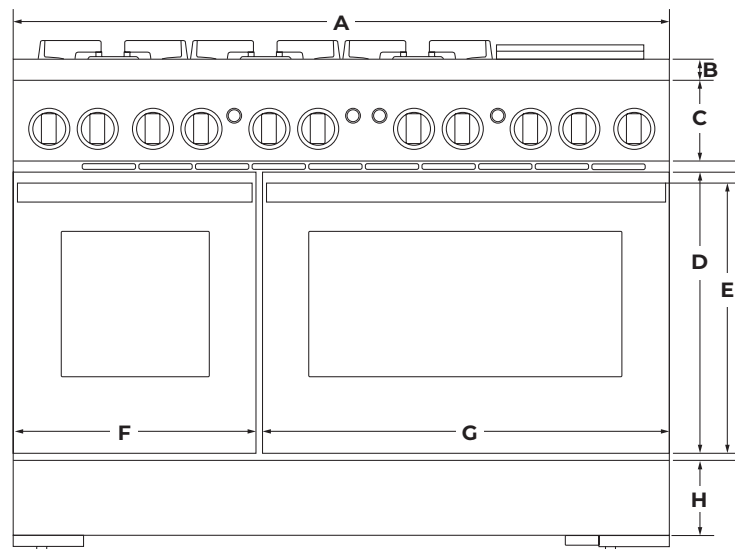


FRONT VIEW

# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES

### PRODUCT

	<b>48" DUAL-FUEL RANGE</b> JDRP548H
Depth with Control Panel Overhang (I)	27-11/16" (70.3 cm)
Depth with Handles: RISE™ (J)	29-13/16" (75.7 cm)
Depth with Handles: NOIR™ (J)	29-5/16" (74.5 cm)
Depth with Doors Fully Open (K)	46-1/2" (118.1 cm)

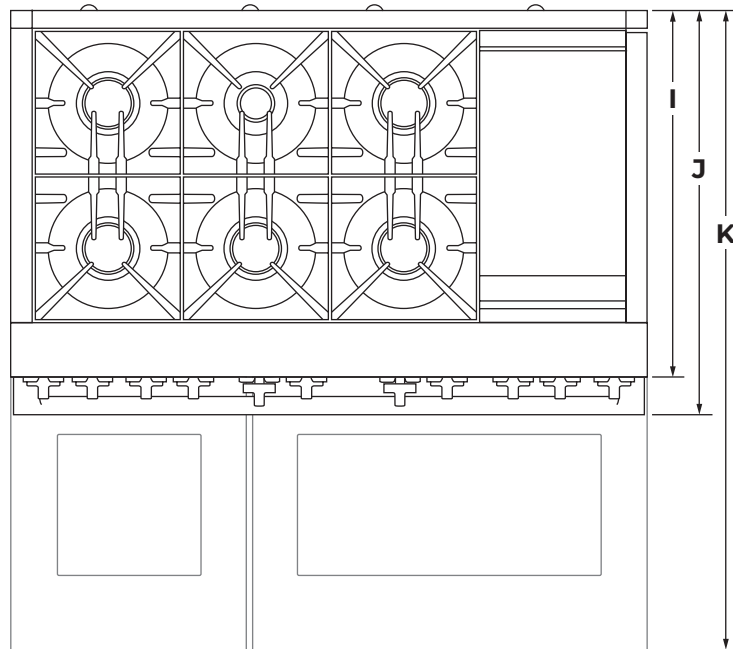

TOP VIEW


# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES

### OPENING AND CLEARANCE

	<b>30" DUAL-FUEL RANGE</b> JDRP430H	<b>36" DUAL-FUEL RANGE</b> JDRP436H	<b>48" DUAL-FUEL RANGE</b> JDRP548H
<b>Combustible Area Above Cooking Surface Width (A)</b>	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
<b>Bottom of Cabinet Height Above Cooking Surface (B)*</b>	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
<b>Bottom of Cabinet Height Above Countertop (C)</b>	18" (38.1 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
<b>Distance to Fixed Wall or Combustible Material (D)</b>	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.
<b>Opening Width (E)</b>	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.

\*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

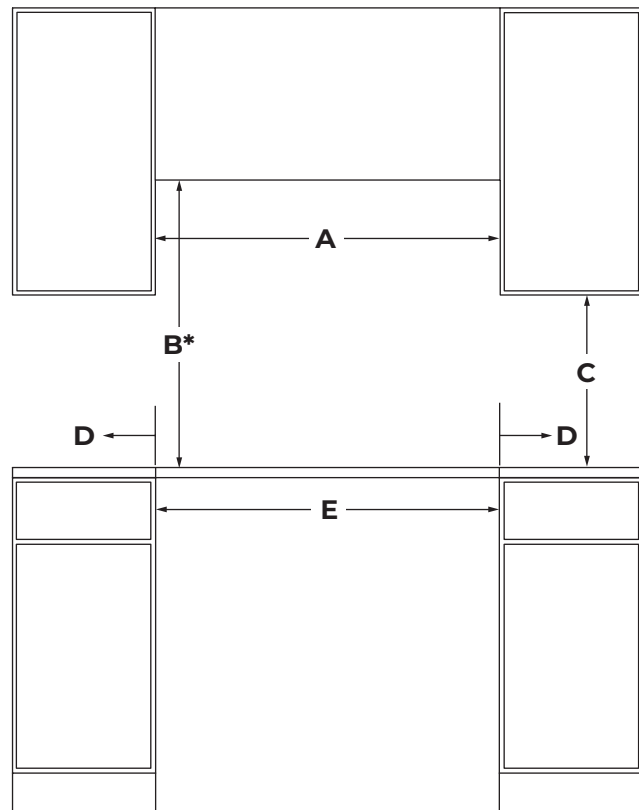

FRONT VIEW


# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES

### OPENING AND CLEARANCE

	30" DUAL-FUEL RANGE JDRP430H	36" DUAL-FUEL RANGE JDRP436H	48" DUAL-FUEL RANGE JDRP548H
Upper Cabinet Depth (F)	13" (33 cm) max.	13" (33 cm) max.	13" (33 cm) max.
Depth to Wall (G)*	6" (15.2 cm) min.	6" (15.2 cm) min.	6" (15.2 cm) min.

\*If the back wall is constructed of a combustible material and a backsplash is not installed, a 6" (15.2 cm) minimum clearance is required.

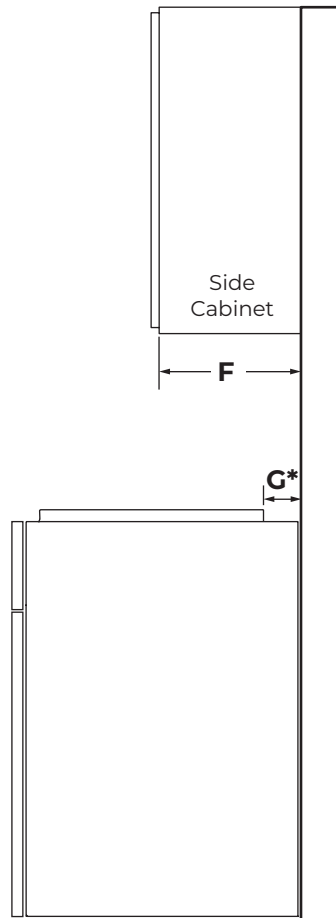

SIDE VIEW



# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES


### ELECTRICAL REQUIREMENTS

	30" DUAL-FUEL RANGE JDRP430H	36" DUAL-FUEL RANGE JDRP436H	48" DUAL-FUEL RANGE JDRP548H
Electrical Zone Width (A)	22" (55.9 cm)	28" (71.1 cm)	40" (101.6 cm)
Electrical Zone Height (B)	15" (38.1 cm)	15" (38.1 cm)	15" (38.1 cm)
Electrical Zone Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)


#### ELECTRIC REQUIREMENTS CHECKLIST

- A 240 volt, 60 Hz, fused, grounded circuit is required.
- For 30" and 36" ranges, use a 40-amp circuit.
- For 48" ranges, use a 50-amp circuit.
- A dedicated circuit is recommended.

#### RECOMMENDED ELECTRICAL ZONE

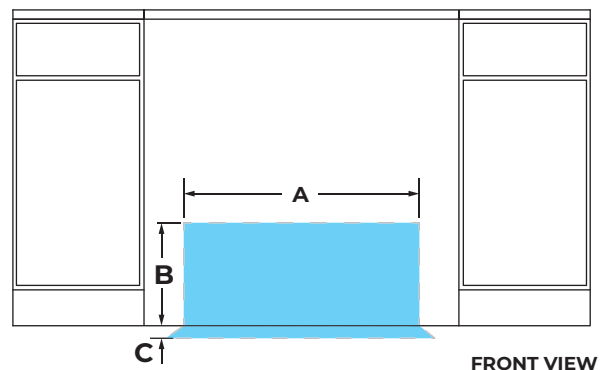

#### WIDTH TO ELECTRICAL CONDUIT

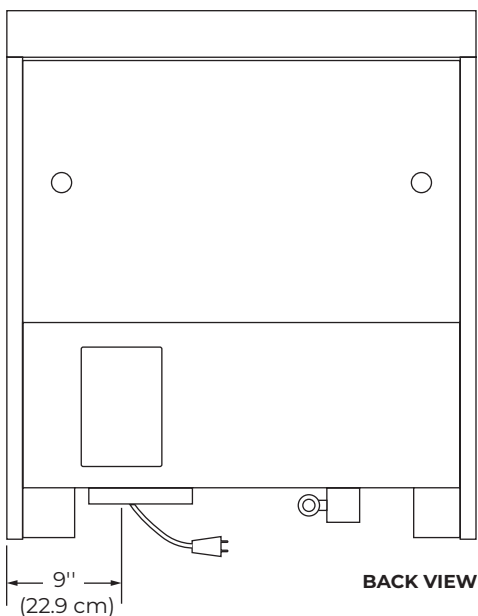

IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY, CALL A LICENSED, QUALIFIED ELECTRICIAN.


# JENNAIR® DIMENSIONS

## DUAL-FUEL RANGES


### GAS REQUIREMENTS

	30" CONNECTED DUAL-FUEL RANGE JDRP430H	36" CONNECTED DUAL-FUEL RANGE JDRP436H	48" DUAL-FUEL RANGE JDRP548H
Gas Opening Width (A)	6" (15.2 cm)	14" (35.6 cm)	24" (61 cm)
Gas Opening Height (B)	3" (7.6 cm)	3" (7.6 cm)	3" (7.6 cm)
Gas Opening Depth (C)	5" (12.7 cm)	5" (12.7 cm)	5" (12.7 cm)
Distance from Side Cabinet to Gas Opening (D)	6" (15.2 cm)	6" (15.2 cm)	6" (15.2 cm)
Width to Gas Inlet (E)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)	12-3/4" (32.4 cm)

#### RECOMMENDED GAS ZONE

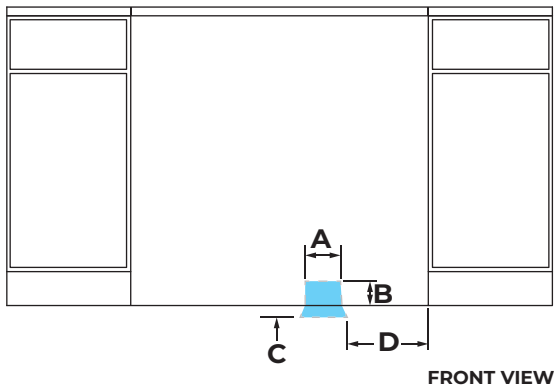

#### WIDTH TO GAS INLET

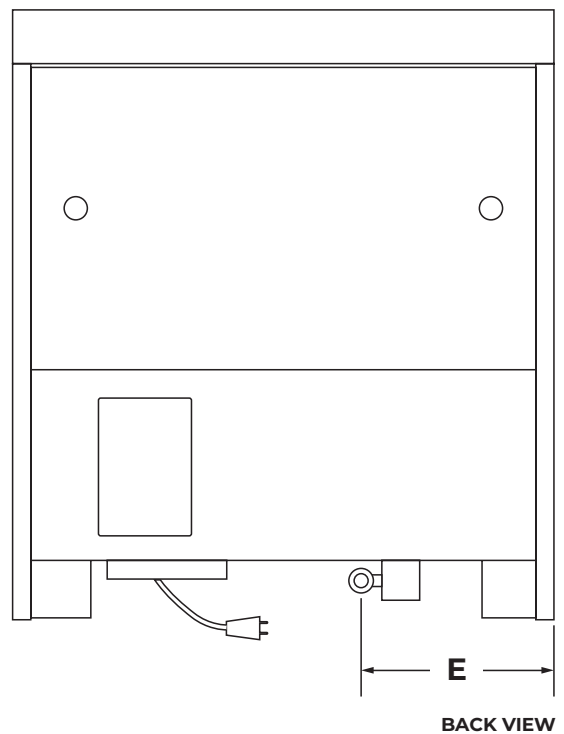

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY,  
CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.