



TYPE	
PART NO.	
QTY	
DATE	
SIGNATURE	

PRODUCT SPECIFICATIONS

# Inspire V4 Nude™ LED Tape Light

## About

- Available in Bright (2.2W) and Super Bright (4.2W)
- 1800K, 2100K, 2700K, 3000K, 3500K, & 4000K
- Compatible with Zeus™ Connectors
- Requires an LED driver to power

## Part Numbers & Ordering

CCT	Brightness	Length
V4 - NUDE - [ ] - [ ] - BLK - [ ]		
18 1800K	B Bright	16 16ft Roll
21 2100K	SB Super Bright	50 50ft Roll
27 2700K		100 100ft Roll
30 3000K		CUSTOM Custom Length (by the foot)
35 3500K		
40 4000K		

Ordering Examples

Example Part Number	QTY	Amount to Receive
V4-NUDE-SB-BLK-30-CUSTOM	12	12FT
V4-NUDE-B-BLK-27-100	2	(2) 100FT Rolls
V4-NUDE-B-BLK-40-16	5	(5) 16FT Rolls

## Connectors, Channel, & Drivers

Compatible Connectors


- Zeus™ Connectors

Compatible Channel

- Inspire Square
- Inspire Slim
- Inspire Angled
- Inspire Recessed

Compatible LED Drivers

- DimALL™ Dimmable Drivers
- Electronic 0-10V Dimmable Drivers
- Non-Dimmable Plug-In Drivers

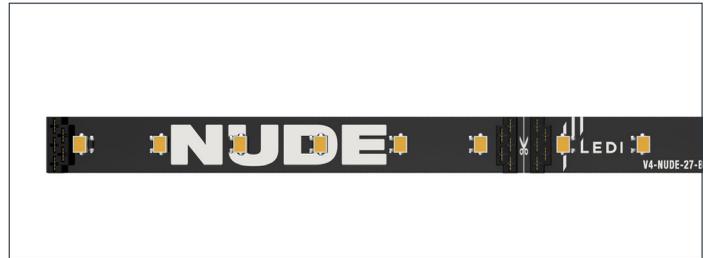

## Specifications

Available Color Temperatures:

- 1800K
- 2100K
- 2700K
- 3000K
- 3500K
- 4000K

Power:

- Bright: 2.2 Watts/FT
- Super Bright: 4.2 Watts/FT

Lumen Output: See "Performance" on pg. 2 for details

CRI: 94+

Maximum Length:

- Bright: 45FT
- Super Bright: 23FT

Cut Length: Every 4"

Input Voltage: 24VDC

Physical Color: Black

Beam Angle: 120°

Lamp Life: 50,000 Hours

Max Ambient Temperature: -4°F to 113°F (-20°C to 45°C)

Max Operating Temperature: -22°F to 140°F (-30°C to 60°C)

Dimensions (W x H): 1/2" x 1/8"

Environment: IP20 Indoor

Adhesive: 3M VHB Red

Dimming:

- 0-10V
- MLV
- ELV
- Incandescent
- CFL/LED

Certifications & Safety Standards:

- UL Listed for The United States and Canada - File # E467147
- UL Listed per UL2108 Low Voltage Lighting Systems/CSA C22.2 No 250.0-08-Luminaires/UL8750
- Title 24 JA8 Compliant
- Always review all local and national safety standards before installing any LEDI product(s).

Part numbers and specifications may be found in the applicable product spec sheet.



TYPE	
PART NO.	
QTY	
DATE	
SIGNATURE	

PRODUCT SPECIFICATIONS

# Inspire V4 Nude™ LED Tape Light

## Performance

Bright (2.2W)						
Color	1800K	2100K	2700K	3000K	3500K	4000K
Lumens/FT	115	140	145	165	175	180
Efficacy	52 lm/W	64 lm/W	66 lm/W	75 lm/W	80 lm/W	82 lm/W
CRI	94+	94+	94+	94+	94+	94+
R9	87	87	87	88	74	89
Rf	87	91	93	93	88	80
Rg	109	106	99	102	96	98
Super Bright (4.2W)						
Color	1800K	2100K	2700K	3000K	3500K	4000K
Lumens/FT	225	260	270	310	325	335
Efficacy	54 lm/W	62 lm/W	64 lm/W	74 lm/W	77 lm/W	80 lm/W
CRI	94+	94+	94+	94+	94+	94+
R9	84	84	83	86	82	83
Rf	87	91	93	93	88	80
Rg	109	106	99	102	96	98