

# PlumBite® Push On Reducing Coupling

## Specifications

- A heat-free method of joining Copper, CPVC, PE-RT or PEX tubing. Fittings can be removed and re-used, using the disassembly tool (sold separately).

## Applications

- Commercial and residential potable and non-potable water applications

## Materials

- Body-DZR Brass
- O-Ring- EPDM, Peroxide Cured
- Gripper Ring- Stainless Steel

Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
Tag	_____ PO# _____




## Dimensions and Product Offering

Part Code	Part Code Bulk	A -Nominal (in.)	B -Nominal (in.)	C -(in.)	C -Tolerance +/- (in.)
C77406LF	C76502LF	1/2	3/4	2.11	0.06
C77407LF	-	3/4	1	2.40	0.03
C77408LF	-	3/8	1/2	1.93	0.08
C77409LF	-	1	1-1/4	2.89	0.08
C77410LF	-	1/4	1/2	1.73	0.08

## Performance Specifications

- Maximum Temperature: 180°F
- Maximum Pressure: 200 PSI
- Service: Potable Water
- Exposure to water with elevated levels of inorganic materials (including but not limited to: Cl, Na, Mg, Ca, K), especially in high temperatures and high water velocity areas, could quicken the corrosion process.

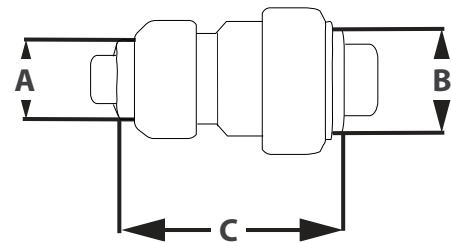

## Certifications/Listings/Approvals

- NSF/ANSI/CAN 61
- NSF/ANSI/CAN 372
- NSF/ANSI 14
- IAPMO listed
- IAPMO certified for use in manufactured joints without access panels
- ASSE 1061

