

PlumBite® Push On Water Heater Connector with Ball Valve

Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
Tag	_____ PO# _____

Specifications

- A heat-free method of joining Copper, CPVC, PE-RT or PEX tubing. Fittings can be removed and re-used, using the disassembly tool (sold separately).

Applications

- Commercial and residential potable and non-potable water applications

Materials

- Gasket- EPDM, Peroxide Cured
- Valve Body- Brass




Dimensions and Product Offering

Part Code	A -Nominal (in.)	B Nominal (in.)	C -(in.)	C -Tolerance +/- (in.)
C77477LF	3/4 FIP	3/4 FIP	18.18	0.03
C76616LF	3/4 FIP	1/2 FIP	18.55	0.40
C76617LF	3/4 FIP	3/4 FIP	18.55	0.40

Performance Specifications

- Maximum Temperature: 180°F
- Maximum Pressure: 200 PSI
- Service: Potable Water
- Exposure to water with elevated levels of inorganic materials (including but not limited to: Cl, Na, Mg, Ca, K), especially in high temperatures and high water velocity areas, could quicken the corrosion process.

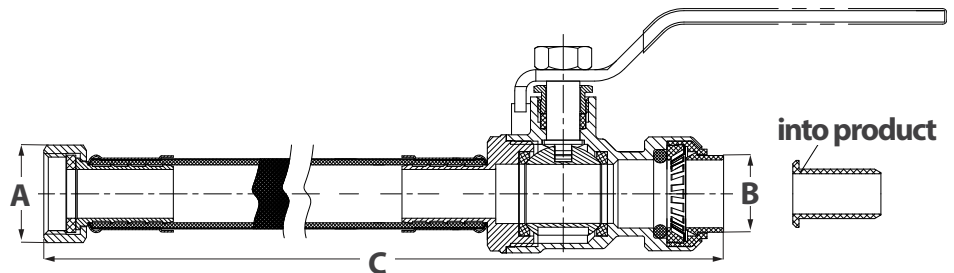

Certifications/Listings/Approvals

- NSF/ANSI/CAN 61
- NSF/ANSI/CAN 372
- IAPMO/ANSI Z1157
- ASME A112.4.14/CSA B125.14
- Vermont Act Compliant
- SDWA Compliant
- Lead Law Compliant
- MASS Approved

