


### FEATURES & BENEFITS

- Prevents lime scale buildup on water heater elements
- No maintenance, No power, or filter replacements
- Eliminates up to 76% of lime scale deposits
- IAPMO Certified
- Provides reliable protection for your water heater
- Patented TGP® Technology (Turbulent Galvanic Polarization)
- Saves energy and money




- Min./max. Pressure (inlet): 4 psi/145 psi
- Min./max. (Inlet): 40°F - 210°F
- Flow rate: 14.1 gal./min.

### FRONT VIEW

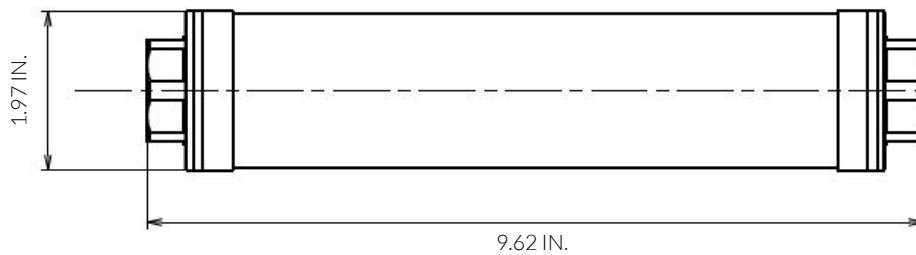


### SIDE VIEW

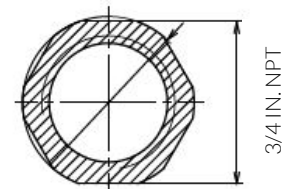

### MATERIAL SPECIFICATIONS

Part	Material
1 Housing (Body)	Stainless Steel
2 Core Tube	POM-C (Engineered Plastic)
3 Turbine Disc A	Copper
4 Turbine Disc B	Titanium
5 Reduction Cap	Stainless Steel
6 Seal	EPDM

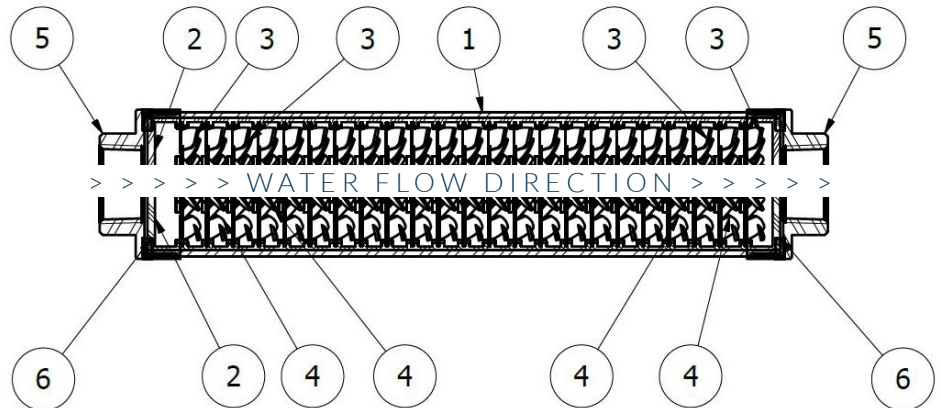

### FLOW RATE & PRESSURE DROP

Flow Rate (US gal/min)	Pressure Drop (PSI)
9.2	1.5
12.2	2.9
14.9	4.4
16.9	5.8
18.8	7.3
20.5	8.7
22.1	10.2
23.8	11.6
25.0	13.1
26.5	14.5

### SPECIFICATIONS

