



# OCS<sup>2</sup> FILTER CARTRIDGE

System Part Number: EV9618-02



## APPLICATIONS

- ◆ Coffee
  - Low flow, medium volume brewers

## FEATURES • BENEFITS

- ◆ Integrated scale inhibitor minimizes the potential for scale formation\* to ensure reliable, efficient equipment operation
- ◆ Exclusive precoat filtration provides chlorine taste & odor reduction, and micro-filters sediment down to 0.2 micron†
- ◆ Easy, sanitary, quick-change cartridge replacement
- ◆ Proprietary Micro-Pure II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life
- ◆ NSF/ANSI Standard 42 certified for Bacteriostatic Effects and the reduction of Chlorine Taste and Odor, and Particulate Class I
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means
- ◆ NSF/ANSI Standard 401 certified for Microplastics Reduction

## INSTALLATION TIPS

- ◆ Install vertically and allow 2 1/2" (6.35 cm) clearance below the cartridge for easy removal and replacement.
- ◆ Flush cartridge by running water through the filter for five (5) minutes.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ It is recommended to replace cartridge at least once a year.


\* As tested by Pentair

† Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters.

EPA Est. No. 002623-IL-002

# OCS<sup>2</sup> REPLACEMENT CARTRIDGE

EV9618-02

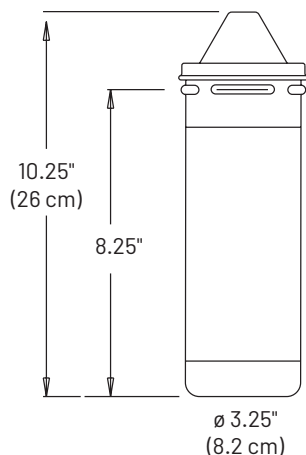

## Specifications

### Overall Dimensions

10.25" H x 3.25" D (26.0 cm x 8.2 cm)

### Service Flow Rate

Maximum 0.5 gpm (1.9 Lpm)

### Rated Capacity

1,500 gallons (5,678 L) or 3,000 pots

### Operating Pressure

10 - 125 psi (0.7 - 8.6 bar), non-shock

### Water Temperature

35 - 100°F (2 - 38°C)

### Electrical Connection

None required

For Pentair Everpure Product Warranties visit:  
<http://pentair.com/assets/foodservice-warranty>

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.



System Tested and Certified by NSF International against NSF/ANSI Standards 42, 53, and 401 for the reduction of:

STANDARD NO. 42 –  
AESTHETIC EFFECTS  
Bacteriostatic Effects

Chemical Reduction  
Taste & Odor  
Chlorine

Mechanical Filtration  
Nominal Particulate Class I

STANDARD NO. 53 –  
HEALTH EFFECTS  
Mechanical Filtration  
Cyst  
Asbestos

STANDARD NO. 401 –  
EMERGING COMPOUNDS /  
INCIDENTAL  
CONTAMINANTS  
Mechanical Filtration  
Microplastics



1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | [cseverpure@pentair.com](mailto:cseverpure@pentair.com) | [foodservice.pentair.com](http://foodservice.pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2023 Pentair. All rights reserved.

EV9618-02 JL23