

DXMC Series (M-Style)


EVAPORATOR COILS

Specification Sheet

The DXMC Series high-efficiency evaporator M-Coils provide an excellent option where low profile installations are required. The coils are applicable in up-flow or down-flow configurations. Each coil comes TXV ready with threaded equalizer port and liquid connection for simple field installation of OEM expansion valves. Multiple pistons sized for the nominal tonnage span of each coil are included for fixed orifice metering.

Features:

- R-22 or R-410A
- Bi-Directional Airflow
- Enhanced Aluminum Fins
- Rifled Copper Tubing

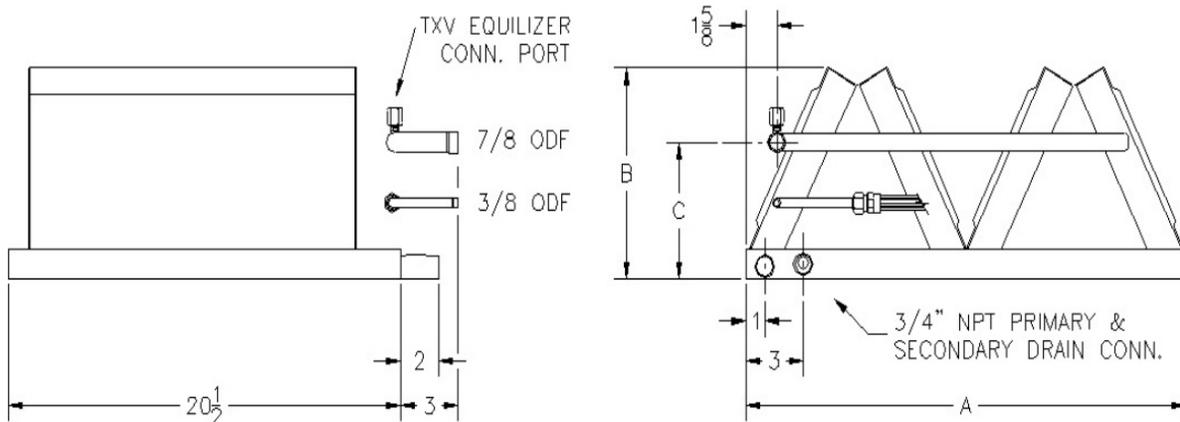

Model- DXAC	Face (ft ²)	Coil Rows	A	B	C
1836	3.67	2	17"	8 ¼"	5"
3048	4.58	2	21"	10 ⅛"	6 ¾"
4260	5.50	2	24"	12"	8 ⅝"

Capacities:

Model DXMC-	CFM	Air PD ("wg)	R-22 M BTU/HR		R-410A M BTU/HR	
			Total	Sensible	Total	Sensible
1836	600	0.11	27.6	18.4	29.7	19.6
	800	0.16	32.7	22.5	35.8	23.8
	1000	0.22	36.4	25.9	40.8	27.8
	1200	0.29	39.4	29.0	44.9	31.3
3048	1000	0.17	42.6	28.7	47.2	30.8
	1200	0.22	47.6	32.7	51.0	34.2
	1400	0.28	51.7	36.1	56.0	38.1
	1600	0.34	55.3	39.4	60.6	41.6
4260	1400	0.21	55.1	38.0	60.0	40.3
	1600	0.25	59.1	41.4	65.1	44.2
	1800	0.30	62.7	44.6	69.6	47.8
	2000	0.35	65.7	47.5	73.6	51.1

The DXMC Series may be used to replace coils outside of these capacities. For cooling only coils, select the model that most closely matches the face area and slab rows of the coil to be replaced. For heat-pump coils, the internal volume of the replacement coil must be within 3% of the coil to be replaced. The DXMC coil shall be metered to match the system condensing/heat-pump unit and charged accordingly.

Diversified Heat Transfer, Inc.
439 Main Road, Rte. 202
Towaco, NJ 07082

CONTACT US
P. 718-386-6666 / 800-221-1522
F. 718-386-7809
E. dht@dhtnet.com

FOLLOW US @
facebook.com/diversifiedheattransfer
twitter.com/DiversifiedHeat
linkedin.com/diversified-heat-transfer

Scan Here

