

DESCRIPTION

- Fixed mount showerhead
- Finish identifiable by suffix
- 1/2" IPS connection
- Metal Shower Ball

OPERATION

- Six functions
- Rotate outer ring to select function

FLOW

- Designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi


STANDARDS

- Third party certified at WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

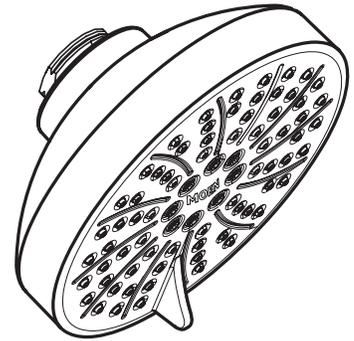

6-Function Eco-Performance Showerhead

Model: 6512EP series

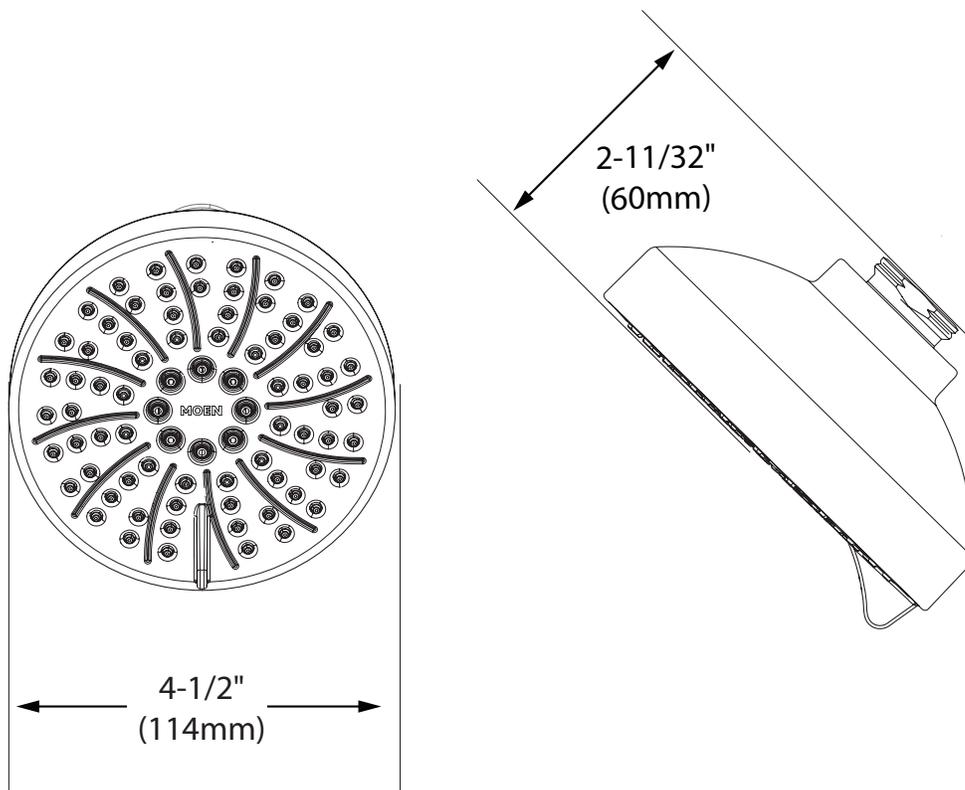

CRITICAL DIMENSIONS

(DO NOT SCALE)