


# BRIZO®

## INTEGRATED SHOWER DIVERTER TRIM

- Atavis™ Bath Collection
- MultiChoice® Valve Trim with Three Function Diverter (T75542)
- MultiChoice® Valve Trim with Six Function Diverter (T75642)

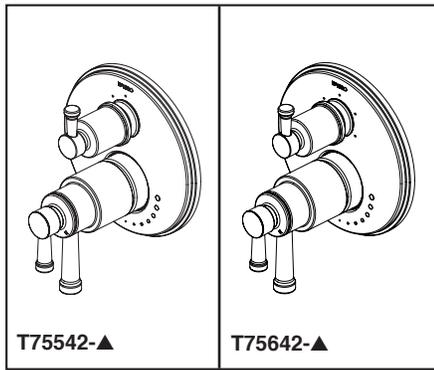

Submitted Model No.: \_\_\_\_\_



Specific Features: \_\_\_\_\_

### FEATURES:

- TempAssure® Thermostatic Valve Cartridge

### STANDARD SPECIFICATIONS:

- Main control utilizes thermostatic valve cartridge
- Thermostatic wax element maintains the outlet temperature to  $\pm 3.6^\circ\text{F}$
- Back-to-back installation capability
- For use with MultiChoice® Universal Integrated Shower Diverter Rough (R75000 Series)
- Max. system flow rate 7.2 gpm @ 60 psi with R75000
- Top handle controls diverter functions
- Bottom (2) handles control on/off and temperature
- Field adjustable to limit handle rotation into hot water zone
- Bottom handle  $90^\circ$  Maximum rotation
- Hot/cold indicator markings
- Three function diverter (T75542-▲) has 2 individual positions and 1 shared position
- For two individual functions, no shared functions, order additional RP72123
- Six function diverter (T75642-▲) has 3 individual positions and 3 shared positions
- For three individual functions, no shared functions, order additional RP72124
- $1/2$ " rough-in.
- Cartridges included
- Standard installation allows up to  $1 1/8$ " finished wall thickness
- Thick wall installation kit RP90545▲ can be ordered to allow for up to  $2 1/8$ " finished wall thickness

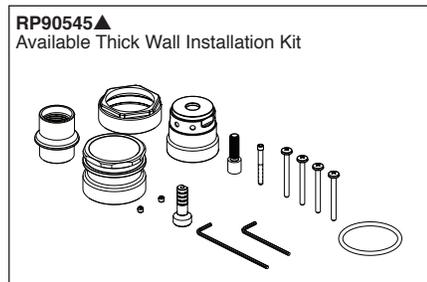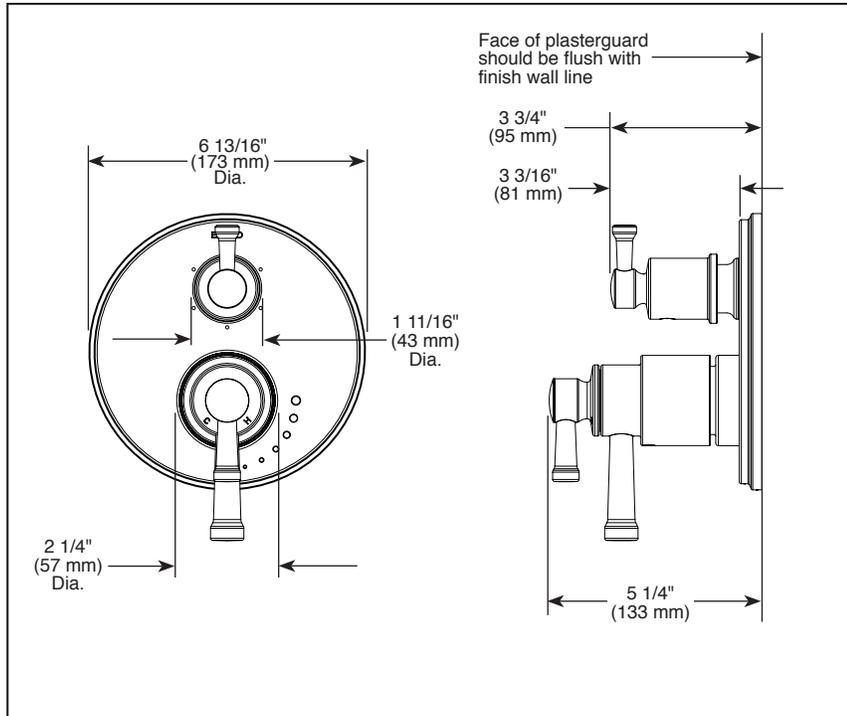

▲ Designate Proper Finish Suffix

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
-  Indicates compliance to ICC/ANSI A117.1 - Valve control only