


# BRIZO®


## TUB AND SHOWER FAUCET TRIM

- Atavis™ Bath Collection
- TempAssure® Thermostatic
- Valve Only (T60042)
- Shower Only (T60242)

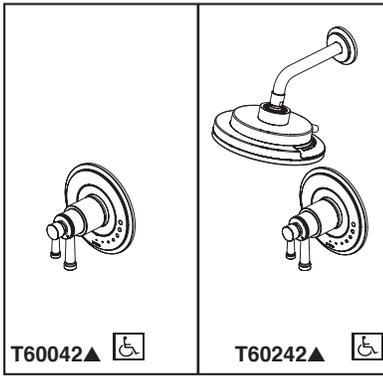

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

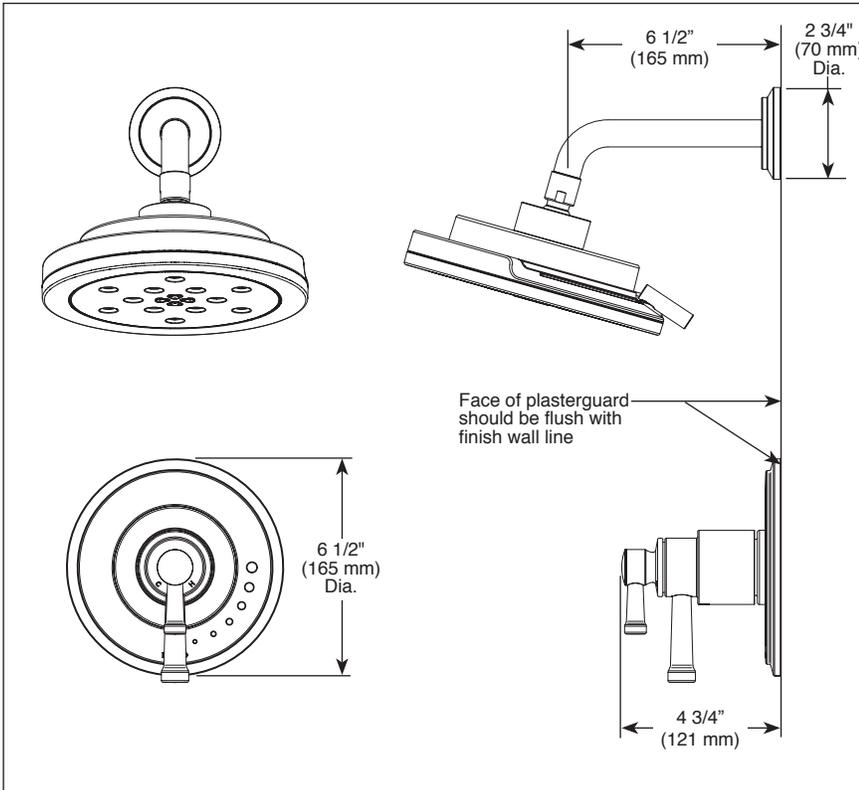

### FEATURES:

- TempAssure® thermostatic valve cartridge
- Multi-function shower head featuring H<sub>2</sub>Okinetic Technology

### STANDARD SPECIFICATIONS:

- Multi-function shower head featuring H<sub>2</sub>Okinetic Technology; 1.75 gpm @ 80 psi, 6.6 L/min @ 552 kPa
- Maximum system flow rate 9.4 gpm @ 60 psi with R60000-UNBXHF
- Thermostatic wax element maintains the outlet temperature to ±3.6°F
- Must also order MultiChoice® Universal rough valve body (R60000 Series)
- Back-to-back installation capability
- Bottom (2) handles control on/off and temperature
- Graphics indicate hot/cold temperature adjustment
- Field adjustable to limit handle rotation into hot water zone
- All parts replaceable from the front of the valve
- Adjusts for up to 1" wall thickness. Optional extension kit (RP74785) extends rough installation up to 1 3/4"

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

**87442▲ Shower Head**

H<sub>2</sub>Okinetic Technology® Full Body

H<sub>2</sub>Okinetic Technology® Invigorating

Massaging Spray

Pause

8" (203 mm)

**RP74785 Available Extension Kit**



### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA WaterSense®

▲ Designate proper finish suffix