

SUBMITTAL DATA: MSZ-JP12WA-U1 & MUZ-JP12WA-U1

12,000 BTU/H WALL-MOUNTED HEAT PUMP SYSTEM

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
System Designation:	Schedule No.:	



ACCESSORIES:

Windscreens (ME-FR-15-17)
Anti-allergy Enzyme Filter (MAC-408FT-E)
Portable Central Controller (MCCH1)
Outside Air Sensor for MHK1 (MOS1)

Controls

Wired Remote Controller (PAR-33MAA)
Wireless Controller (MHK1)
Simple MA Remote Controller (PAC-YT53CRAU-J)
Thermostat Interface (PAC-US444CN-1)
System Control Interface (MAC-334IF-E)
Touch MA Controller (PAR-CT01MAU-SB)

NOTE: Test conditions are based on AHRI 210/240.

- ✦ 1: Rating conditions (Cooling) — Indoor: 80°FDB, 67°F WB, Outdoor: 95°FDB, (75°F WB)
(Heating) — Indoor: 70°FDB, 60°F WB, Outdoor: 47°FDB, 43°F WB
- ✦ 2: (Heating) — Indoor: 70°FDB, 60°F WB, Outdoor: 17°FDB, 15°F WB

ARI	Mode	Test	Indoor air condition (°F)		Outdoor air condition (°F)	
			Dry bulb	Wet bulb	Dry bulb	Wet bulb
SEER (Cooling)		"A-2" Cooling steady state at rated compressor speed	80	67	95	(75)
		"B-2" Cooling steady state at rated compressor speed	80	67	82	(65)
		"B-1" Cooling steady state at minimum compressor speed	80	67	82	(65)
		"F-1" Cooling steady state at minimum compressor speed	80	67	67	(53.5)
		"E-V" Cooling steady state at intermediate compressor speed #5	80	67	87	(69)
		"H1-2" Heating steady state at rated compressor speed	70	60	47	43
HSPF (Heating)		"H3-2" Heating steady state at rated compressor speed	70	60	17	15
		"H0-1" Heating steady state at minimum compressor speed	70	60	62	56.5
		"H1-1" Heating steady state at minimum compressor speed	70	60	47	43
		"H2-V" Heating steady state at intermediate compressor speed #5	70	60	35	33

#5: at intermediate compressor speed
= ("Rated compressor speed" - "minimum compressor speed") / 3 + "minimum compressor speed".

Outdoor unit model			MUZ-JP12WA
Capacity	Cooling *1	Btu/h	12,000 (3,800 - 12,200)
Rated (Minimum-Maximum)	Heating 47 *1	Btu/h	12,200 (4,500 - 14,500)
Capacity	Heating 17 *2	Btu/h	7,600 (9,000)
Rated (Maximum)			
Power consumption	Cooling *1	W	1,210 (240 - 1,300)
Rated (Minimum-Maximum)	Heating 47 *1	W	990 (240 - 1,220)
Power consumption	Heating 17 *2	W	800 (990)
Rated (Maximum)			
EER *1 [SEER] *3	Cooling		9.9 [17.0]
HSPF IV *4	Heating		9
COP	Heating *1		3.61
Power factor	Cooling	%	93
	Heating	%	94
Power supply	V, phase, Hz		115, 1, 60

Indoor unit

Indoor unit	MCA (°)	A	1.4
	Fan Motor	F.L.A	1.07
	Air flow (Lo-Mid-High-Super High)	CLG DRY(CFM)	170 - 237 - 321 - 399
		CLG WET(CFM)	134 - 201 - 286 - 364
	Moisture removal	pt./h	2.5
	Sound Level CLG (Low-Med-Hi-Super High)	dB (A)	22 - 30 - 37 - 45
	Sound Level HTG (Low-Med-Hi-Super High)	dB (A)	22 - 37 - 30 - 43
	External Finish Color		Munsell 1.0Y 9.2/0.2
	Dimensions	W: in	31-7/16
		D: in	9-1/8
		H: in	11-5/8
	Weight Unit	lbs	22
	Field Drainpipe O.D.	in	5/8


Outdoor unit

Max. fuse size (time delay) (*)		A	20
Min. circuit ampacity (*)		A	14
Fan motor	F.L.A	A	0.7
Compressor	Model		KNB073FRXMC
	R.L.A	A	10.4
	L.R.A	A	13
	Refrigeration oil	fl oz. (L) (Model)	9.1 (0.27) (FV50S)
Refrigerant control			Linear expansion valve
Sound level *1	Cooling	dB(A)	49
	Heating	dB(A)	51
Airflow	Cooling	CFM	1,105 - 1,105 - 1,063
	Heating	CFM	1,282 - 1,105 - 1,105
Fan speed	Cooling	rpm	770 - 770 - 740
	Heating	rpm	890 - 770 - 770
Defrost method			Reverse cycle
Dimensions	W	in.	31-1/2
	D	in.	11-1/4
	H	in.	21-5/8
Weight		lb.	73
External finish			Munsell 3Y 7.8/1.1
Refrigerant piping			Not supplied
Refrigerant pipe size (Min. wall thickness)	Liquid	in.	1/4
	Gas	in.	3/8
Connection method	Indoor		Flared
	Outdoor		Flared
Between the indoor & outdoor units	Height difference	ft.	40
	Piping length	ft.	65
Refrigerant charge (R410A)			1 lb. 12 oz.

Specifications are subject to change without notice

DIMENSIONS: MSZ-JP12WA-U1 & MUZ-JP12WA-U1




Unit: inch

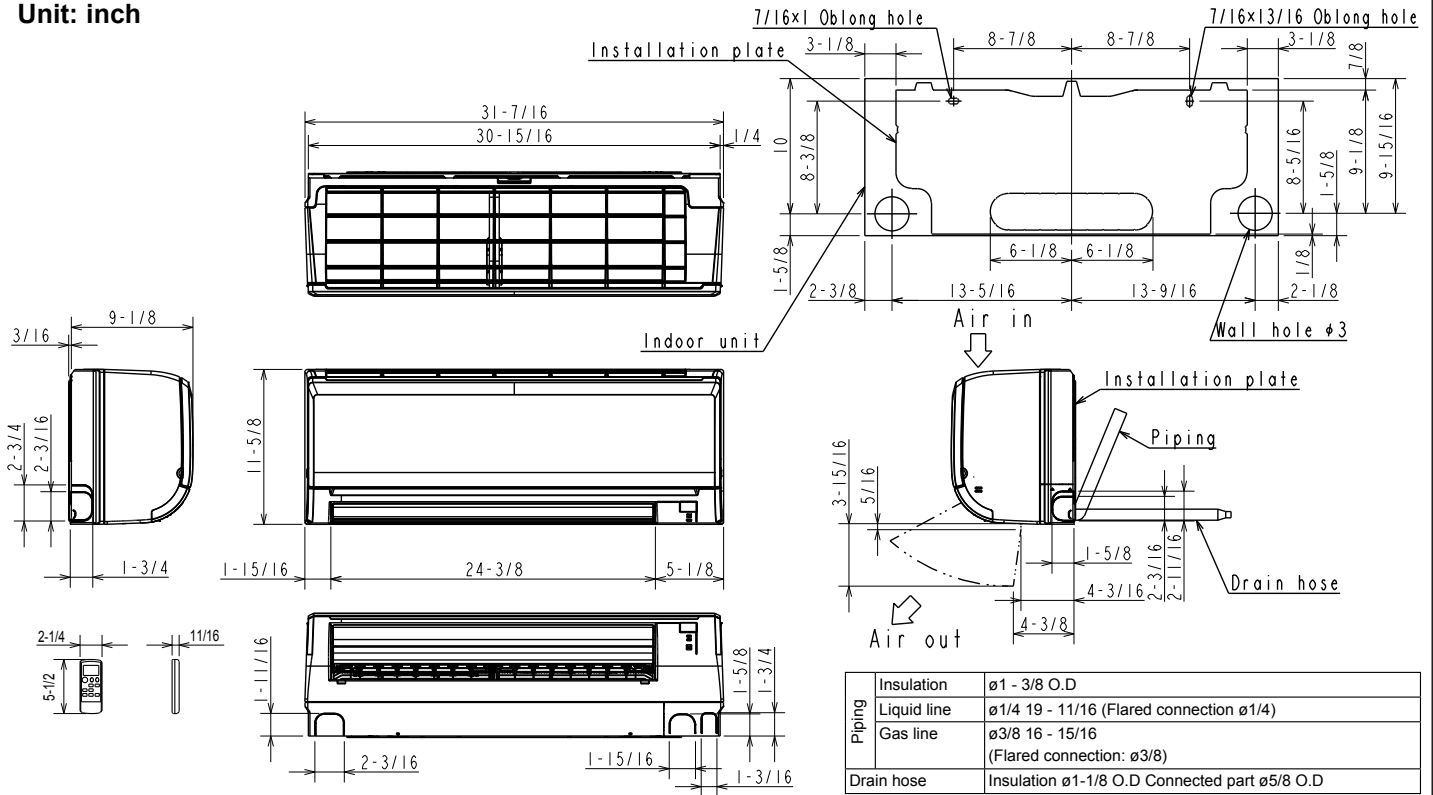

Unit: inch

REQUIRED SPACE

*1 4 in. (100 mm) or more when front and sides of the unit are clear

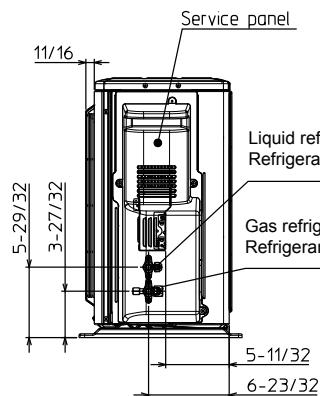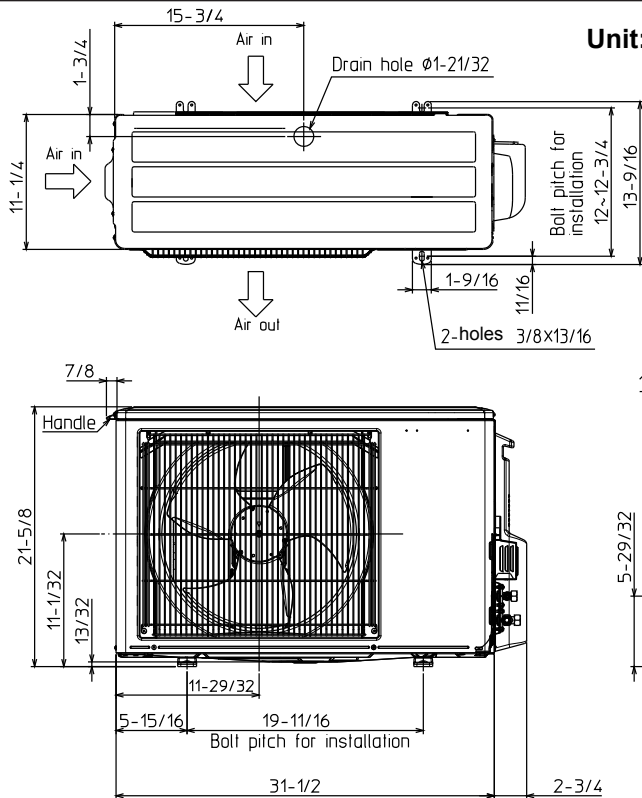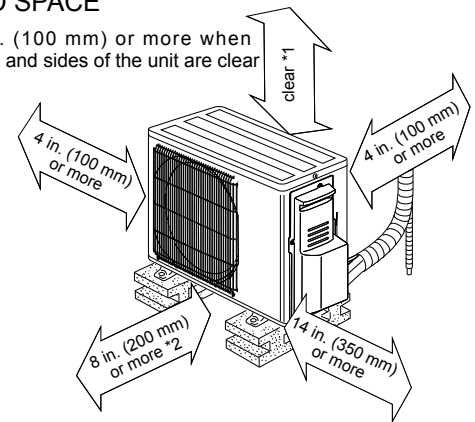

Form # SB_MSZ-JP12WA-U1_MUZ-JP12WA-U1_201908
Specifications are subject to change without notice.
www.MitsubishiElectric.ca
© 2019 Mitsubishi Electric Sales Canada Inc.