


COPPERLOC® Non-Removable Copper Push End Reducer Coupling CxC $(\frac{34}{7}x\frac{1}{2})^2$ through $1^n x \frac{34}{7}$)







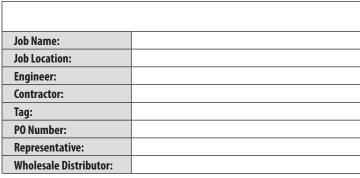











DESCRIPTION

The CopperLoc® 901-R Non-Removable Push Reducer Coupling features a Lead-Free dezincification resistant copper body, a Stainless Steel Grab Ring, a Nylon Separation Ring and an EPDM O-Ring. CopperLoc® products are manufactured utilizing proven ASTM materials and standards. Proudly Made In The USA.

FEATURES

- · Lead-Free Construction
- · No special tools required
- Approved for underground installation (per local installation code)
- cUPC® Compliant
- ARRA Compliant
- AWWA Compliant
- NSF/ANSI NSF-372 ~ *Lead Free (LF)

PERFORMANCE RATING

 CopperLoc® products are pressure rated at a maximum of 200 psi (13.7 bar) over a temperature range from 0°F to 250°F (17°C to 121°C) for various liquids and gases.

OPTIONS & SIZES

• 3/4" x 1/2", 1" x 1/2", 1" x 3/4"

APPROVALS


- NSF/ANSI NSF 61 ~ Water Quality
- ASSE 1061
- IAPMO File Listings: 4951
- Guide MHKZ: No. 6 oil at 250°F

STANDARD MATERIALS LIST

Part Name	Material				
Body	UNS C12200 Copper				
Grab Ring	Stainless Steel				
Support Ring	Nylon				
0-Ring	EPDM				
Lubrication	Silicone, ANSI/NSF-61 Listed				

DIMENSIONS

Item No.	Size	Dimensions (in.)							Wt.	
	(in.)	Α	В	C	D	E	Height	Width	Depth	(lbs.)
10170715	901-R ¾ x ½ CXC	1.87	1.20	0.72	0.43	0.66	1.20	1.87	1.20	0.11
10170720	901-R 1 x ½ CXC	1.84	1.49	0.78	0.49	0.66	1.48	1.84	1.48	0.15
10170725	901-R 1 x ¾ CXC	1.77	1.49	0.78	0.31	0.72	1.49	1.77	1.49	0.15



This specification is provided for reference only. Elkhart Products Corporation reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to any Elkhart products previously or subsequently sold. Please visit our website @ www.elkhartproducts.com for the most current information.

Elkhart Products Corporation 1255 Oak Street, Elkhart, IN 46514 USA www.elkhartproducts.com | (574) 264-3181



^{*} LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.