

## LIL MAX EXTENSIONS INSTALLATION



Each extension provides up to 9" of height extension. If more than 9" of extension is required, stack multiple extension assemblies.

### YOU NEED:

- SELF ADHESIVE FOAM GASKET (10 FT.)
- (4) SELF TAPPING SCREWS
- (2) LONG AND SHORT BOLTS
- FLAT AND LOCK WASHER, NUTS

### EQUIPMENT REQUIRED:

- UTILITY KNIFE
- HAND DRILL WITH 3/8" BIT WRENCH  
OR SOCKET KEY

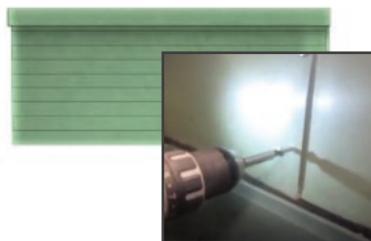


#### STEP 1:

Measure the height from the top of the interceptor to the desired ground level.

#### STEP 2:

Measure the height from the top of the interceptor to the desired ground level. Connect the 2 extension halves by using the self tapping screws. (To avoid injury during inside cleaning, tap the screws from inside out).



#### STEP 4:

Attach the self-adhesive foam gasket on all sides of the top rail of the interceptor.



#### STEP 5:

Attach the extension by aligning its edges with the top rail of the interceptor (make sure that all extension edges are sitting onto foam gasket).

#### STEP 6:

Slide the bolts through the top hole of the extension and interceptor hole made in Step 3. Place the lock washer under the bolt head. Use the flat washer and nut to tighten and assemble. Do the same for the opposite side. Choose the bolt length accordingly with the height of extension.

#### STEP 7:

Attach the lid on top of the extension and secure with rotating lockers.