


PRODUCT NAME: Rail Vanity Bath
 ITEM NUMBER: 52100 52102 52103 52104

Please consult a qualified electrician for hanging fixture and wiring.
CAUTION: Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.
 Carefully unpack and identify all parts before assembly

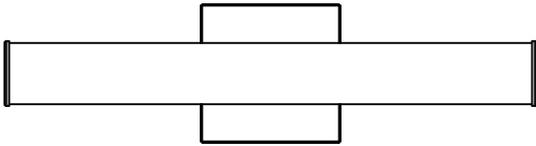

This fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a List of Recommended Dimmers:

- Lutron MACL-153M
- Lutron DVL-153P
- Lutron SCL-153P
- Leviton IPL06-10Z
- Leviton 6674-POW

Due to inrush current wattage should not exceed 150 Watts of product for a 600 Watt dimmer.

12W 16W 20W 24W
 120VAC LED

1. Always disconnect power at the main electrical panel before installation.

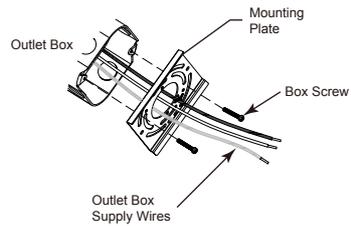


Fig. 1

2. Pull wall box wires through center hole of mounting plate. Secure mounting plate to wall using screws so that the fixture mounting points are aligned vertically. (See Fig. 1)

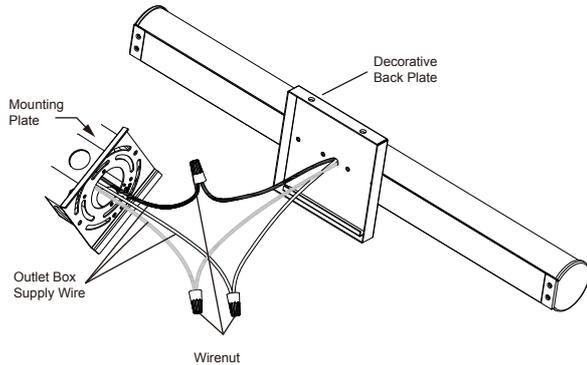


Fig. 2

3. Follow wiring instructions Fig. 2.

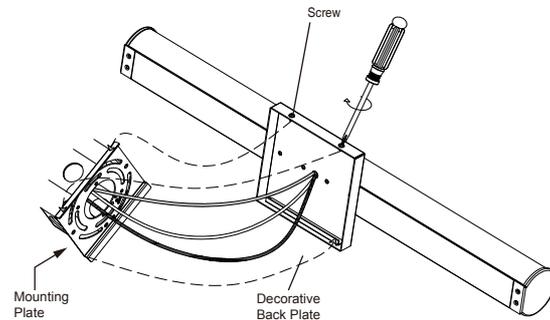


Fig. 3

4. After connecting all wires, push all wires and wirenuts back through center hole of mounting plate and into the cavity of the electrical box, while positioning the fixture to align with the mounting points / tabs.

5. Secure decorative back plate with screws at top to the mounting plate. (See Fig. 3)