

PPF80VSSFN Series

Van Stone Flange

PVC SCH 80



Product Features

- Working non-shock pressure: 150 PSI at 73°F
- Media temperature range: 32°–140°F
- Not for use with compressed air or gases
- Socket diameters conform to ASTM D2467
- Bolt hole pattern conforms to ANSI B16.5; ASTM D4024
- Diameter conforms to ASME/ANSI B16.5 Class 150 Standard
- Certified to NSF/ANSI 372, NSF/ANSI 14, NSF/ANSI/CAN 61



Codes and Certifications


PPF80VSSFNK



Dimensions (inches)

Model No.	Nom. Size	A	D3	D2	d	b	P	M	T	L	e	n
PPF80VSSFNK	2	2.159	6.000	4.750	2.387	2.369	1.500	2.889	0.807	1.578	0.750	4
PPF80VSSFNL	2-1/2	2.567	7.000	5.500	2.889	2.868	1.750	3.560	0.890	1.938	0.750	4
PPF80VSSFNM	3	3.173	7.500	6.000	3.516	3.492	1.875	4.250	1.004	2.250	0.750	4
PPF80VSSFNP	4	4.335	9.000	7.500	4.518	4.491	2.250	5.310	1.070	2.438	0.750	8
PPF80VSSFNU	6	6.122	11.000	9.500	6.647	6.614	3.000	7.560	1.333	3.250	0.875	8
PPF80VSSFNX	8	8.244	13.500	11.750	8.655	8.610	4.000	9.528	1.398	4.375	0.875	8

All measurements are nominal. Please verify before actual installation.

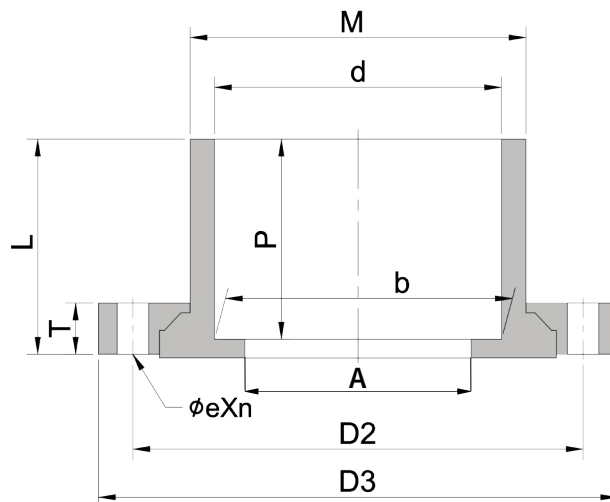

For detailed warranty information, visit ferguson.com/PROFLO-1-year-warranty.