


CA SERIES

UNCASED COPPER UPFLOW/DOWNFLOW

FEATURES, DIMENSIONS, & SPECIFICATIONS

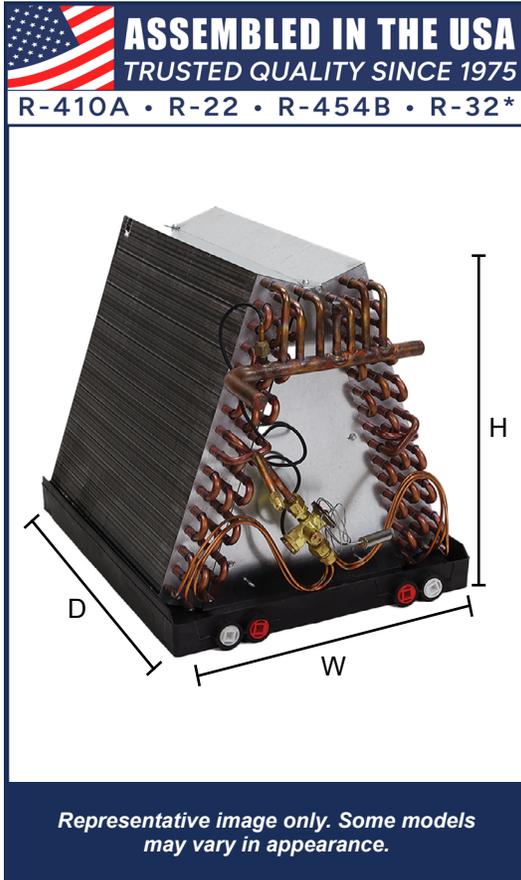

FEATURES AND BENEFITS:

- Rifled copper tubing, enhanced aluminum fins.
- Immersion tested at 500 psi, then Nitrogen pressurized and factory sealed for maximum reliability.
- Schrader provided for pressure assurance testing.
- Left and right-hand standard refrigerant/plumbing connections:
 - Liquid line: 3/8" ODS
 - Suction line:
 - 3/4" ODS on 1-1/2-ton to 3-ton
 - 7/8" ODS on 3-1/2-ton to 5-ton
- Codensate Drains: 3/4" NPT
- Heavy gauge plastic drain pans on most models.
- Standard Upflow without field modification. Downflow applications require field kit, sold separately.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-410A, R-22, R-454B, and R-32 when proper metering device is used.
- Ten-year limited warranty with registration.



CUSTOMIZATION

- Factory or field-installed TXV available.
- Powder-painted metal pans.
- Refrigerant Detection System (RDS) kit factory-installed.
- Left and right refrigerant connections to match OEM(s).

DOWNFLOW KITS

METAL DRAIN PANS:

- 16" DWNFLWM-16 • 18" DWNFLWM-18

PLASTIC DRAIN PANS:

- DWNFLWP



SCAN THE QR CODE FOR MORE INFORMATION ON ASPEN'S CA SERIES COILS

For full warranty details, please visit the *Warranty Information* tab on Aspen's website. To quickly find the ideal AHRI-certified match for any Aspen coil, air handler, or Aspen PRO air handler, check out our AHRI Quick Match tool on the Resources page.



In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligations. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. CA Spec-2025-05

SPECIFICATIONS & PERFORMANCE:

COIL MODEL	NOM. CAPACITY (BTU)	LIQ. LINE (OD)	SUC. LINE (OD)	DRAIN PAN SIZE					SHIPPING INFO.				
				STANDARD WIDTH (W)				DEPTH (D)	COIL ASSEMBLY HEIGHT (H)	WEIGHT (LBS)			SKID QTY
				13	16	19-1/2	23			# OF ROWS			
										2	3	4	
CA24A*	24,000	3/8	3/4	13 (4)	16 (4)	19-1/2	-	19-3/8	13-1/2	17	27	35	30
CA24B*			3/4	13 (4)	16 (4)	19-1/2	-		15-1/2	20	31	41	25
CA24C*			3/4	13 (4)	16 (4)	19-1/2	-		17-1/2	23	36	47	25
CA24D*			3/4	13 (4)	16 (4)	19-1/2	-		19-1/2	25	40	53	20
CA30A*	30,000		3/4	13 (4)	16 (4)	19-1/2	-		15-1/2	20	31	41	25
CA30B*			3/4	13 (4)	16 (4)	19-1/2	-		17-1/2	23	36	47	25
CA30C*			3/4	13 (4)	16 (4)	19-1/2	-		19-1/2	25	40	53	20
CA30D*			3/4	13 (4)	16 (4)	19-1/2	-		21-1/2	28	45	58	16
CA30E*			3/4	13 (4)	16 (4)	19-1/2	-		21-1/2	30	47	60	16
CA36A*	36,000		3/4	13 (4)	16 (4)	19-1/2	-		17-1/2	23	26	47	25
CA36B*			3/4	13 (4)	16 (4)	19-1/2	-		19-1/2	25	40	53	20
CA36C*			3/4	13 (4)	16 (4)	19-1/2	-		21-1/2	28	45	58	16
CA36D*		3/4	13 (4)	16 (4)	19-1/2	-	23-1/2	31	49	64	12		
CA42A*	42,000	7/8	-	16 (4)	19-1/2	23	25-1/2	25	40	53	20		
CA42B*		7/8	-	16 (4)	19-1/2	23	21-1/2	28	45	58	16		
CA42C*		7/8	-	16 (4)	19-1/2	23	23-1/2	31	49	64	12		
CA42D*		7/8	-	16 (4)	19-1/2	23	25-1/2	34	54	70	12		
CA48A*	48,000	7/8	-	16 (4)	19-1/2	23	21-1/2	28	45	58	16		
CA48B*		7/8	-	16 (4)	19-1/2	23	23-1/2	31	49	64	12		
CA48C*		7/8	-	16 (4)	19-1/2	23	25-1/2	34	54	70	12		
CA48D*		7/8	-	16 (4)	19-1/2	23	27-1/2	37	58	76	12		
CA48F*		7/8	-	16 (4)	19-1/2	23	25-1/2	36	56	72	12		
CA48G*		7/8	-	16 (4)	19-1/2	23	27-1/2	39	60	78	12		
CA60A*	60,000	7/8	-	-	19-1/2	23	19-3/8	25-1/2	34	54	70	12	
CA60B*		7/8	-	-	19-1/2	23	19-3/8	27-1/2	37	58	76	12	
CA60C*		7/8	-	-	19-1/2 (2)	23 (2)	21-3/4 (2)	24-1/2	38	60	79	12	
CA60D*		7/8	-	-	19-1/2 (2)	23 (2)	21-3/4 (2)	26-1/2	41	65	86	12	
CA60E*		7/8	-	-	-	24 (3)	21 (3)	26-1/2	46	73	95	12	
CA60F*		7/8	-	-	19-1/2	23	19-3/8	25-1/2	41	62	80	12	
CA60G*		7/8	-	-	-	24 (3)	21 (3)	26-1/2	48	75	97	12	

Notes: 1) Do not use heavy duty polypropylene drain pans on oil furnaces or other applications where outlet temperatures may exceed 290°F +/-5°F. Specify metal drain pans for these applications. 2) Metal drain pan. 3) Metal drain pan. Slab rotated 90°. Refrigerant and plumbing connections still exit in front. 4) Only metal drain pans are available for 13" and 16" wide 4 row coils.

DRAIN PAN TEMPERATURE TABLE

DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligations. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. CA Spec-2025-05