

High-Efficiency Washout, Bottom Outlet Urinal



Product Features

- Vitreous China
- 1/4 Stall washout
- GPF: 0.125 gpf/0.47 lpf (one pint) to 1.0 gpf/3.8 lpf
- 3/4" Top inlet spud
- 1-1/2" outlet for exposed trap connection
- Integral flushing rim
- Hanging bracket included
- Flush valve not included

Codes and Certifications



- IAPMO/cUPC
- ASME A112.19.2 / CSA B45.1
- Meets ADA guidelines
- EPA WaterSense Certified*

* WaterSense compliant when used with a 0.125 gpf or 0.5 gpf WaterSense compliant flushometer.



Available Colors: White (WH)


Model

PF1805PTWH

1/4 Stall, 3/4" Top Spud, Bottom
Outlet Urinal

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a lifetime limited warranty on the vitreous china and a 5-year limited warranty on the fittings. Visit ferguson.com/PROFLO-vitreous-china-warranty for detailed warranty information.

High-Efficiency Washout, Bottom Outlet Urinal

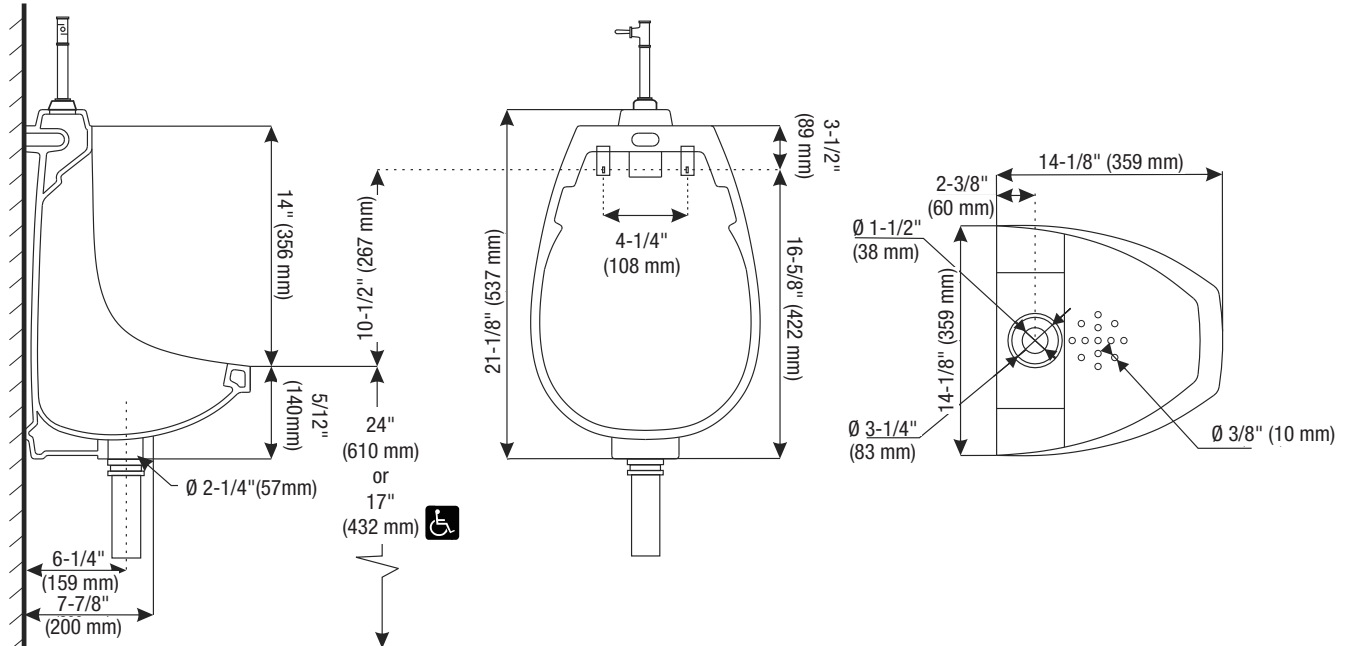

All dimensions and specifications are nominal and may vary: Dimensions of 8" and greater have a tolerance of +/-3%. Dimensions less than 8" have a tolerance of +/-5%.