




FL371 | FL372 LUNAR

- Powder Coated Cast Aluminum
- ETL Listed for Wet Locations (IP65)
- Ceiling or Wall Mount
- Mounting Hardware Included
- Enclosed & Gasketed

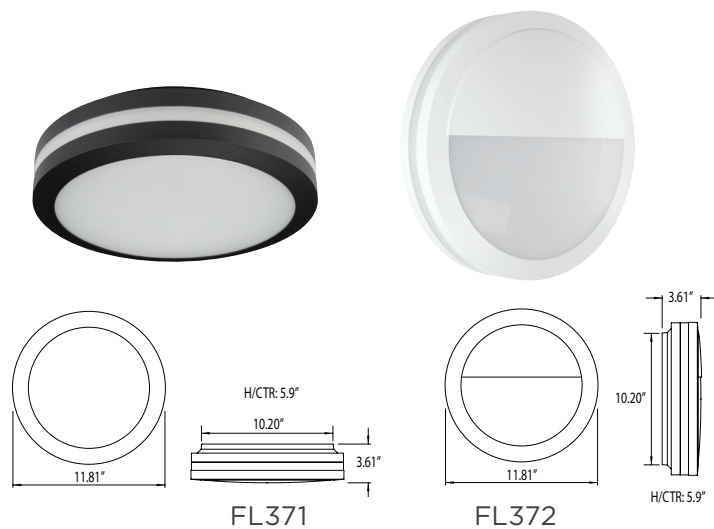

STYLE #	LIGHT SOURCE	BODY	DIFFUSER
FL371 FL372	DEDICATED 120V LED EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE1800 - 22W, 80 CRI >88 Lumens Per Watt** C-2130lm 4000K	B-Black W-White	POLYCARBONATE W-White

