MOEN®

Model Number	Faucet Holes	Depth- Inches	Drain Placement	ADA/FHA Compliant*
GS202864Q (pictured)	4	L: 5-1/2", R: 8"	Center	No
GS202861Q	1	L: 5-1/2", R: 6-1/2"	Center	No
GS202852BQ (obsolete)	2	L: 5-1/2", R: 6-1/2"	Rear	ADA/FHA
GS202853BQ (obsolete)	3	L: 5-1/2", R: 6-1/2"	Rear	ADA/FHA
GS202854BQ (obsolete)	4	L: 5-1/2", R: 6-1/2"	Rear	ADA/FHA

SINK DESCRIPTION

- 2000 Series single bowl drop-in sink
- 20 gauge stainless steel, matte bowl finish
- U-channel mounting system, hardware included
- QuickMount[™] installation included
- SoundSHIELD[™] sound absorbing system


WARRANTY

- Lifetime limited warranty to the original homeowner
- 10 year limited warranty when used in a Multi-family installation
- 5 year limited warranty when used in a Commercial installation
- Visit www.moen.com/customer-support/warranty for complete details and limitations

SINK DIMENSIONS

- Overall: 33" x 22"
- Left Bowl: 14" x 16"
- Right Bowl: 14" x 16"
- Drain Size: 3-5/8"
- Faucet Holes
- 1-1/2" (38mm) diameter
- 4" (102mm) center

Specifications




CUT OUT DIMENSIONS

 32-1/2" x 21-1/2" with 11/16" corner radius, tolerance of plus or minus 1/16" is acceptable


STANDARDS

- Third party certified to meet ASME A112.19.3/CSA B45.4 and all applicable specifications referenced therein
- *ADA/FHA Sink compliant to ADA (ICC A117.1) and FHA accessibility specifications when installed to these required standards. Always consult with your local building department for the specific installation requirements.
- *FHA Sink compliant to FHA accessibility specifications when installed to these required standards. Always consult with your local building department for the specific installation requirements.

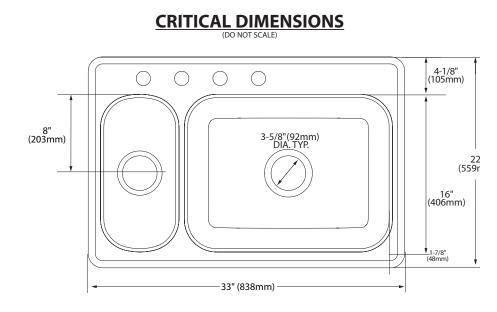

Faucet Hole Configurations

1-1/2" (38mm) diameter faucet holes 4" (102mm) Center 8" (203mm) centers for 4 hole sink



Installation Detail

