

**HEA** | HIGH EFFICIENCY  
**AIRLESS**™

**Makes it easier to paint like a pro.™**



**ControlMax™ Series**

**T TITAN®**




# Makes it easier to paint like a pro.™

New High Efficiency Airless™ technology takes the intimidation out of airless spraying with unmatched control and a forgiving fan pattern that delivers a more consistent finish.

- ▶ **UP TO 55% LESS OVERSPRAY<sup>1</sup>**
- ▶ Softer spray improves control for a more consistent finish
- ▶ Takes the intimidation out of airless spraying

Perfect for that contractor new to spraying or the semi-professional ready to take the next step. HEA systems can be used for a wide range of coating materials, including interior and exterior jobs, and can easily be transported from job site to job site.

- ▶ Lasts up to 3X longer than comparable airless sprayers
- ▶ Power to spray unthinned coatings
- ▶ Replaceable fluid section maximizes sprayer life
- ▶ **2-YEAR LIMITED WARRANTY**

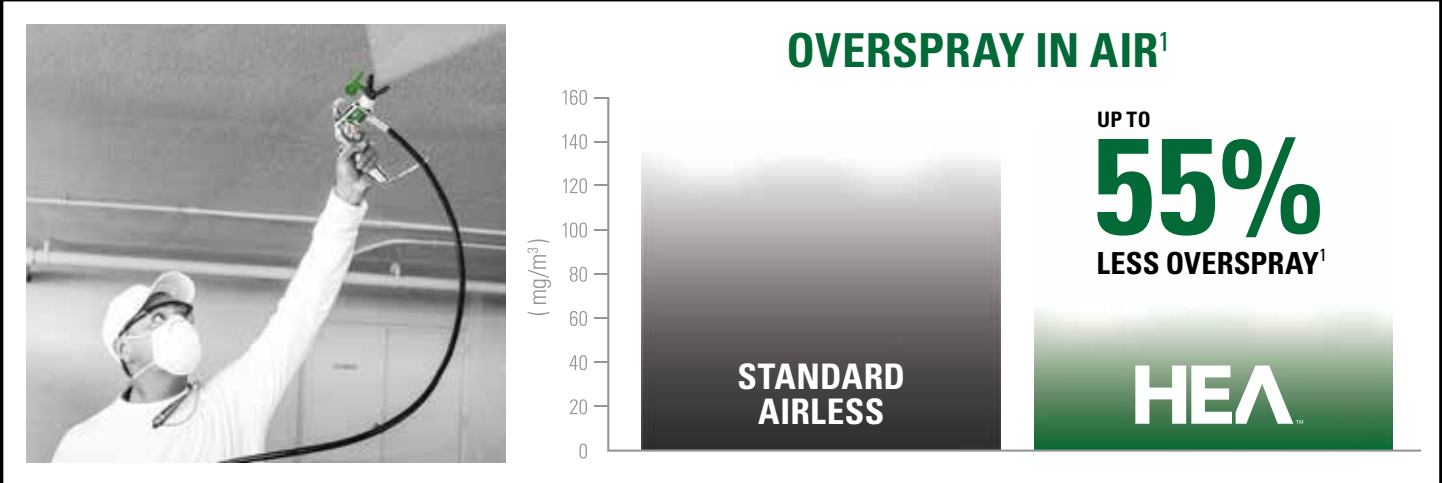

<sup>1</sup> Testing performed using a popular interior latex paint vs. competitive high pressure airless system.

# ControlMax™ 1700

AIRLESS PAINT SPRAYER



<sup>2</sup> Wrench and extra tips not included.

Telescoping handle on cart models only.

# HEA | HIGH EFFICIENCY AIRLESS™

Makes it easier to paint like a pro.™

UP TO  
**55%**  
LESS OVERSPRAY<sup>1</sup>



## ControlMax™ 1500

INCLUDES:  
ControlMax spray gun  
and 25-foot hose

## ControlMax™ 1700

INCLUDES:  
ControlMax Pro spray gun  
and 30-foot hose

## ControlMax™ 1700 Pro

INCLUDES:  
ControlMax Pro spray gun  
and 50-foot hose

## ControlMax™ 1900 Pro

INCLUDES:  
ControlMax Pro spray gun  
and 50-foot hose

Use only with Titan ControlMax HEA™ accessories. May not be compatible with other airless spraying accessories. Check owner's manual or call Titan Technical Service (866-848-2698) for details.

## A NEW WAY TO PAINT.

	1500	1700	1700 Pro	1900 Pro
<b>SPECIFICATIONS</b>				
Motor	0.50 Horsepower	0.60 Horsepower	0.60 Horsepower	0.70 Horsepower
Flow Rate (Gallons per Minute)	0.29 (1.10 LPM)	0.33 (1.25 LPM)	0.33 (1.25 LPM)	0.40 (1.50 LPM)
Maximum Tip Size	0.015"	0.017"	0.017"	0.019"
Maximum Operating Pressure	1500 PSI (10.3 MPa)	1500 PSI (10.3 MPa)	1500 PSI (10.3 MPa)	1600 PSI (11.1 MPa)
Maximum Hose Length	75-feet (22.9 m)	80-feet (24.4 m)	100-feet (30.5 m)	100-feet (30.5 m)
Weight	12.4 lbs. (5.60 kg)	13.5 lbs. (6.1 kg)	24.2 lbs. (11.0 kg)	24.2 lbs. (11.0 kg)
Recommended Usage per Year	175 Gallons	300 Gallons	300 Gallons	500 Gallons
<b>CONFIGURATIONS</b>				
	<b>PART NO.</b>	<b>PART NO.</b>	<b>PART NO.</b>	<b>PART NO.</b>
Skid	0580005	0580009	----	----
Cart	----	----	0580006	0580008

All information contained in this brochure is based on the latest information available at the time of printing. Titan Tool reserves the right to make changes at any time, without notice. Due to continuous innovation, specifications may progressively change. Contact one of our dependable sales reps or call our dedicated customer service team for more information.