

# WALL-MOUNT SHOWER SET

SKU: 926360

## BEFORE YOU BEGIN

We recommend consulting a professional if you are unfamiliar with installing plumbing fixtures. Signature Hardware accepts no liability for any damage to the wall, plumbing, shower, or for personal injury during installation.


Observe all local plumbing and building codes.

Unpack and inspect the product for shipping damage. If any damage is found, contact our Customer Relations team at 1-866-855-2284.

## GETTING STARTED

- Ensure that you have gathered all the required materials that are needed for the installation.

## TOOLS AND MATERIALS:



Adjustable Wrench



Flathead Screwdriver



Phillips Screwdriver



Safety Glasses



Keyhole Saw




Tape Measure



Thermometer



Strap Wrench



Silicone Sealant  
(100% Neutral Cure)




Painter's Tape



Pliers



Hex Wrench



Long-nose Pliers



Thread Sealant



Pencil



Drill

REVISED 03/17/2020

CODES: 244336, 459347, 497555, 514910, 514914  
244335, 392535, 459348, 497556, 508317, 114321  
244337, 459349, 497557, 514911, 231894, 231892  
231895, 231890, 231888, 231891

For Warranty information, please visit: [signaturehardware.com/services/warranty](https://signaturehardware.com/services/warranty)


# WALL-MOUNT SHOWER SET

SKU: 926360


If you are replacing your plumbing valve, please review the common plumbing methods illustrated below (Copper, IPS). Remove the existing handle and valve trim before replacing your valve. Please follow all local building and plumbing codes.

Use a wire fitting brush to thoroughly clean the brass inlets before soldering copper to the valve. Do not use push-fit fittings for tub spout outlet. Do not use PEX for tub spout outlet.

## IPS

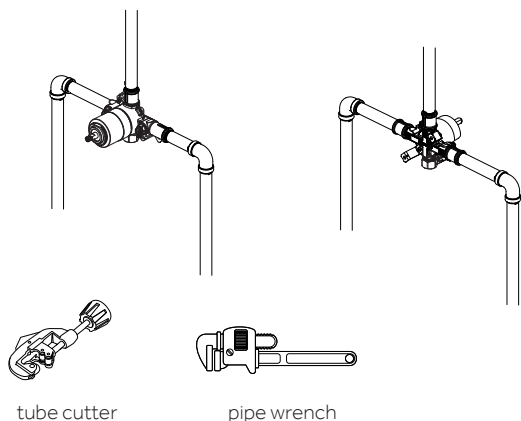

## Copper (Soldering)

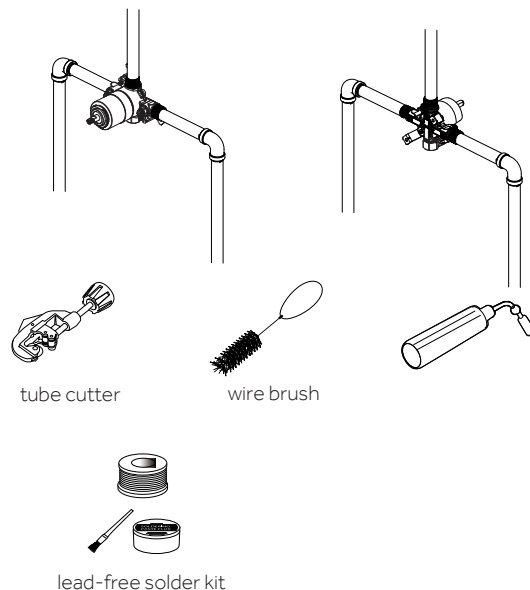

**Note:** Before soldering, remove the cartridge, stop valves and diverter cartridges.

# WALL-MOUNT SHOWER SET

SKU: 926360

## PRESSURE BALANCE VALVE INSTALLATION


1. Shut off the water supply.

2. Verify that the hole sizes and position of the holes in the wall are correct. The shower outlet hole should be 1-1/4" diameter. The recommended valve depth to the finished wall is 1-1/2". Ensure that the valve body cover is flush with the finished exterior surface of the wall. Position the valve body correctly in the wall with the side marked "UP" pointed upward.


3a. **Thin Wall Installation:** Are usually built up with materials such as fiberglass tub surrounds and will be the main source of support for the valve. The plaster guard (1) remains attached to the valve.

3b. **Thick Wall Installation:** Are usually built up with materials such as cement board, drywall, tile, etc. The plaster guard (1) is positioned so that it is flush with the finished wall. This ensures that the valve will be at the correct position to accept the trim. The depth for the valve body (2) in wall is measured from the center of the shower outlet to the finished wall surface. The accepted depth distance is 1-1/2"


### Thin Wall Installation



### Thick Wall Installation

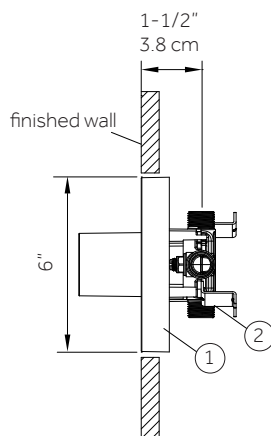


4. Remove the plaster guard (1) from the body (2).

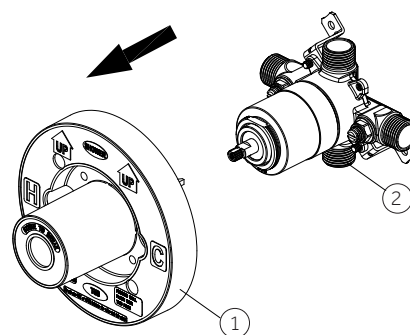

5. Fasten the body assembly (1) to cross brace with mounting screws (2).

**Note:** Be sure to position the body (1) correctly in the wall, with the side marked "UP" facing upward.

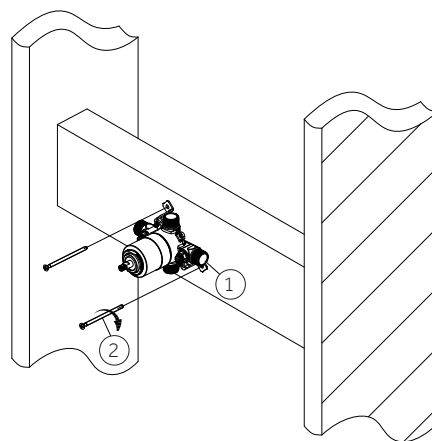


# WALL-MOUNT SHOWER SET

SKU: 926360


6. Wrap plumbers tape around the pipe threads in a clockwise direction. Connect the hot and cold water supply lines (1) and the shower outlet pipe (2) by threading them into the valve body (4) in a clockwise direction. Then insert the plug (5) into the bottom of the valve body (4). Tighten the pipes to the valve body (4) with a pipe wrench. Connect the pipe elbows (3) to the end of the shower outlet.

**Notes:** The hot water supply lines go into the "H" inlet, and the cold water supply lines go into the "C" inlet.

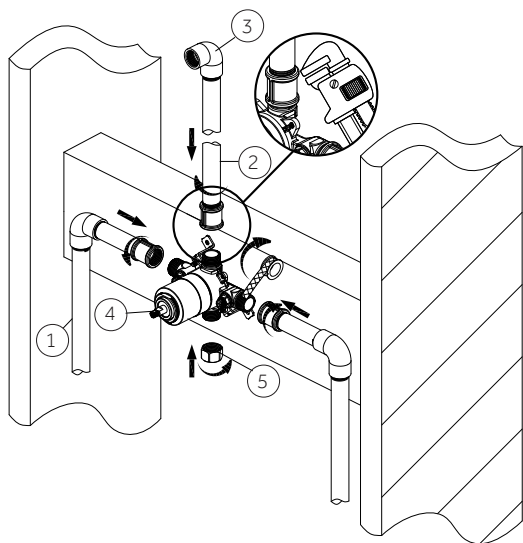

7. If the hot and cold inlets are reversed (hot on right and cold on left), remove bonnet (1) from the valve body (3) with reversed supply connections. Rotate the cartridge (2) 180°, so H appears on the right. Install the cartridge making sure the key is fully engaged with the slot in the valve body (3). Slide the bonnet (1) over the cartridge (2) and thread them onto the valve body (3). Hand tighten securely.


**Note:** Do not install the valve body (3) upside down.

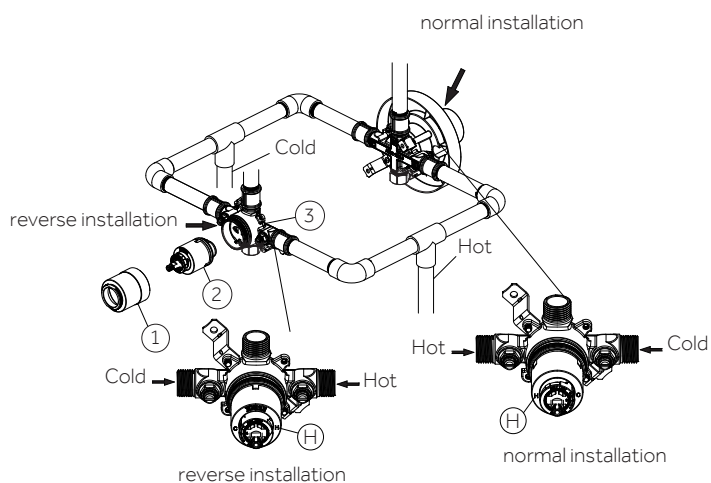


# WALL-MOUNT SHOWER SET

SKU: 926360

8. Use 1/2" iron pipe plugs to seal shower outlet. Turn cartridge stem counterclockwise to full on mixed position. Turn on hot and cold water lines to full open position for one minute each. Check for leaks. Shut off water at faucet. Slowly remove pipe plug from shower outlet to relieve pressure.

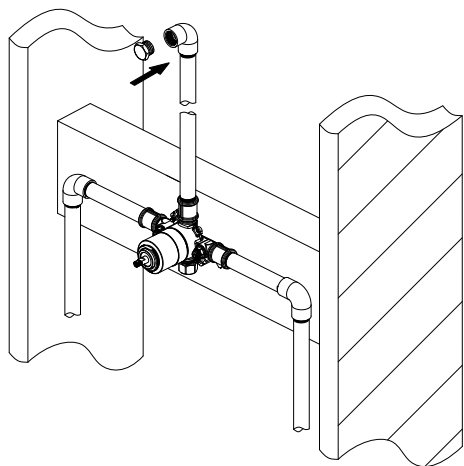


9. Turn on water allowing water to flow from shower outlet until all foreign matter has cleared the line. Shut off water at faucet.




10. Place the plaster guard (1) onto the valve body (2).

**Note:** Be sure to position the plaster guard (1) correctly onto the valve body (2), with the side marked "SHOWER" facing upwards.



11. Before adjusting the temperature, remove the plastic cap (1) from the valve body (2) by twisting the cap in a clockwise direction.

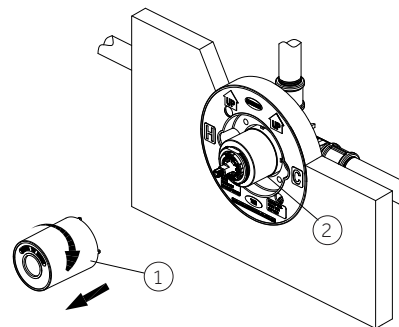


# WALL-MOUNT SHOWER SET


SKU: 926360

12. Rotate the lever counterclockwise until the water is to the maximum desired temperature, not to exceed 120 degrees F/49 degrees C. Seasonal maintenance of the maximum outlet temperature may be required due to changes in groundwater temperature.

**Note:** Turn lever to the off position once temperature is set.

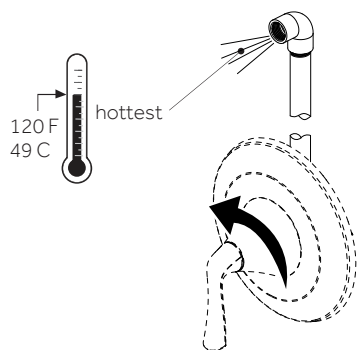


13. Removing the limit stop ring, remember the position of the limit stop ring (1) on the cartridge assembly (2). Remove the limit stop ring (1) from the cartridge assembly (2).

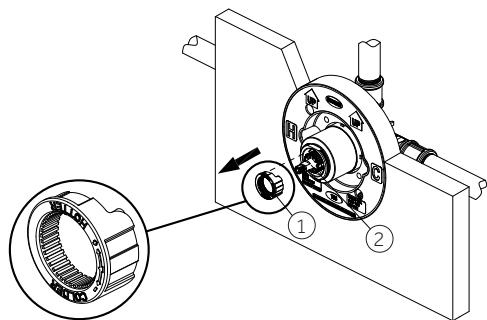


14. For colder water, adjust the limit stop ring (1) in a clockwise direction and reinstall the limit stop ring (1) onto the cartridge assembly (2). For hotter water, adjust the limit stop ring (1) in a counterclockwise direction and reinstall the limit stop ring (1) onto the cartridge assembly (2).

**Note:** A thermometer can be held in the running water to aid in reaching the desired water temperature.

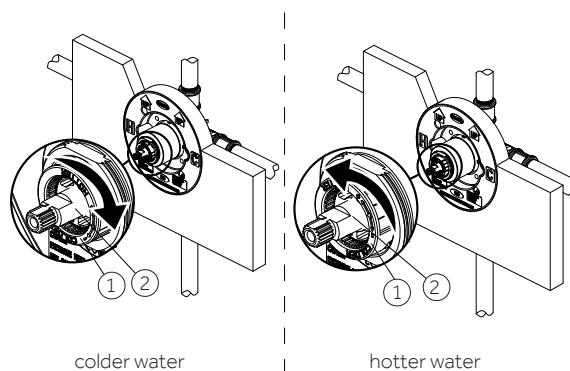

15. If faucet leaks from spout, shut off the water supplies and replace the cartridge (1).

**Note:** Install cartridge (1) correctly for proper handle rotation.

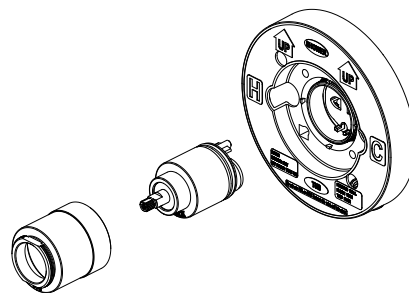

# WALL-MOUNT SHOWER SET


SKU: 926360

## OUTLET CONNECTIONS


1. There are 3 outlets on the diverter valve, providing 3 separate connections. Each outlet will connect one end fixture, for example, showerhead, hand shower and the tub spout.
2. The outlet sequence will start from the top, the right and then the left.
3. After outlets have been installed turn on the water supply to the diverter valve and check for leaks. Then turn the water off again.

## TRIM INSTALLATION

1. Secure parts as shown below.

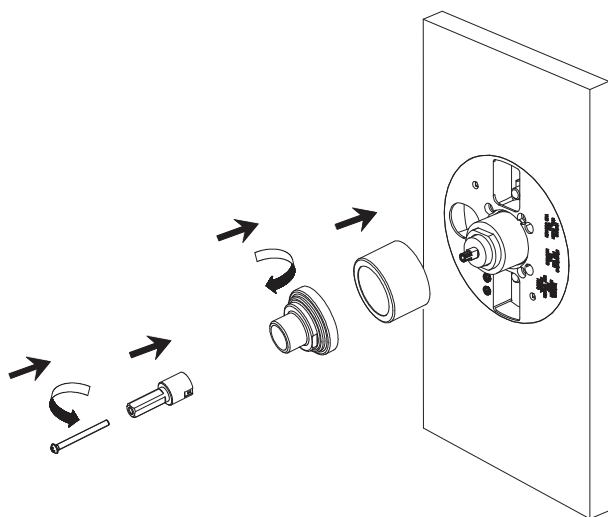


2. Install escutcheon and handle onto valve, as referenced in below installation.

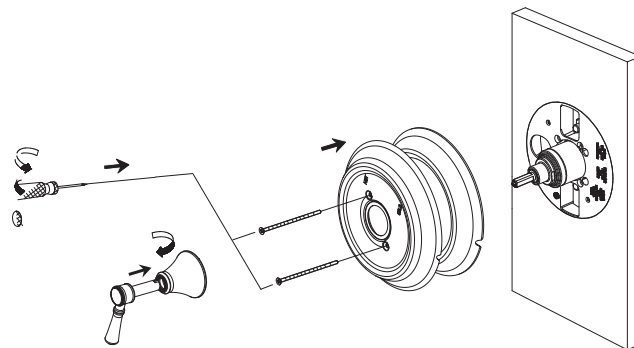

## COMPONENT INSTALLATION


1. Apply plumbers tape to the threads of the shower arm.




# WALL-MOUNT SHOWER SET

SKU: 926360


2. Install the shower arm using a strap wrench.

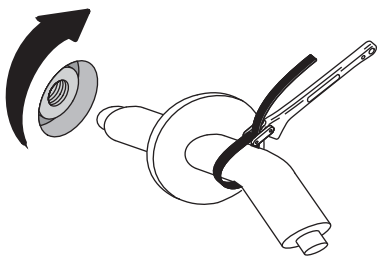


3. Install the escutcheon.



4. Run water to flush out any debris.



5. Install shower head on shower arm. Thread the ball onto the shower arm clockwise.

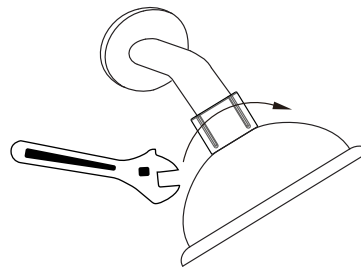

## CARE INSTRUCTIONS

To preserve the finish of your product, apply non-abrasive wax. Any cleaners should be rinsed off immediately. Do not use abrasive cleaners on the product.




# WALL-MOUNT SHOWER SET

SKU: 926360

## REMOVAL OF CARTRIDGE FOR MAINTENANCE


1. Remove the face plate, handle, and housing.

2. Release the top cover with wrench in counterclockwise direction

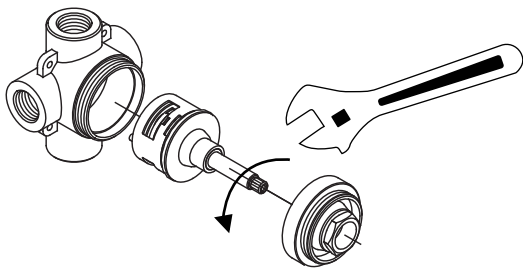

3. Grasp the cartridge stem and pull out the cartridge, making note of correct position for seal.

4. Place the cartridge into the transfer valve body and ensure the seals are in the correct position.



5. Position the pins correctly and match the body position holes to fit in securely.

6. Reassemble the top cover to the transfer valve by turning it clockwise until hand tight. Then turn additional 1/2 turn with a wrench.

**Note:** Make sure the handle stem is positioned correctly.