


WRAP™ CUSTOM



MAD8530** Ceiling Fan

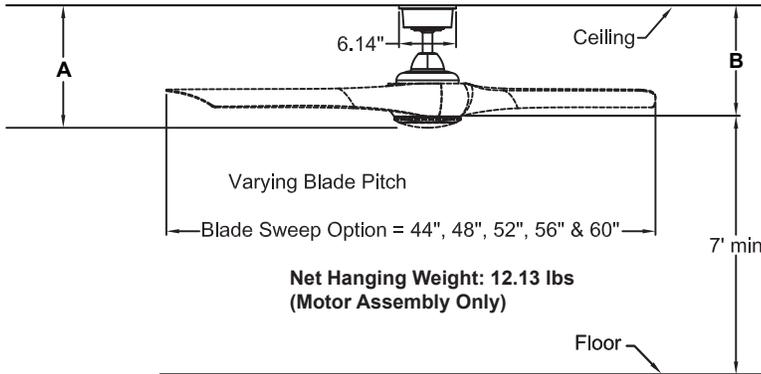

| Available Finishes | |
|--------------------|--------------|
| BN | Brush Nickel |
| BL | Black |
| GR | Matte Greige |
| MW | Matte White |
| DZ | Bark Bronze |

| | A | B |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 12.46" | 11.83" |
| Fan w/12" downrod | 19.96" | 19.33" |
| Fan w/18" downrod | 25.96" | 25.33" |
| Fan w/24" downrod | 31.96" | 31.33" |
| Fan w/36" downrod | 43.96" | 43.33" |
| Fan w/48" downrod | 55.96" | 55.33" |
| Fan w/60" downrod | 67.96" | 67.33" |
| Fan w/72" downrod | 79.96" | 79.33" |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

BLADES:

3 bladed blade sets are available in plastic materials— all sold separately.

See our catalog or visit www.fanimation.com for blade options.

CONTROL OPTIONS:

TR205D hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control, WFR8530 receiver are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

LK8530- One 18-watt dimmable LED.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod (DR1-4.5). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

| Energy Guide FTC Measured with BPW8530-60 Blades in 60" sweep | | | |
|--|---|--------------------------------------|--------------------------------------|
| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
| 24 | 5114 | 7 | 211 |