



CASWELL™ SINGLE LEVER FLOOR MOUNT TUB FILLER

Modern Caswell™

CA2239L

FEATURES


- Exposed mixer
- Floor mounted single column
- Side mounted metal lever handle
- Diverter to handshower
- Ceramic disc cartridge
- Single-function handshower with easy cleaning face
- Solid brass construction
- 8 15/16" spout reach
- Rough must be recessed under the finished floor.
- Remote thermostatic valve may be needed. Check local code requirements.

COLORS/FINISHES

- Polished Chrome
- Polished Nickel
- Satin Nickel

WARRANTY


- Limited Lifetime

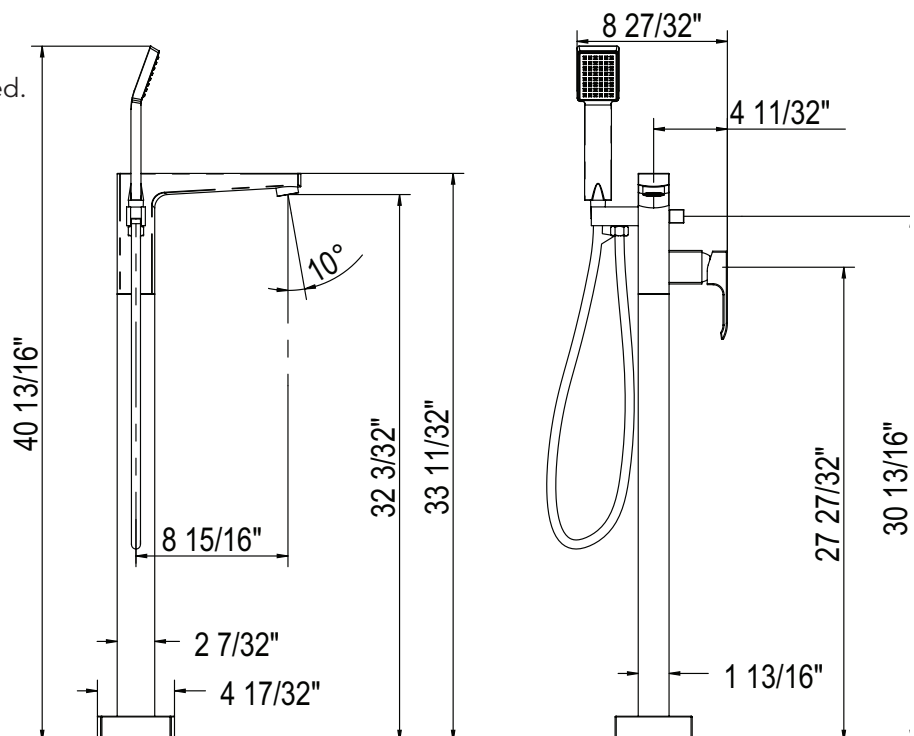

INSTALLATION INSTRUCTIONS

ROHL CASWELL FREE STANDING TUB FILLER CA2237LAPC, CA2239LPN, CA2239LSTN

INSTALLATION INSTRUCTIONS

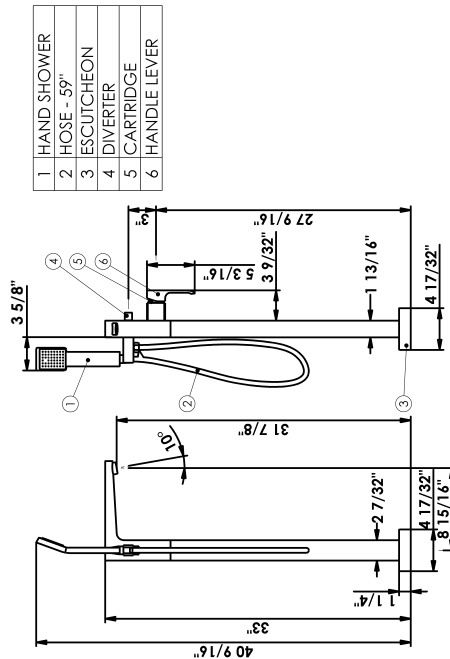

Please leave instructions with the home owner once installed.

SYSTEM REQUIREMENTS

To ensure the optimum performance and customer satisfaction, please adhere to the following:

Flush out all pipe work prior to installation.

Maximum operating pressure

75psi

NOTE: Pressures over 75psi will require that the house have a pressure regulator installed

to limit the pressure below 75psi.

Maximum hot water temperature

145°F

If the water temperature exceeds 145°F an approved tempering valve must be fitted.

Maximum flow rate: 8.2 US gallons/minute at 60psi flow pressure.

Hand shower flow rate is 2gpm.

Please follow local code guidelines for Asse 1016.

#12345 01/14

Care and Maintenance: After use, wipe down with a soft, dry cloth. For all chrome plated surfaces clean this product with warm soapy water and then dry with a dry soft cloth.

Nickel plated, satin and Inca brass finishes should be cleaned with a soft cloth and warm water. Then dry with a dry soft cloth.


Do not use cream cleaners or cleaning agents containing a corrosive acid or scouring agent including: Softscrub, Comet, Ajax and Bonami, as these may damage the surface of the faucet.

Do not use any spray cleaners with ammonia or alcohol like Windex, 409 or Fantastik.

Any use of unsuitable cleaning agents causing damage to the surface will not be covered by the warranty.

WARRANTY: Warranty is limited lifetime. See ROHL website for details. (www.rohlhome.com) A basic in-line filter system is required for the house to protect any debris from entering the water supply line to the house (i.e. due to construction or service work on the street water main).


INSTALLATION INSTRUCTIONS

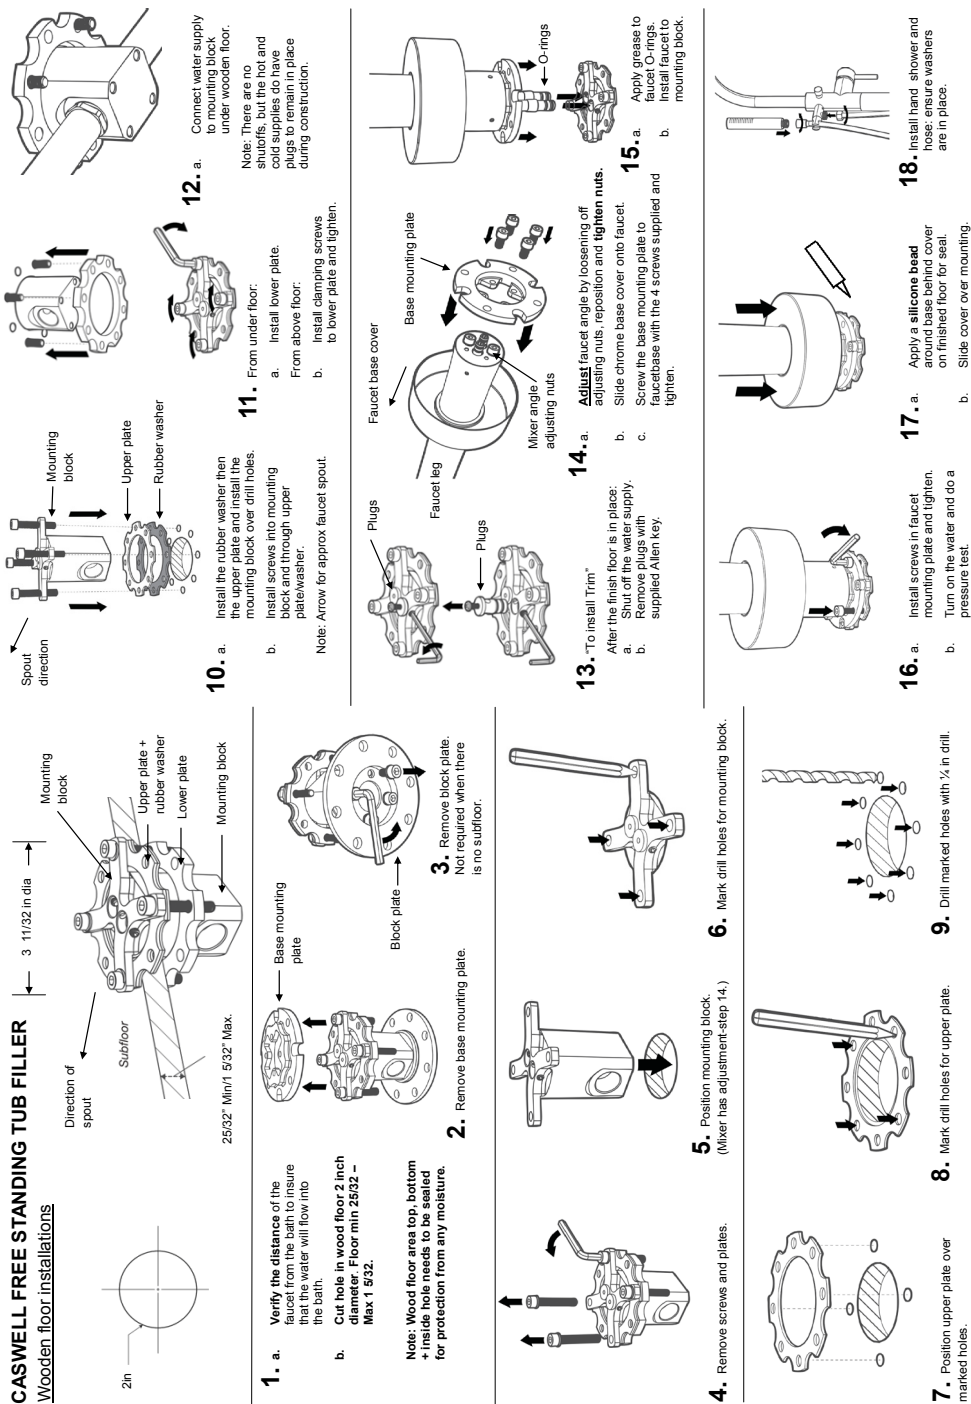


INSTALLATION INSTRUCTIONS

CASWELL FREE STANDING TUB FILLER

Concrete subfloor installations




1. Minimum requirements:
4 inches - Floor cut-out.
3 inches - Base of mounting block to the finished floor.
¾ inch - Concrete subfloor.
Note: Mounting block screws not supplied.
2. a. Verify the distance of the faucet from the bath to insure that the water will flow into the bath.
b. Remove base mounting plate.
c. Install mounting block to concrete subfloor. (Floor anchors not supplied.)
d. Verify subfloor is level.

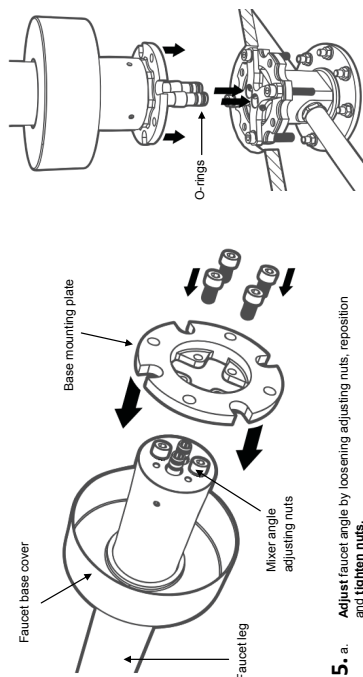


5. a. Adjust faucet angle by loosening adjusting nuts, reposition and tighten nuts.
b. Slide the chrome base cover onto faucet.
c. Screw the base mounting plate to faucet base with the 4 screws supplied and tighten.


6. a. Apply grease to faucet o-rings.
b. Install faucet to mounting block.



3. a. Connect water supply to mounting block on the sub floor.
b. Check for leaks.
c. Confirm the finish floor height.
Note: There are no shutoffs, but the hot and cold supplies do have plugs to remain in place during construction.



4. Note: When laying the finish floor, do not cover mounting bolts above and below the rough.
a. "To install the trim": After the finish floor is in place: Shut off the water supply.
b. Remove plugs with Allen key.

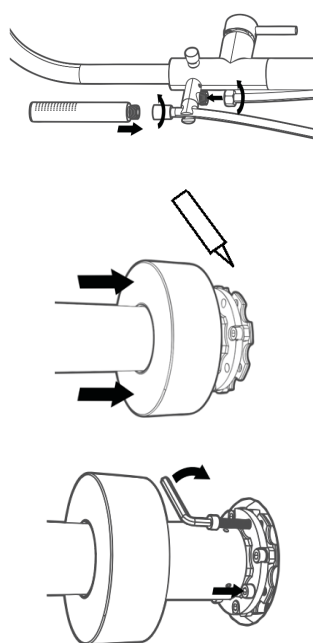

7. a. With screws supplied tighten mounting plate.
b. Turn on the water and do a pressure test.
8. a. Apply a silicone bead around base behind cover on finished floor for seal.
b. Slide cover over mounting.
9. Install hand shower and hose. Ensure washers are in place.