

SPECIFICATIONS

FIGURE IS4CTHP - IS6CTHP
STAINLESS STEEL FITTINGS



304 & 316 STAINLESS STEEL THREADED HEX HEAD PLUG


PRODUCT SPECIFICATIONS

Standards

- The material composition and quality requirements shall comply with ASTM A351/A351M
- Threads should be in accordance with ASME B1.20.1-1983

REFERENCE CHART

Item #	Size (in.)	A	B	SW	Squares	Grade
IS4CTHPA	1/8	0.709	0.472	0.551	6	304
IS4CTHPB	1/4	0.906	0.650	0.669	6	
IS4CTHPC	3/8	0.945	0.689	0.827	6	
IS4CTHPD	1/2	1.063	0.768	1.024	6	
IS4CTHPF	3/4	1.102	0.807	1.260	6	
IS4CTHPG	1	1.339	1.004	1.496	6	
IS4CTHPH	1-1/4	1.398	1.004	1.811	6	
IS4CTHPJ	1-1/2	1.437	1.004	2.047	6	
IS4CTHPK	2	1.457	1.004	2.559	6	
IS4CTHPL	2-1/2	1.909	1.431	3.169	8	
IS4CTHPM	3	1.988	1.476	3.760	8	
IS4CTHPP	4	2.028	1.457	4.764	8	
IS6CTHPA	1/8	0.709	0.472	0.551	6	316
IS6CTHPB	1/4	0.906	0.650	0.669	6	
IS6CTHPC	3/8	0.945	0.689	0.827	6	
IS6CTHPD	1/2	1.063	0.768	1.024	6	
IS6CTHPF	3/4	1.102	0.807	1.260	6	
IS6CTHPG	1	1.339	1.004	1.496	6	
IS6CTHPH	1-1/4	1.398	1.004	1.811	6	
IS6CTHPJ	1-1/2	1.437	1.004	2.047	6	
IS6CTHPK	2	1.457	1.004	2.559	6	
IS6CTHPL	2-1/2	1.909	1.431	3.169	8	
IS6CTHPM	3	1.988	1.476	3.760	8	

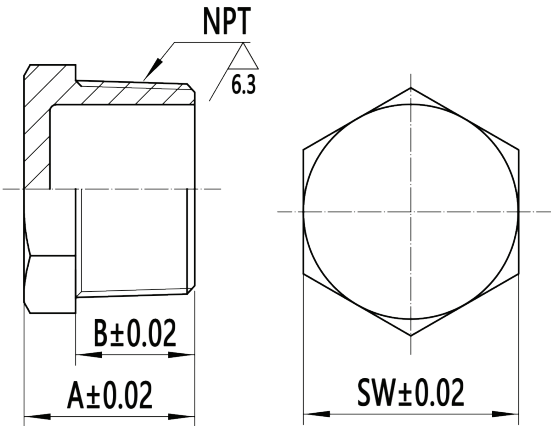

TOLERANCE—L:±0.02