

MNO17140U

THANK YOU FOR CHOOSING MISENO

Thank you for selecting Miseno. We appreciate your commitment to Miseno quality. To ensure that your installation proceeds smoothly, please read these instructions before you begin.

CAREFULLY UNPACK AND EXAMINE ALL PACKAGE CONTENTS BEFORE STARTING

If you encounter any installation or performance problems, please don't hesitate to contact us at (855) 480-2915 or email us at infoservice@miseno.com.

Thanks again for choosing Miseno, where style comes home.

ALL INSTALLATION PROCEDURES MUST COMPLY IN STRICT ACCORDANCE WITH APPLICABLE LOCAL PLUMBING AND BUILDING CODES.

BEFORE YOU BEGIN**⚠ CAUTION****Risk of personal injury or product damage**

Handle with care. Product can break, chip or cause injury if handled carelessly. Get help lifting the lavatory.


- Observe all local plumbing and building codes.
- Prior to installation, unpack the new lavatory and inspect for damage. Return the lavatory to its protective carton until you are ready to install it.
- Inspect the existing drain and supply tubing. Replace if necessary.
- Do not substitute another sealant if one is supplied with this lavatory.
- Use the template supplied with the lavatory.
- Refer to the roughing in information to ensure proper installation for ADA applications.
- Use these instructions for both undercounter and tile-in installations. Follow only the instructions that apply to your installation.
- Failure to follow these precautions may result in a poor installation.
- The walls and floor must be square, plumb, and level.
- Miseno reserves the right to make revisions in the design of products without notice.

FOR UNDERCOUNTER INSTALLATIONS


- Undercounter lavatories should be installed only by experienced installers.
- Do not use adhesives or adhesive sealants with this product.
- Install so future removal from underneath the countertop is possible. This will avoid countertop damage.

FOR UNDERCOUNTER ADA INSTALLATIONS

- For ADA installation, please follow recommended rough-in dimension below.
- The sink overflow should be located at the rear side of the sink.

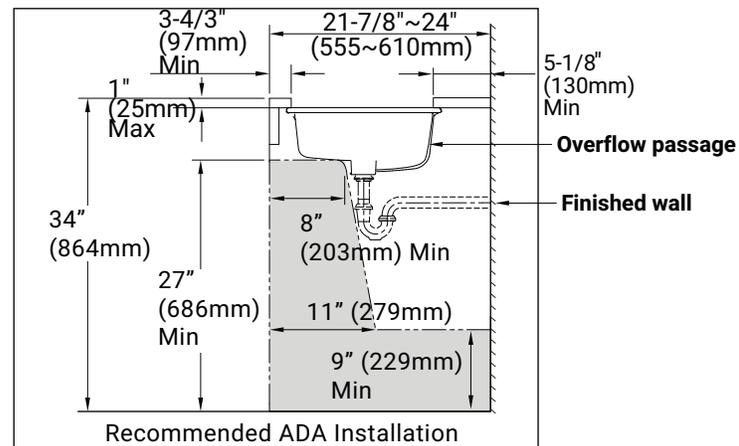

TOOLS AND MATERIALS

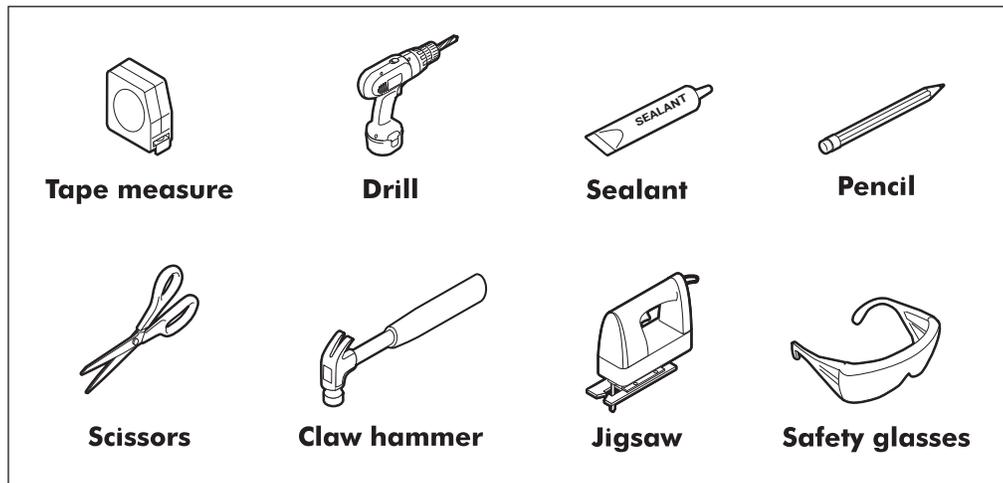

PREPARATION

UNDERCOUNTER INSTALLATIONS

- Install the water supplies and drain piping according to the roughing-in information.

NOTE: You may require different, more specialized tools to install this lavatory to countertop materials other than wood or wood composites.

NOTE: Install so future removal from underneath the countertop is possible to avoid countertop damage.

- Check the desired lavatory location for clearance between the backsplash, faucet and lavatory.
- Verify cabinet clearance beneath the countertop.
- Cut out the template where indicated for countertop opening. Cut along the inside of the cutting line.
- Position and trace around the template on the countertop with a pencil.
- Mark the faucet hole centerline on the countertop.

TILE-IN INSTALLATIONS

- Install the water supplies and drain piping according to the roughing-in information.

NOTE: Tile backer board installed over plywood is the recommended underlayment for installing this lavatory. Tile should be bonded to the backer board with dry set or latex Portland mortar. Acceptable underlayments include:

- Tile backer board over 3/4" (2 cm) exterior grade plywood
- 3/4" (2 cm) exterior grade plywood


IMPORTANT! Do not use:

- Flakeboard
- Interior grade plywood
- Gypsum wallboard

NOTE: Consult with the tile contractor to determine the material to be used. Check the desired lavatory location for clearance between the backsplash, faucet, lavatory, and cabinet. Verify cabinet clearance beneath the countertop. Cut out the template where indicated for countertop opening. Cut along the inside of the cutting line. Position and trace around the template on the countertop with a pencil.

- Route or shim as required to level tile.

UNDERCOUNTER INSTALLATION

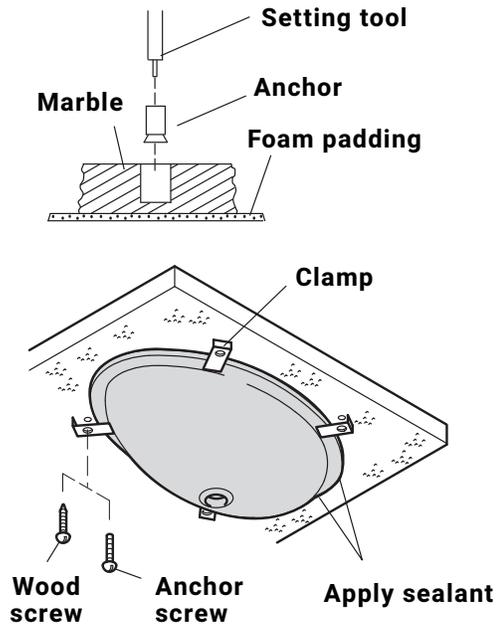

- Cut out the opening by carefully following the pencil line traced from the template.

NOTE: The screws and anchors provided should be used on countertops with a minimum 1" (2.5 cm) thickness. For thinner countertops, use appropriate anchors and fasteners (not provided).

For Wood Countertops

- Mark and pre-drill the wood screw holes at the locations shown on the template.
- Waterproof any exposed areas of wood.

For Marble/Stone Countertops

- Position the countertop upside down on foam padding to protect the surface. Mark and drill 3/8" holes 5/8" (1.6 cm) deep at the locations shown on the template.
- Use a setting tool and hammer to secure the anchors.

For All Undercounter Installations

- If the countertop has not been installed, install it at this time.
- Drill the faucet holes according to the faucet installation instructions.

- Install the faucet to the countertop according to the faucet manufacturer's instructions.
- Install the drain to the lavatory according to the drain manufacturer's instructions.

NOTE: Do not use adhesives or adhesive sealants.

- Apply a continuous bead of quality sealant to the top surface of the lavatory rim where it will contact the countertop.

! CAUTION**Risk of personal injury or product damage**


Handle with care. Product can break, chip or cause injury if handled carelessly. Get help lifting the lavatory.

- For marble countertops, install the lavatory to the countertop with the clamps and screws provided. For other countertop materials, refer to the countertop manufacturer's instructions for recommended fasteners.
- Position the lavatory squarely under the cutout before tightening the clamps. Draw the lavatory rim up against the countertop until it is snug. Do not overtighten.
- Immediately wipe away any excess sealant and fill any voids as needed.
- Allow the sealant to set for 30 minutes before proceeding.
- Connect and tighten the trap to the drain, and complete the water supply connections to the faucet according to the instructions packed with the faucet.
- Run water into the lavatory and check for leaks.
- Clean up with a non-abrasive cleaner.

TILE-IN INSTALLATION

FOR TILE-IN INSTALLATIONS

- Due to the variety of installations possible with this lavatory, you may need to use procedures other than those described. Remember, because of the variety of tile available, you must take careful measurements prior to installation.
- It is very important that the proper materials are used with your lavatory. Proper selection of tile is critical for a good installation. 3/8" (1 cm) tile is recommended. Because of the variance in tile thickness, your carpenter, tiler, and plumber must all be aware of the exact type of tile you choose.
- After selecting the tile, provide a sample to each contractor involved in the project. It is very important that the carpenter, tiler, and plumber maintain good communication and discuss requirements.

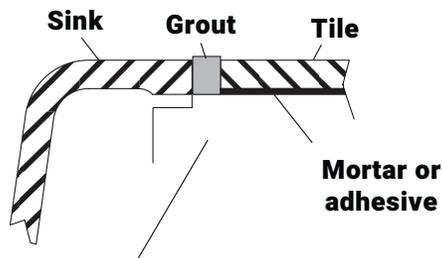

Water resistant underlayment or backing material - 3/4" minimum

- Cut out the opening by carefully following the pencil line traced from the template.
- Drill the faucet holes according to the faucet installation instructions.
- Measure and compare the thickness of the lavatory rim and tile. The lavatory rim thickness is 3/8" (1 cm) plus or minus 1/32" (1 mm). Because of the varying thickness of the tile and lavatory, or if adhesive or mortar bed installation is used, make allowances to shim the lavatory, or route the underlayment as required.

NOTE: The lavatory is designed to be installed flush or slightly lower than the surrounding tile. Provide shims, or route the underlayment, as needed.

- Position the lavatory in the countertop opening. Verify the fit and position.
- Carefully remove the lavatory.
- Install the drain to the lavatory according to the drain manufacturer's instructions.
- Place a 1" (2.5 cm) spot of sealant at each corner of the frame where it will contact the lavatory.

⚠ CAUTION

Risk of personal injury or product damage.

Handle with care. Product can break, chip or cause injury if handled carelessly. Get help lifting the lavatory.

NOTE: Apply additional sealant if using shims.

- Carefully re-position the lavatory. Press down firmly.
- Tile and grout to allow an acceptable space between the tile and lavatory.
- Use sealant in the space between the lavatory and tile.
- Install the faucet to the countertop according to the faucet manufacturer's instructions.
- Connect and tighten the trap to the drain, and complete the water supply connections to the faucet according to the instructions packed with the faucet.
- Run water into the lavatory and check for leaks.
- Clean up with a non-abrasive cleaner.

CARE AND CLEANING

- To keep your lavatory looking new, make sure you rinse it out thoroughly after each use.

CAUTION

Risk of product damage
DO NOT use strong abrasive cleaners, as they will scratch and dull the surface.

- Stubborn stains, paint, or tar can be removed with turpentine or paint thinner.

LIMITED LIFETIME WARRANTY

WHAT IS COVERED?

Build.com, Inc. or the "Company" warrants its products to be free from defects in material and workmanship under normal use and service FOR THE LIFETIME OF THE PRODUCT while in possession of the original purchaser. This warranty is not transferable.

WHAT IS NOT COVERED?

The warranty set forth in paragraph 1 does not cover installation or any other labor charges and does not apply to products which have been damaged as a result of any accident, abuse, improper installation or maintenance, or modification of original plumbing product. The warranty of such products is limited to the warranty extended to Build.com, Inc. by the product manufacturer. Finally, Build.com, Inc. SHALL NOT BE RESPONSIBLE OR LIABLE FOR ANY FAILURE OR DAMAGE TO THIS PRODUCT OR ANY COMPONENT THERE OF CAUSED BY THE USE OF ABRASIVE CLEANERS.

HOW TO OBTAIN WARRANTY SERVICE

US and Canadian Customers:
The purchaser should contact Build.com, installing contractor or builder from whom the product was purchased.

LIMITATIONS OF IMPLIED WARRANTY AND DISCLAIMER OF CONSEQUENTIAL OR INCIDENTAL DAMAGES
Build.com, Inc. DISCLAIMS ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES AND DISCLAIMS ALL EXPRESS OR IMPLIED WARRANTIES, INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.
IMPLIED WARRANTIES OF THE PRODUCTS AND PRODUCT COMPONENTS ARE LIMITED TO THE DURATION OF THE RESPECTIVE WARRANTY.

Some states do not allow the exclusion or limitation of incidental or consequential damages or limitations on how long an implied warranty lasts, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights, which vary from state to state.

Miseno is a registered trademark of Build.com, Inc.