



LED Compact Thermoplastic Exit Sign

Product Specifications



Take building safety to the next level with the versatile LED Compact Thermoplastic Exit Sign from TCP. Made of durable thermoplastic ABS, this double-sided exit sign is available in red or green and can be mounted from ceilings or walls. Select models feature a powerful battery backup system that keeps the exit sign illuminated for at least 90 minutes after power is lost.

Reasons to choose the LED Compact Thermoplastic Exit Sign from TCP

- Long-lasting, ultra-bright red or green LED's and easily visible 6" lettering
- Easily accessible test switch and charge rate indicator
- Double-sided for top, end, or side mounting
- Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and to meet safety codes
- In battery back-up models, transfer switch automatically connects to internal battery for minimum 90-minute emergency illumination
- Battery back-up models feature 4.8V long life, rechargeable NiCd battery
- ETL listed for damp locations

Ideal Applications

- Retail
- Industrial
- Schools
- Hospitals



Specifications

Input Frequency.....	Dual 120/277V
Wattage.....	2.0W
Battery	4.8V NiCd
Min Start Temp	50°F (10°C)
Max Oper Temp.....	104°F (40°C)
Listings.....	ETL Listed for Damp Locations, UL 94V-0 flame rating, meets UL924, NFPA 70 and 101 Life Safety Code, NEC
Warranty.....	3-year warranty for unit, lifetime of battery has 500 recycle times



Electrical

- Dual 120/277 voltage
- Low energy consumption – only 2.0W at 120V
- LED indicator light and push button test switch
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Transfer switch automatically connects to internal battery to LED board for minimum 90-minute emergency illumination
- Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and to meet safety codes

Construction

- White injection-molded thermoplastic ABS housing
- Double-sided configuration
- Replaceable directional chevron inserts are easily moved and reinserted

Optics

- Six red or green LED's illuminate 6" H letters with 3/4" stroke
- Dual-sided, easily-visible lettering


Installation

- Universal top, end, or side mounting
- Innovative, snap-together design allows for fast installation
- Housing snaps to canopy with simple twist and lock

LED Compact Thermoplastic Exit Sign

Item #	Description	Light Color	Housing Color	Power
22742	Red LED Exit Sign Universal AC Only	Red	White	AC Only
22743	Red LED Exit Sign Universal w/Battery Backup	Red	White	AC and Battery Backup
22744	Green LED Exit Sign Universal AC Only	Green	White	AC Only
22745	Green LED Exit Sign Universal w/Battery Backup	Green	White	AC and Battery Backup

Dimensions

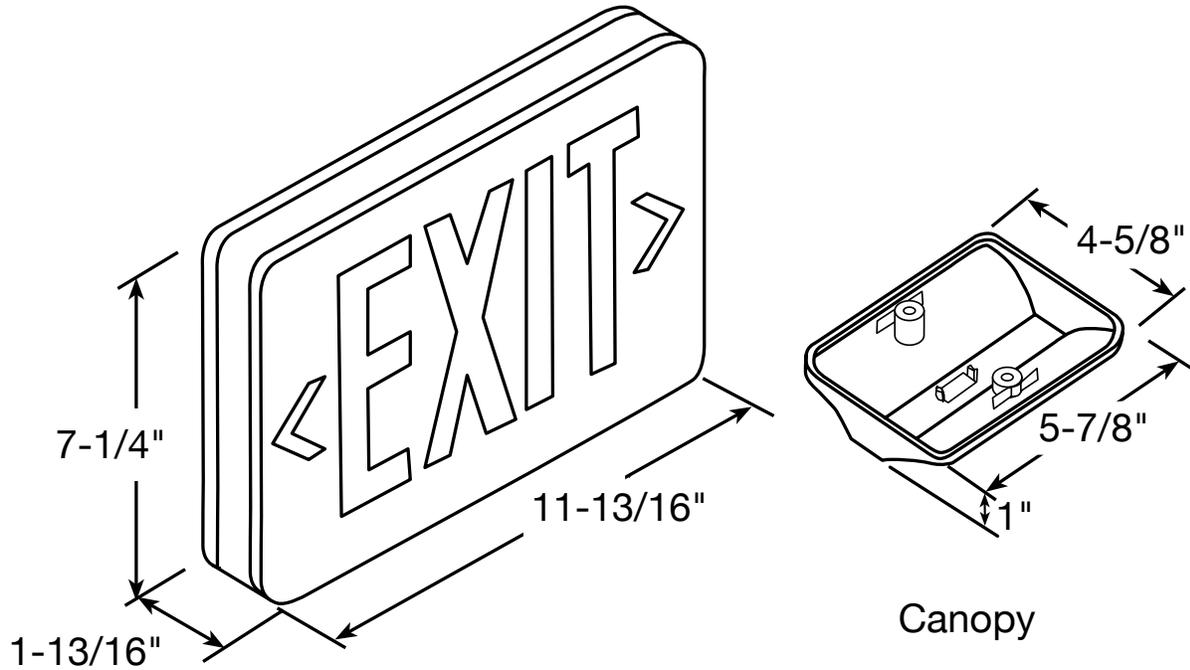

Listing

ETL Listed for Damp Locations, UL 94V-0 flame rating, meets UL924, NFPA 70 and 101 Life Safety Code, NEC

Warranty

3-year warranty for unit, lifetime of battery has 500 recycle times

Specifications and dimensions subject to change without notice.

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP MAR 2022/WF328700



3 YEAR
WARRANTY

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

Sales:

Date:

Model:

Project:

Rep:

Catalog Number:

Type:

Notes:



For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcpi.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516