


- 8P8-WS2-VNSC Finish(C) ☐  
 8P8-WS2-VNSGS Finish(GS) ☐  
 8P8-WS2-VNSY Finish(Y) ☐

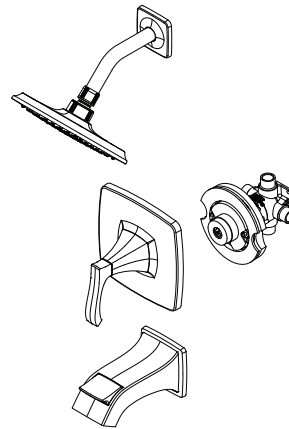

- SecurePfit™
- Pressure Balance
- Pforever Seal

## Specifications

### Features

- 1.8 GPM Flow Rate
- Raincan Showerhead
- SecurePfit™
- Includes OX8 Valve
- Unique Ribbon Waterflow Delivery Spout
- Pressure Balanced
- Spot Defense Finish Resists Spots and Fingerprints (GS Finish Only)
- Temperature Control
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- ASSE 1016
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.8 gpm, 6.8L/Min)



## Dimensions

