

Location:



2DIVBODYSRT Dual Outlet Diverter Valve Body Specification Submittal

Feature Highlights

- Symmons dual outlet diverter valve
- Shared functionality between two outputs with defined detents
- 2 discreet positions and 1 shared position
- Male IPS and sweat inlet/outlet connections
- Inlet/outlet connections in common plane
- Components shall be metal construction
- 360 degree handle rotation

Compliance

- ASME A112.18.1/CSA B125.1



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.


10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Model Numbers


- **2DIVBODYSRT**
Symmons Dual Outlet Diverter Valve Body

Dimensions

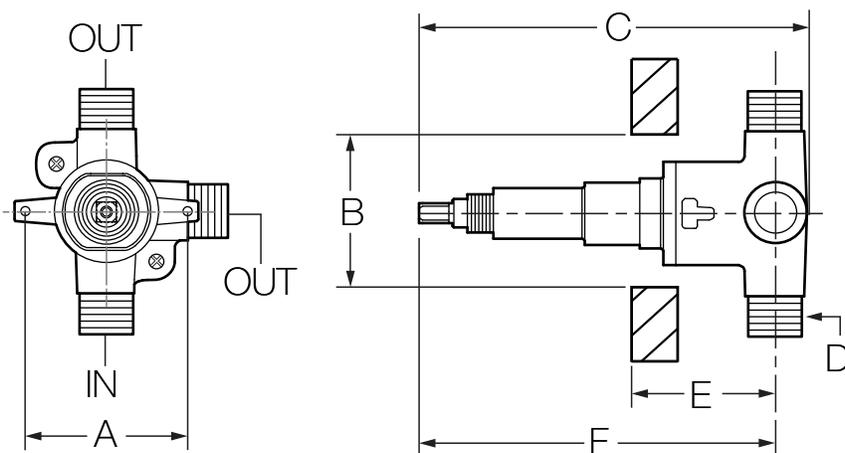

Measurements	
A	2-5/8", 67 mm
B	Hole Size Min. Ø 3", 76 mm Max. Ø 3-1/4", 83 mm
C	5-1/4", 133 mm
D	(3x) 1/2" male IPS & (3x) 1/2" female sweat
E	See note 1
F	4-7/8", 124 mm
G	Hole Size Min. Ø 1-3/4", 44 mm Max. Ø 1-7/8", 48 mm LD-15A Escutcheon: 2DIV Temptrol Commercial Safetymix Visu-Temp

LD-15A Escutcheon

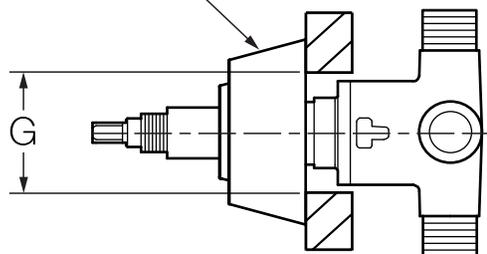

Notes:

- 1) Figure is determined by style of trim attached to shower valve.
See rough-in dimension drawing for shower valve application with diverter valve.
- 2) Dimensions subject to change without notice.