

SPECIFICATIONS


FIGURE 7207 BEAM CLAMPS



UL/FM WIDE MOUTH BEAM CLAMP

FEATURES

- Finish: Plain or plated
- MSS SP-58, Type 19
- Material: Malleable iron ASTM A47 Grade 32510
- Wide throat
- Hanger rod not included

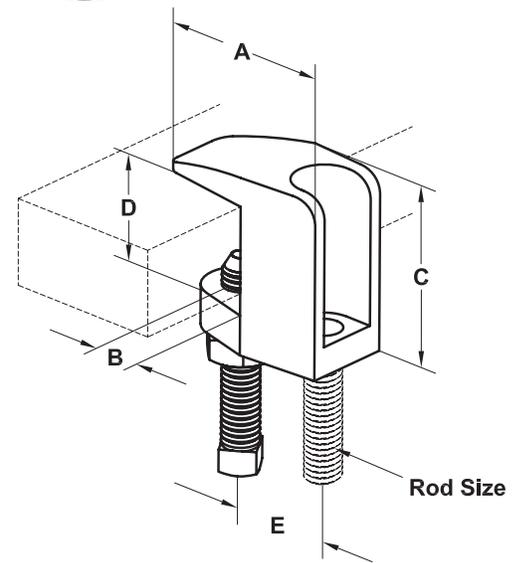

REFERENCE CHART

Catalog Number	Rod Size	Finish	Dimensions (in.)					Wt. (lbs)	Max Load (lbs)	Set Screw Torque
			A	B	C	D	E			
FNW7207UPC	3/8"-16	Plain	1.93"	0.56"	2.13"	1.25"	1"	0.362	400	5
FNW7207UPD	1/2"-13	Plain	2.18"	0.50"	2.42"	1.25"	1"	0.705	800	5
FNW7207UZC	3/8"-16	Plated	1.93"	0.56"	2.13"	1.25"	1"	0.375	400	5
FNW7207UZD	1/2"-13	Plated	2.18"	0.50"	2.42"	1.25"	1"	0.716	800	5

Note: Do not overtighten the set screw or the clamp can be damaged. The recommended torque for set screw is 60 lbf-in for 3/8" and 125 lbf-in for 1/2".