

Specifications

PF4001PLS90

ACCUFIT® Pressure Balance Tub and Shower Faucet Valve




Product Features

- ACCUFIT® Pressure balance valve less stops
- One-piece cartridge design for ease of maintenance
- Ceramic disc valve cartridge
- Back-to-back capability
- Forged brass valve body
- Optional air test cap available
- Adjustable temperature limit stop
- IAPMO Approved
- Quick remove plaster guard
- Easy mounting brackets
- Meets or exceeds ASSE 1016-P standards (anti-scald)

Model Numbers

- PF4001PLS90** Ceramic disc tub and shower valve without stops PEX ASTM F1807 crimp connector
- PF4001WPLS90** Ceramic disc tub and shower valve without stops PEX ASTM F1960 Uponor (Wirsbo) connector

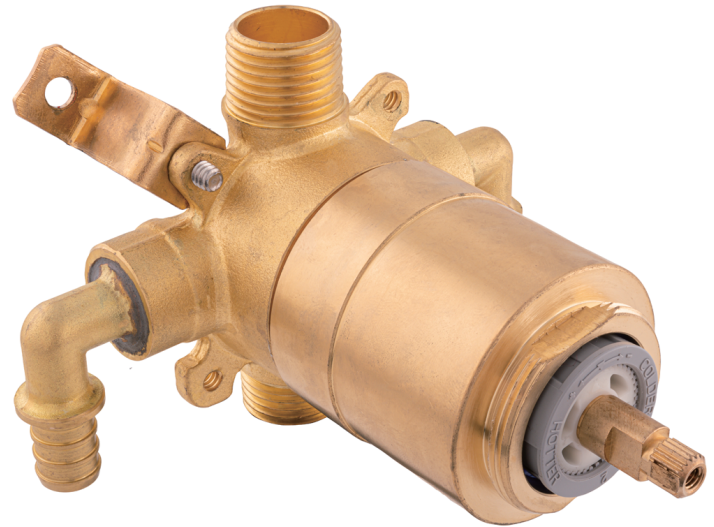

PF4001PLS90

Available Parts

- ACF4001UCRT** Replacement cartridge assembly
- ACF4001AIR** Air test cap
- ACF4001GRD2** Plaster guard
- ACF4001EXTCP** Deep rough extension kit CP
- ACF4001EXTBN** Deep rough extension kit BN
- ACF4001EXTORB** Deep rough extension kit ORB
- ACF4001EXTPN** Deep rough extension kit PN

Important Note

Pressure Balancing Valves, regardless of brand, are generally not recommended for use with tankless (on-demand) water heaters. Pressure Balancing Valves adjust to the lowest incoming water pressure. Because outgoing hot-water pressure of tankless water heaters can sometimes be significantly lower than household cold-water pressure, the result can be unsatisfactory water pressure in the shower.

Flow Rates (Gallons per minute)

PF4001 Valves	20psi	30psi	40psi	50psi	60psi	70psi	80psi
Less stops	3.46	4.23	5.02	5.68	6.34	6.87	7.26


All product traffic data is an average.

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO faucet carries a limited lifetime warranty when installed in residential applications. The warranty is five years in commercial applications. This product meets ASME A112.18.1/CSA B125.1 and ASSE 1016-P.

©2023 Ferguson Enterprises, LLC 0523 xxxxxx

Product Specifications

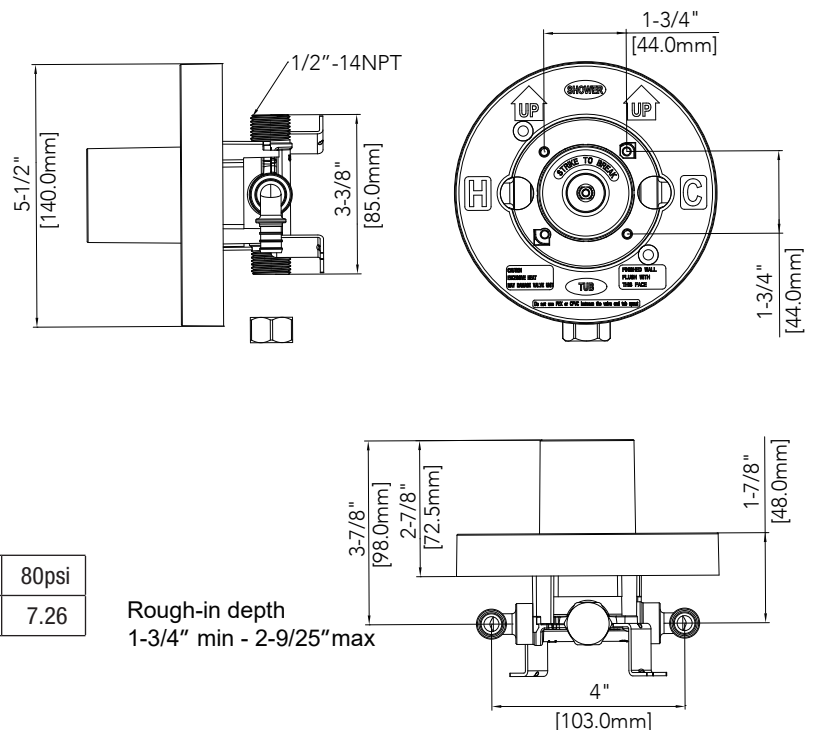

Rough-in depth
1-3/4" min - 2-9/25" max



FERGUSON.COM/PROFLO