Neo® Diverter Trim and Shower Combination (Valve not included)

FEATURES:

• CPT-1401: Diverter Shower Valve Trim 2.5 GPM (9.5 L/min Flow Rate • S-3010:

Shower Head

• S-2540: Shower Arm and Flange

VALVE OPTIONS:

• CPV-PB-DV: Pressure Balance Diverter Valve Sweat &

Thread Connections

• CPV-PB-DV-PXC: Pressure Balance Diverter Valve PEX

F1807 Crimp Inlet Connections

• CPV-PB-DV-PXE: Pressure Balance Diverter Valve PEX

F1960 Cold-Expansion Inlet Connections

• CPV-T-DV: Thermostatic Diverter Valve Sweat &

Thread Connections

• CPV-T-DV-PXC: Thermostatic Diverter Valve PEX F1807

Crimp Inlet Connections

• CPV-T-DV-PXE: Thermostatic Diverter Valve PEX F1960

Cold-Expansion Inlet Connections

STOCK FINISHES:



STANDARDS:

• ASME A112.18.1/CSA B125.1 certified

ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

• See Speakman.com For Warranty Information








Information continues on next page

Neo® Diverter Trim and Shower Combination (Valve not included)

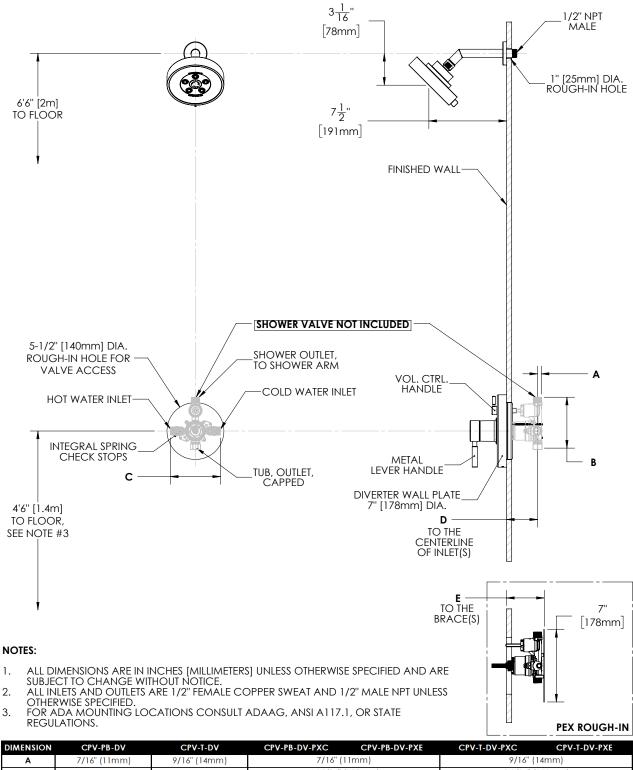

DIMENSION	CPV-PB-DV	CPV-T-DV	CPV-PB-DV-PXC	CPV-PB-DV-PXE	CPV-T-DV-PXC	CPV-T-DV-PXE
Α	7/16" (11mm)	9/16" (14mm)	7/16" (11mm)		9/16" (14mm)	
В	4-15/16" (125mm)	5-1/16" (128mm)	4-15/16" (125mm)		5-1/16" (128mm)	
С	4-13/16" (123mm)	5-7/8" (150mm)	4-13/16" (123mm)		5-7/8" (150mm)	
D	2-1/2" (63mm) MIN TO 3-1/2" (89mm) MAX					
E			3-1/8" (79mm) MIN TC	4-1/8" (105mm) MAX	3-3/16" (81mm) MIN TO	4-3/16" (106mm) MAX

Architect/Engineer Approval Space:

P: 800-537-2107

F: 800-977-2747

W: WWW.SPEAKMAN.COM R: 01-JANUARY 2019