695XL

Deepest, Most Versatile Gas Power Cutter

The 695XL features include an easy to start engine with higher energy ignition system and durable, long-lasting components including a new muffler, carburetor and piston & cylinder. Available with 12-inch (30 cm) - 16-inch (40cm) guidebars and the entire line of FORCE3, FORCE4 and PowerGrit series diamond chains. Based on the best-selling 695 power cutter platform, the 695XL is the highest horsepower ICS gas power cutter for frequent-use by general construction, utility contractors and concrete professionals.

695XL PRODUCT SPECIFICATIONS

Engine Type	2-stroke, Air Cooled
Displacement	94 cc (5.7 cu-in)
Horsepower	4.8 kW (6.4 hp) @ 9000 rpm
Torque	5.7 Nm (50.4 in-lbs) @ 7,200 rpm
Engine Speed	9,300 +/- 150 rpm (max) 2,700 +/- 100 rpm (idle)
Chain Speed at Maximum Power	28 m/s (5500 ft/min)
Weight	9.5 kg (21 lbs) powerhead only
Dimensions	46 cm (18 in) length 36 cm (14 in) height 30 cm (12 in) width
Starter	Recoil, dust and water resistant
Ignition	Special water resistant electronic ignition
Fuel ratio	2% (50:1) gasoline-to-oil
Fuel Capacity	1 liter (0.26 gallon)
Water Supply Requirement	Minimum 1.5 bar (20 psi)
Water Flow Requirement	Minimum: 4lpm (1 gpm)
Guaranteed Sound Power Level, L _{wa} (1)	115 dB(A); (K _{wa} =1.0 dB(A))
Equivalent Sound Pressure at the Operator's Ear L _{pA}	104.6 dB(A) (K=1.0 dB(A))
Vibration, a _{hv.eq} Concrete Cutting (2)	3.6 m/s² (K=1.0 m/s²) Front Handle 3.1 m/s² (K=1.0 m/s²) Rear Handle
Vibration, a _{hv.eq} Pipe Cutting (2)	5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear Handle










(1) Measured in accordance with ANSI S12.51-2012/ISO3741:2010


(2) Measured in accordance with ISO5349-1:2001, ISO22867:2011 and ISO19432:2012



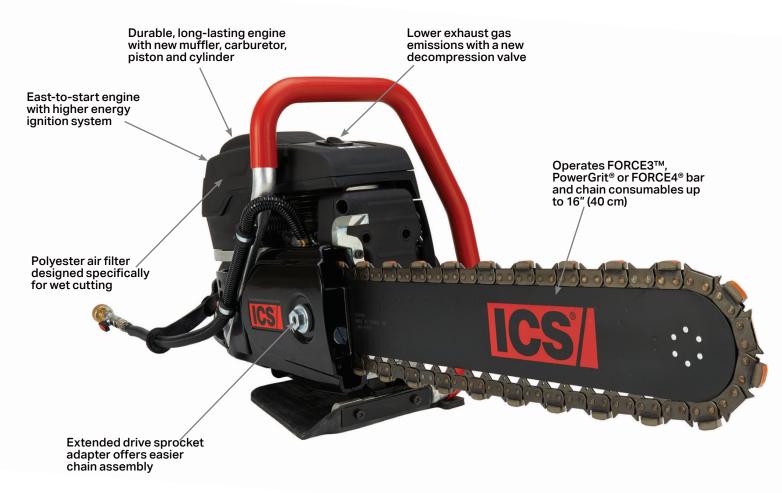



Deep cutting solution for obstructed or small openings



Easy tensioning of chain



Safer to cut ductile iron



Versatile

