

## FAUCET DESCRIPTION

- Metal construction with chrome plated finish
- 1/2" IPS connections
- Supplied with vandal resistant screws

## OPERATION

- Lever style handles with hot and cold color indicators
- Rotate the hot side handle in a counterclockwise manner to open (clockwise to close) and rotate the cold side handle clockwise to open (counterclockwise) to close
- ADA Compliant

## FLOW

- 2.2 MAX. gpm (8.3 L/min) aerator

## CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel material

## STANDARDS

- Third party certified by CSA to meet CSA B-125 and ASME A112.18.1M and all applicable specifications referenced therein and complies with the requirements of ANSI A117.1, NSF 61/9, and California Proposition 65.

## WARRANTY


- Warranted for 5 years against material or manufacturing defects

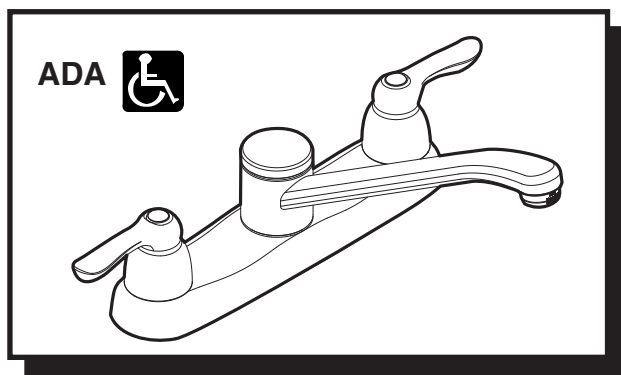

## SANI-STREAM® Two-Handle Kitchen Faucet

Model: 8780

**NOTE:** Designed to be installed through  
3 holes - 1" min. Dia. and on 4" centers

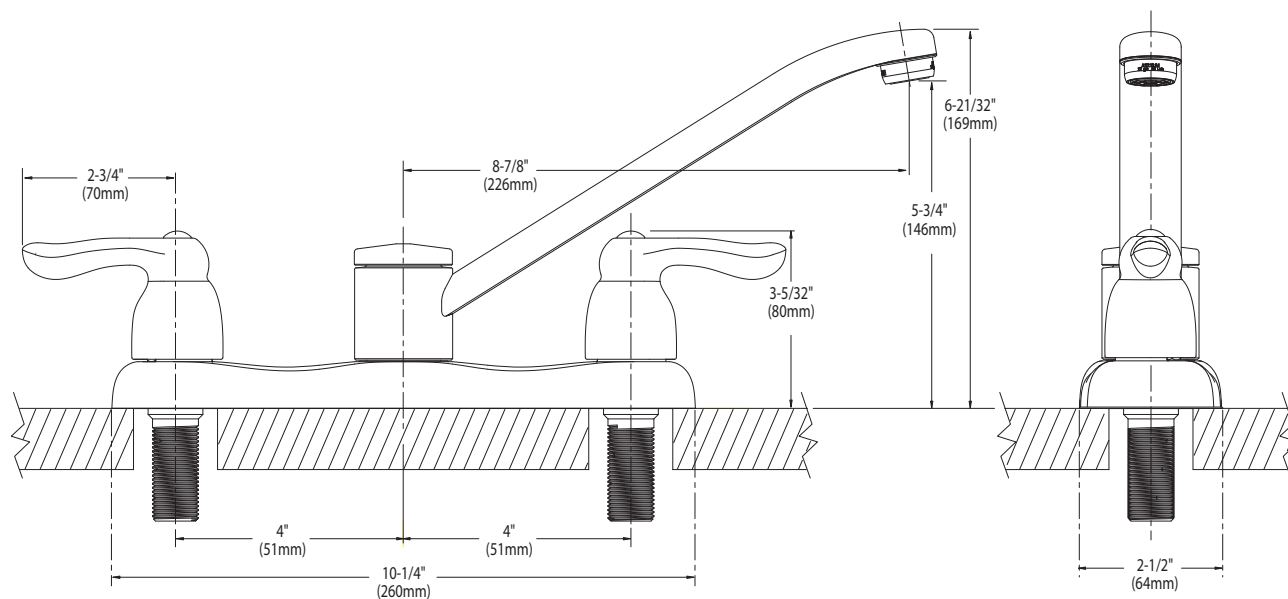

## CRITICAL DIMENSIONS

(DO NOT SCALE)

## FAUCET DESCRIPTION

- Chrome plated metal construction
- 1/2" IPS connections
- Supplied with vandal resistant screws

## OPERATION

- Wing style handles with hot and cold color indicators
- Rotate the hot side handle in a counterclockwise manner to open (clockwise to close) and rotate the cold side handle clockwise to open (counterclockwise) to close
- ADA Compliant

## FLOW

- 2.2 MAX. gpm (8.3 L/min) aerator

## CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel material


## STANDARDS

- Third party certified by CSA to meet CSA B-125 and ASME A112.18.1M and all applicable specifications referenced therein and complies with the requirements of ANSI A117.1, NSF 61/9, and California Proposition 65.

## WARRANTY

- Warranted for 5 years against material or manufacturing defects

ADA

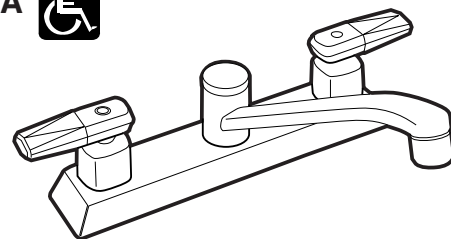


## SANI-STREAM® Two-Handle Kitchen Faucet

Model: 8780

**NOTE: See reverse side  
for illustrated parts**

**NOTE: DESIGNED TO BE  
INSTALLED THROUGH 4 HOLES -  
1" MIN. DIA. AND ON 4" CENTERS**

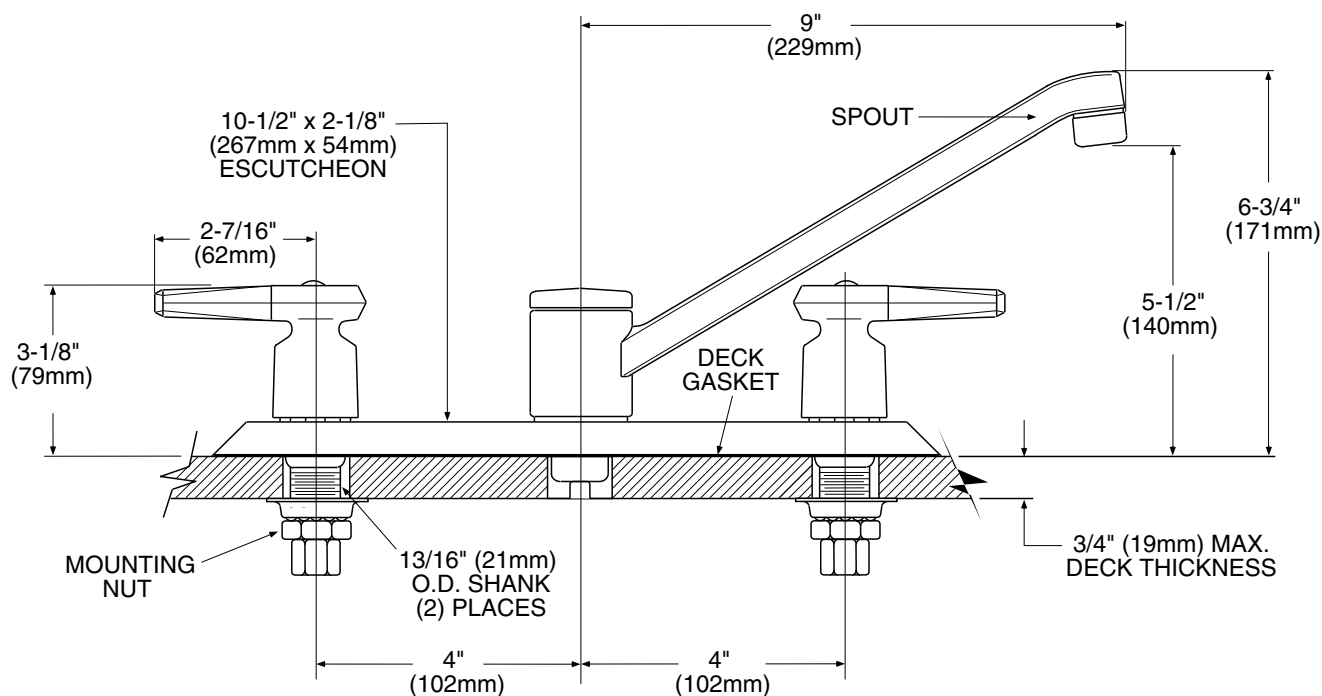

FRONT VIEW

## CRITICAL DIMENSIONS

(DO NOT SCALE)