



SUBMITTAL INFORMATION

MJ Gripping Style Restraint - (*FUR-S-x-I style*)



**2"-12" UNI-RING MECHANICAL JOINT RING RESTRAINT
FOR STEEL SIZE O.D. PVC AND HDPE PIPE AND STEEL PIPE (2"-3" ONLY)
NOT FOR USE ON STEEL SIZE PVCO - C909**

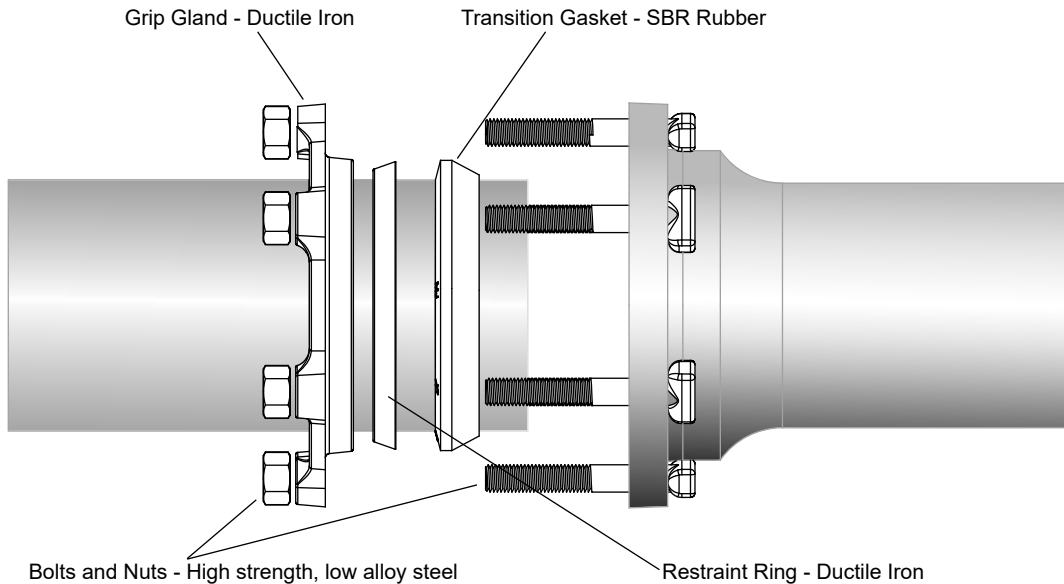

NOM. PIPE SIZE	OD (IN.)	CATALOG NUMBER	APPROX. WEIGHT	NUMBER OF BOLTS	BOLT SIZE	✓ SUBMITTED ITEMS
2"	2.38	FUR-S-2-I	3.0	2	5/8" x 3-1/2"	
3"	3.50	FUR-S-3-I	4.0	4	5/8" x 3-1/2"	
4"	4.50	FUR-S-4-I	9.0	4	3/4" x 3-1/2"	
6"	6.63	FUR-S-6-I	12.0	6	3/4" x 3-1/2"	
8"	8.63	FUR-S-8-I	15.0	6	3/4" x 4"	
10"	10.75	FUR-S-10-I	21.0	8	3/4" x 4"	
12"	12.75	FUR-S-12-I	24.0	8	3/4" x 4"	

Note: Ford recommends the use of an insert stiffener when used on HDPE.

Note: Shorter bolts may be required when used with MJ x Flange valves and fittings

FEATURES

- Fits steel size O.D. PVC and HDPE pipe and steel pipe (2" and 3" only)
- Restraint ring: Ductile iron per ASTM A536, Grade 65-45-12, with black e-coat epoxy and gray topcoat for identification purposes
- Gland: Ductile iron per ASTM A536, Grade 65-45-12 with black e-coat epoxy and gray topcoat for identification purposes
- Gasket: SBR rubber per ASTM D2000 - NSF 61 approved. NBR (Buna-N) and EPDM optional
- Bolts & Nuts: High strength, low alloy steel per ASTM A242 and AWWA C111. Blue fluorocarbon coating, type 304 stainless steel and type 316 stainless steel optional
- 2:1 safety factor at the full rated pressure of the pipe

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



07/09/19

Submitted By: