



# Model ZW5000

## Pressure-Tru® Fire Hose Valve

### Application

The Pressure-Tru® ZW5000 Series Pressure Reducing Valve is listed as a standpipe valve for individual hose stations in CLASS I and CLASS III systems. Regulates pressure under both FLOW and NO-FLOW conditions. Ideal for applications where immediate field adjustments are needed. Can be factory set and adjusted or set in the field as needed

### Standards Compliance

- UL® Listed
- C-UL® Listed

### Material

Main valve body	Cast bronze	ASTM B806
Stem	Cast bronze	ASTM B806
Flange	Cast bronze	ASTM B806
Elastomers	Buna Nitrile (FDA approved)	EPDM (FDA approved)
Springs	Chrome silicon, ASTM A401	powder coated

### Features

Sizes: 2 1/2"

Maximum inlet pressure	400 psi
End connection (FNPT)	ANSI B1.20.1
(Grooved)	AWWA C606
(Male hose)	NFPA1963

### Factory or Field Set

Maximum inlet pressure	400 psi
Inlet connection (ZW5000)	FNPT or Groove
Inlet connection (ZW5000F)	FNPT
Outlet connection (ZW5000)	Male hose
Outlet connection (ZW5000F)	FNPT

### Factory or Field Set

Tapped and plugged inlet and outlet for pressure gauge.




PATENT PENDING

ZW5000


### Options

(Suffixes can be combined)

- ZW5000 - angle type valve
- IL - in-line (globe type) valve
- G - with grooved inlet
- SF - with San Francisco hose thread (3")
- ST - with special hose thread
- CC - with cap and chain
- CH - with chrome finish
  
- ZW5000F - female NPT inlet and outlet angle valve
- IL - female NPT inlet and outlet in-line valve
- CH - with chrome finish

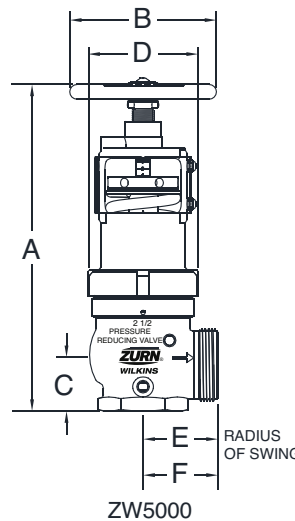

ZW5000

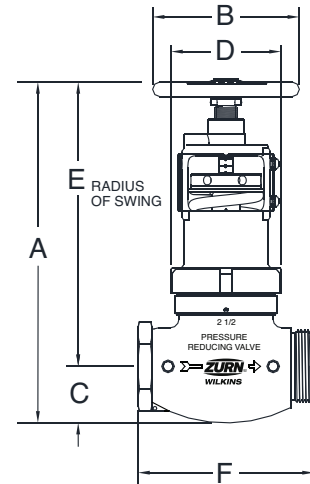

ZW5000IL

### Dimensions & Weights (do not include pkg.)

MODEL	DIMENSIONS (approximate)															
	A OPEN		A CLOSED		B		C		D		E		F		WEIGHT	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs	kg
ZW5000	13 7/8	352	13 3/8	340	6 1/4	159	2	51	5	127	3 1/2	89	3 1/4	83	22.5	10.2
ZW5000IL	14 1/2	368	14	356	6 1/4	159	2 1/2	64	5	127	12 7/16	316	7 1/2	191	26.75	12.1
ZW5000G	14 1/2	368	14	356	6 1/4	159	2 1/2	64	5	127	N/A	N/A	3 1/4	83	22.5	10.2
ZW5000ILG	14 1/2	368	14	356	6 1/4	159	2 1/2	64	5	127	N/A	N/A	8 3/4	222	27	12.2
ZW5000F	13 7/8	352	13 1/4	337	6 1/4	159	2	51	5	127	3 1/2	89	3 1/16	78	23	10.4
ZW5000FIL	14 1/2	368	14	356	6 1/4	159	2 1/2	64	5	127	12 7/16	316	7 1/2	191	27.25	12.4
ZW5000SF	13 7/8	352	13 3/8	340	6 1/4	159	2	51	5	127	3 3/4	95	3 3/8	86	22.5	10.2







Zurn Industries, LLC | Wilkins  
 1747 Commerce Way, Paso Robles, CA U.S.A. 93446 Ph. 855-663-9876, Fax 805-238-5766  
 In Canada | Zurn Industries Limited  
 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 Ph. 905-405-8272, Fax 905-405-1292

www.zurn.com

Rev. C  
 Date: 6/20  
 Document No. FV-ZW5000  
 Product No. Model ZW5000





# Residual Pressure Charts

For Pressure-Tru® 2 1/2" Models

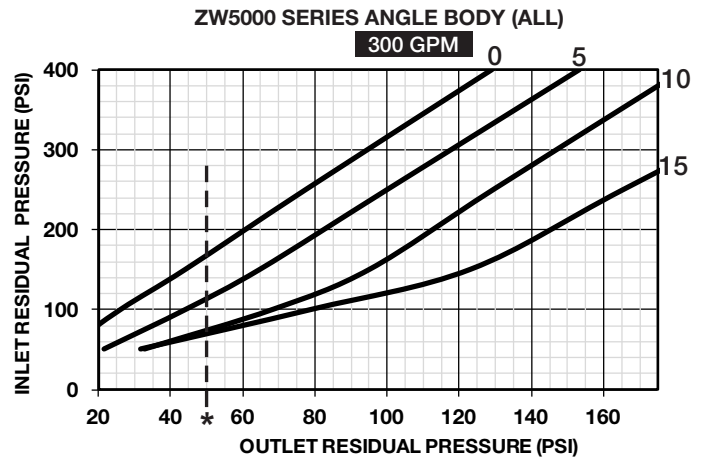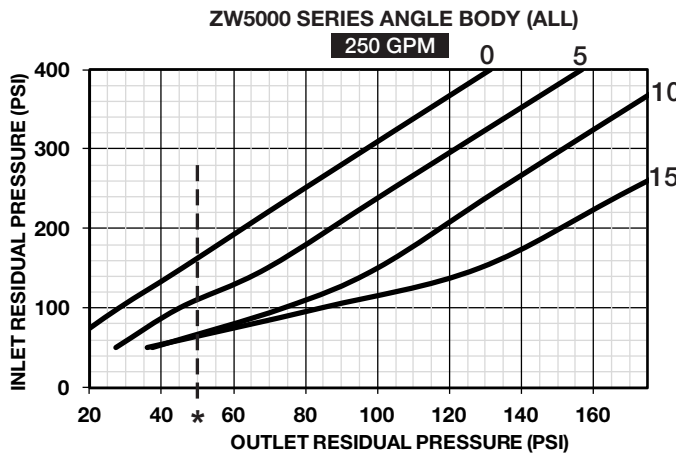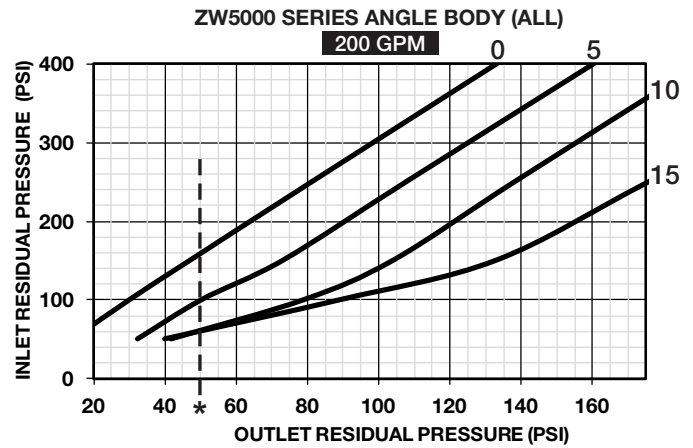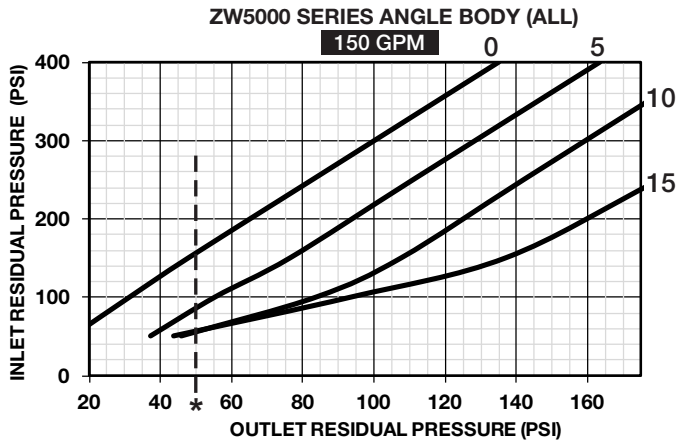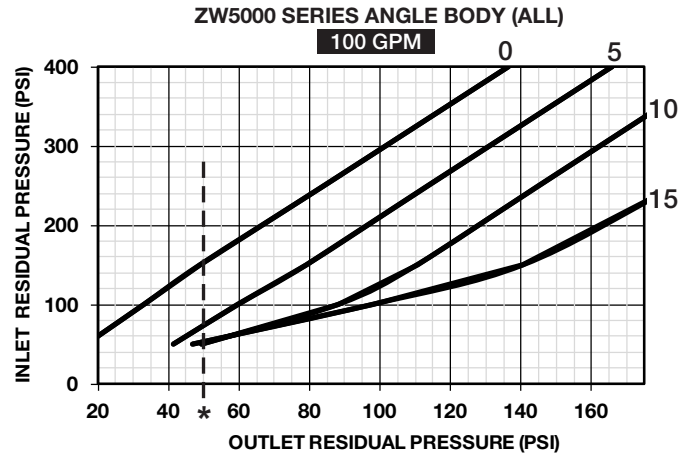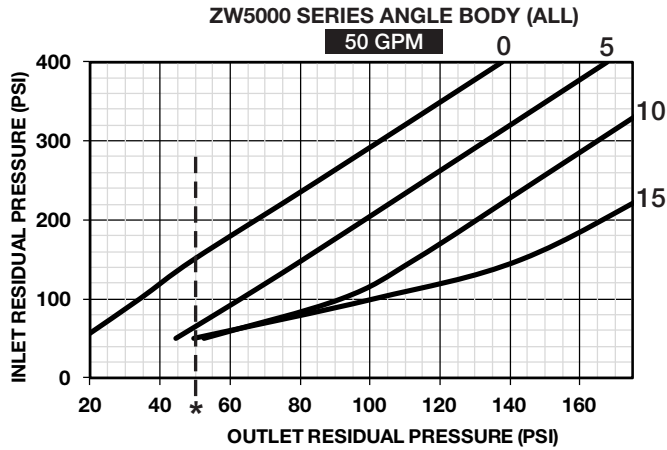

# Residual Pressure Charts


For Pressure-Tru® 2 1/2" Models

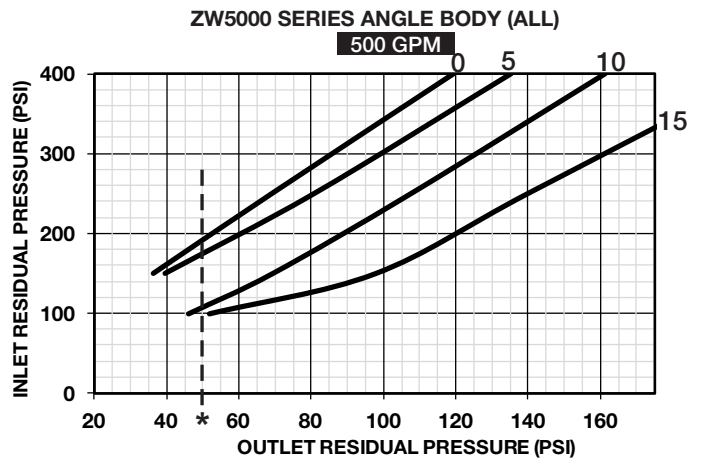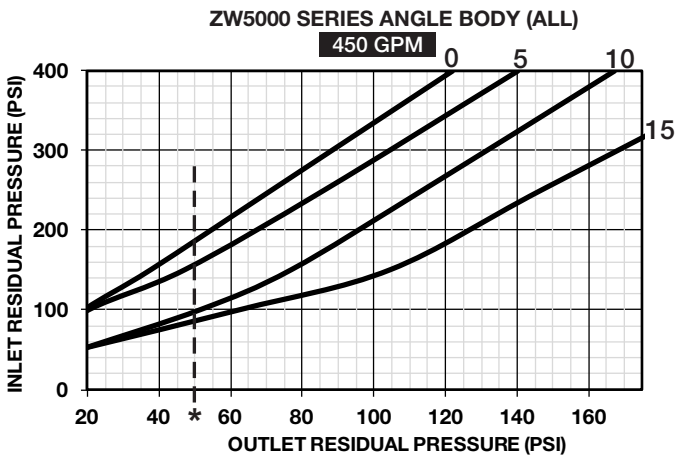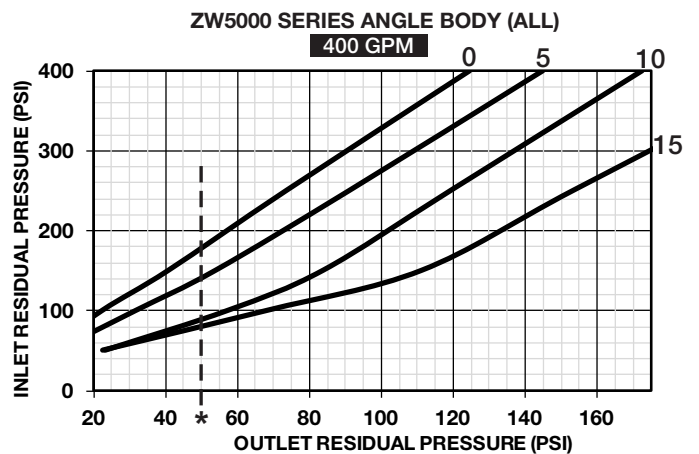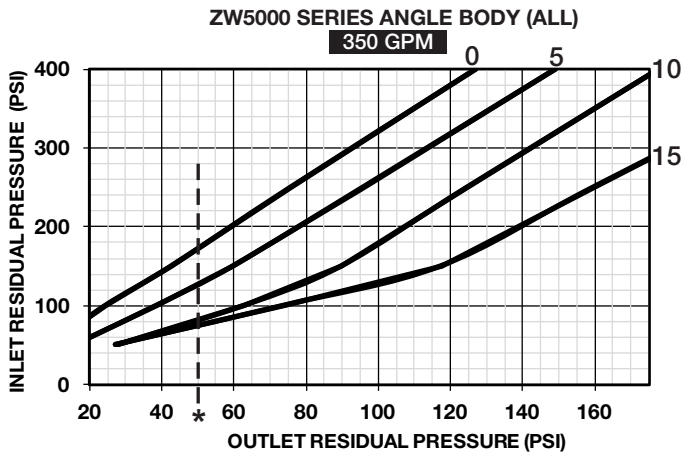

## STATIC PRESSURE CHART

For Pressure-Tru® Angle  
and In-line Valves  
(2-1/2" Inlet and Outlet)


MODELS:  
ZW5000, ZW5004 and ZW5000F  
(ALL)

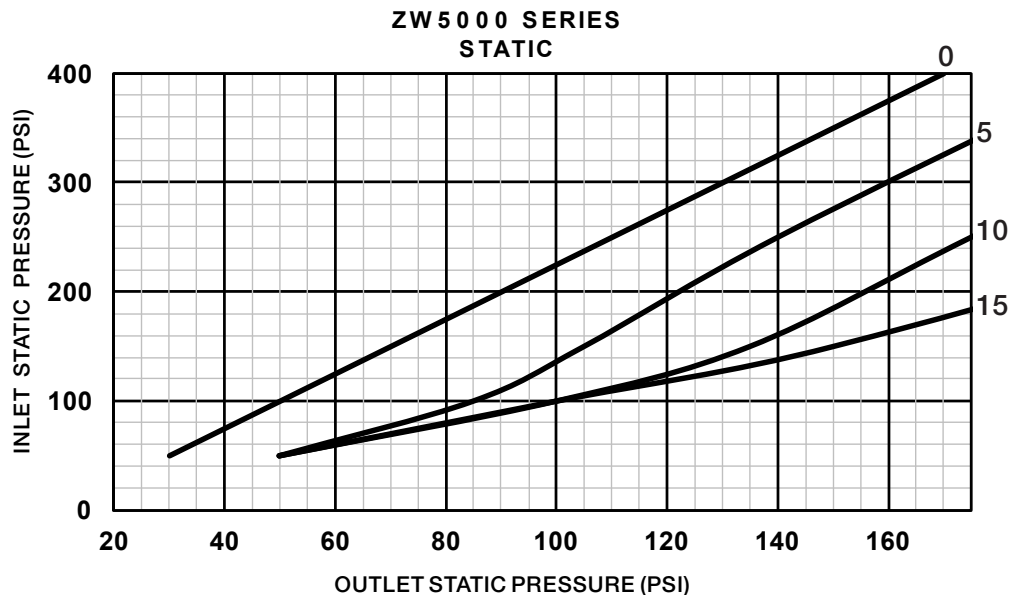

**Note: Curve accuracy= ±5 PSIG \*50 PSI Minimum setting for sprinkler systems**

# Residual Pressure Charts

For Pressure-Tru® 2 1/2" Models

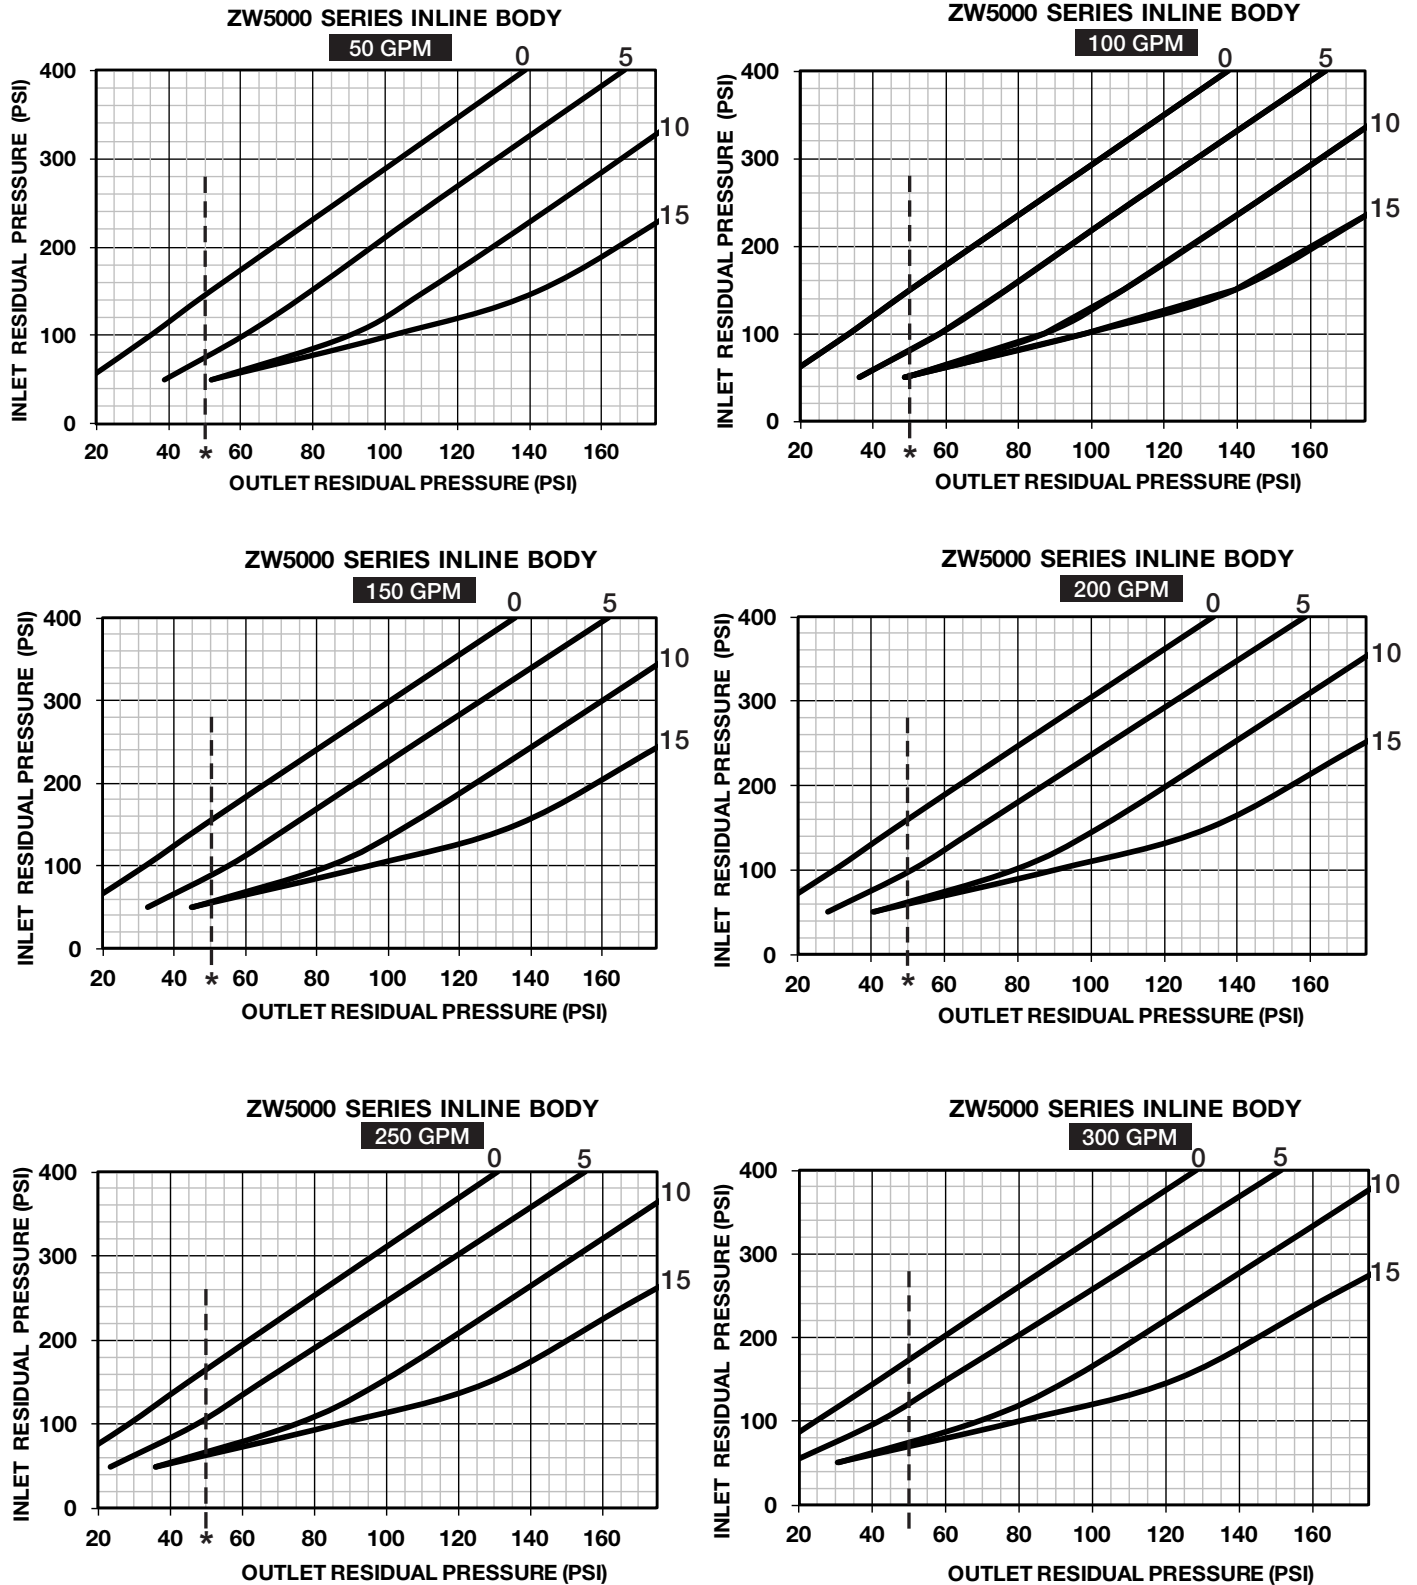


# Residual Pressure Charts

For Pressure-Tru® 2 1/2" Models


ZW5000 SERIES INLINE BODY

350 GPM

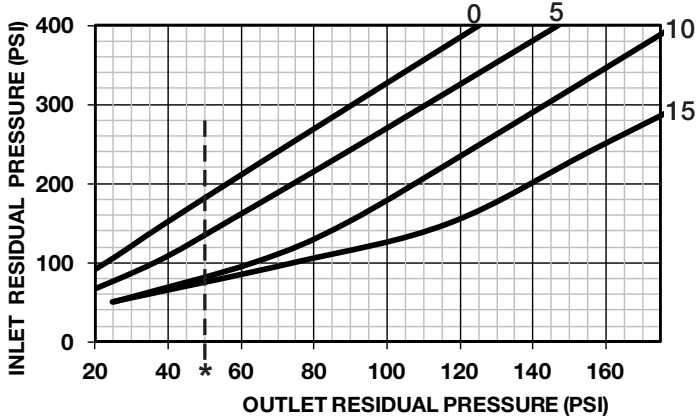


ZW5000 SERIES INLINE BODY

400 GPM

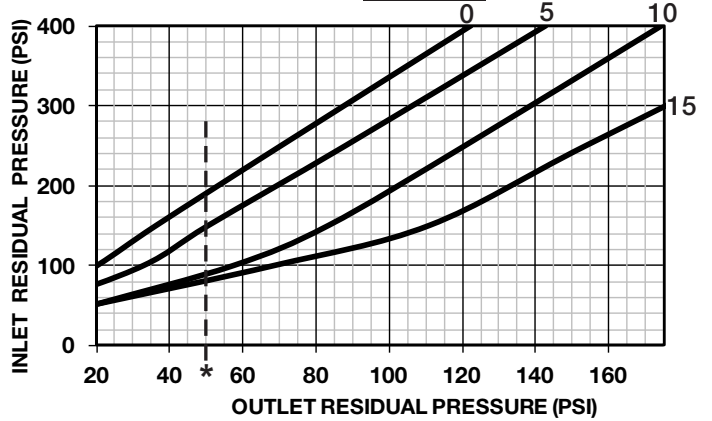

ZW5000 SERIES INLINE BODY

450 GPM

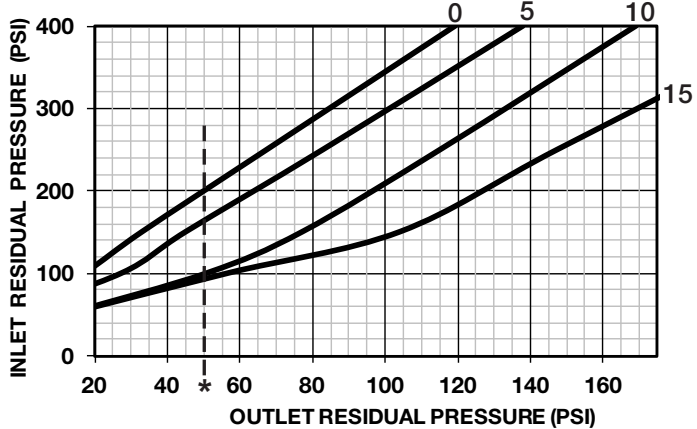

ZW5000 SERIES INLINE BODY

500 GPM

