

## DESCRIPTION

- Brass Construction
- Pressure balancing valve design with 1/2" PEX or CPEX connections (with 1/2" CC tub drop)
- Tub outlet - 8" x 7" x 1/2" copper tube

## OPERATION

- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^\circ$

## CARTRIDGE


- 1222 cartridge design
- Accommodates back to back installations

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1, ASSE 1016, and all applicable requirements referenced therein



## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

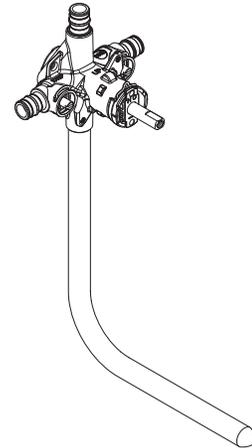

## POSI-TEMP® VALVE Pressure-Balancing Valve

<b>Models:</b> 2385PF / FP62385PF (bulk)	4 Port Posi CPEX w/ CC drop with stops
2360PF / FP62360PF (bulk)	4 Port Posi PEX w/ CC drop with stops
FP62365PF (bulk)	4 Port Posi CPEX w/ CC drop blk pk
FP62380PF (bulk)	4 Port Posi PEX w/ CC drop blk pk

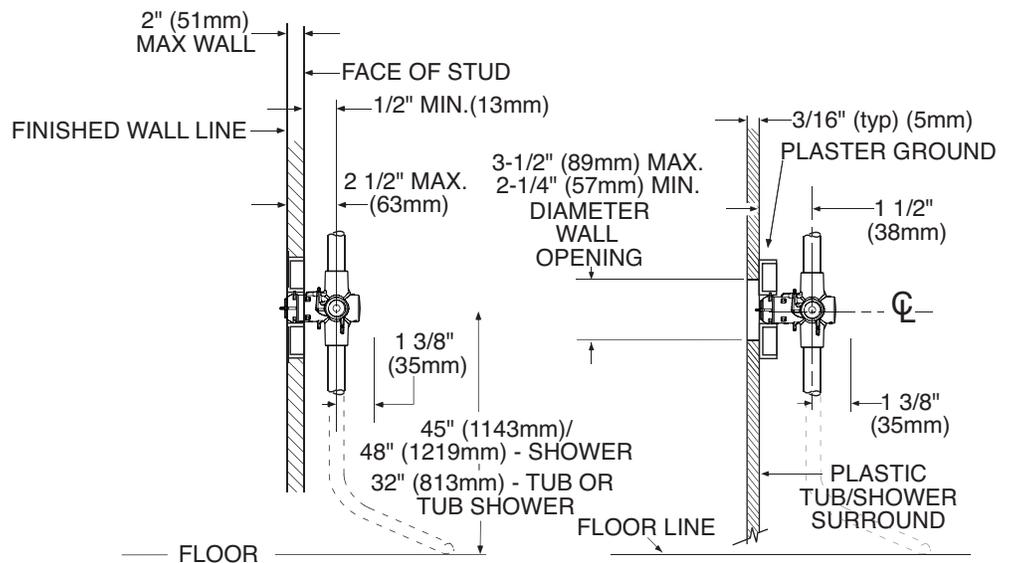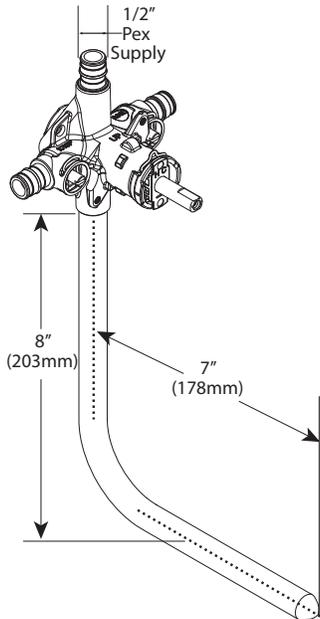

## CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

[www.moen.com](http://www.moen.com)