

Protecto-Lube

PRODUCT DESCRIPTION:

JAX Protecto-Lube is a dry-film moly spray that gives positive protection against wear, rust and corrosion. The exclusive formulation includes molybdenum disulfide, which creates a friction-reducing film that resists heat, cold, moisture and salt.

APPLICATION:

JAX Protecto-Lube is ideal as a protective coating on seasonal equipment such as plow blades, lawn mower decks, agricultural machinery, saw blades, snow removal equipment, salters, sanders and shovels. JAX Protecto-Lube also provides protection for metal surfaces for long-term storage or shipping overseas. After working in, JAX Protecto-Lube leaves a smooth, dry film with a thickness of less than 0.0001".

Use JAX Protecto-Lube on chains and conveyors where an oil-based "wet" lubricant is not practical, yet antiwear and extreme-pressure protection are needed. Once dry, the moly lubricant gives outstanding high- and low-temperature performance, making it ideal as an anti-seize for applications such as head bolts, manifolds, muffler clamps, and furnace, oven and kiln maintenance. JAX Protecto-Lube is temperature-resistant to 800°F (427°C).

For Extreme-Pressure metal-to-metal applications, consider that in looking at the metallic surfaces through a microscope, you would see a rough surface with ridges and gaps. If another metal surface is to slide or turn on top of that, Protecto-Lube will fill the gaps with its fine particulate dry-lube chemistry thus smoothing the contact area and reducing friction and wear and eliminating metal-to-metal contact.


TECHNICAL DATA:

Propellant:	Propane and n-Butane
Flash Point:	N/A
Spray Pattern:	Mist
Viscosity:	Dry Film: N/A
Texture:	Extremely Dry, Fine MoS ₂ Particulate Film
Appearance:	Powdery Liquid Until Dry
Consistency:	Powdery Liquid

AEROSOL PACKAGING:

11 oz. net weight aerosol cans (12/case) — Part # JAX112



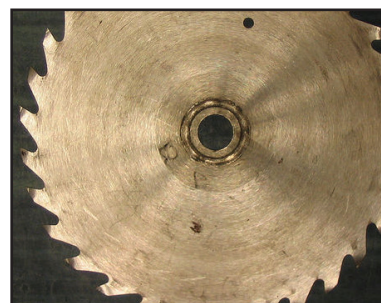

NSF International / Nonfood Compounds Registration Program

August 27, 2004

Ms. Patty Riek
PRESSURE-LUBE, INC. JAX
W134 N5373 CAMPBELL DRIVE
MENOMONEE FALLS, WI 53051

RE: JAX PROTECTO-LUBE (Aerosol)
Category Code: H2
NSF Registration No. 133886

Dear Ms. Patty Riek:

NSF has processed the application for Registration of **JAX PROTECTO-LUBE (Aerosol)** to the NSF Registration Guidelines for Proprietary Substances and Nonfood Compounds (2004), which are available at <http://www.nsf.org>. The NSF Nonfood Compounds Registration Program is a continuation of the USDA product approval and listing program, which is based on meeting regulatory requirements including FDA 21 CFR for appropriate use, ingredient and labeling.

This product is acceptable as a lubricant where there is no possibility of food contact (H2) in and around food processing areas. Such compounds may be used as lubricants, release agents, or antirust films on equipment and machine parts in locations in which there is no possibility of the lubricant or lubricated part contacting edible products.

NSF Registration of this product is current when the NSF Registration Number, Category Code, and Registration Mark appear on the NSF-approved product label, and the registered product name is included in the current NSF White Book Listing of Nonfood Compounds at the NSF website (<http://www.nsf.org>). The NSF Registration Mark can be downloaded from the NSF website, at http://www.nsf.org/business/about_NSF/nsf_marks_download.asp.

NSF Listing of all registered Nonfood compounds by NSF International is not an endorsement of those compounds, or of any performance or efficacy claims made by the manufacturer.

Registration status may be verified at any time via the NSF web site, at <http://www.nsf.org>. Changes in formulation or label, without the prior written consent of NSF, will void registration, and will supersede the on-line listing.

Sincerely,

Carmen Grindatti
NSF Nonfood Compounds Registration Program

Company No: N05625

Distributed By:

PRESSURE-LUBE
America's Finest Lubricants

W134 N5373 Campbell Drive • Menomonee Falls, WI 53051
262.781.8850 • 800.782.8850 • FAX 262.781.3906
www.jax.com