

RAINCAN SHOWERHEAD/ FIXED COMBO

■ 5 Spray Setting Showerhead

FEATURES

- H₂Okinetic Technology® Showerhead
- Touch-Clean® Nozzles

STANDARD SPECIFICATIONS

- Max flow rate 2.0 gpm @ 80 psi, 7.6 L/min @ 550 kPa.
- Five function showerhead - not a positive shut-off.
- Change showerhead spray settings by rotating the spray face.
- Single function raincan.
- Diverter allows for single or shared operation of showerhead and Raincan.
- The brass ball joint swivel angle is 10° (5° per side).
- The Raincan rotates 40° for adjustable coverage.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

Submitted Model No.: _____

Specific Features: _____

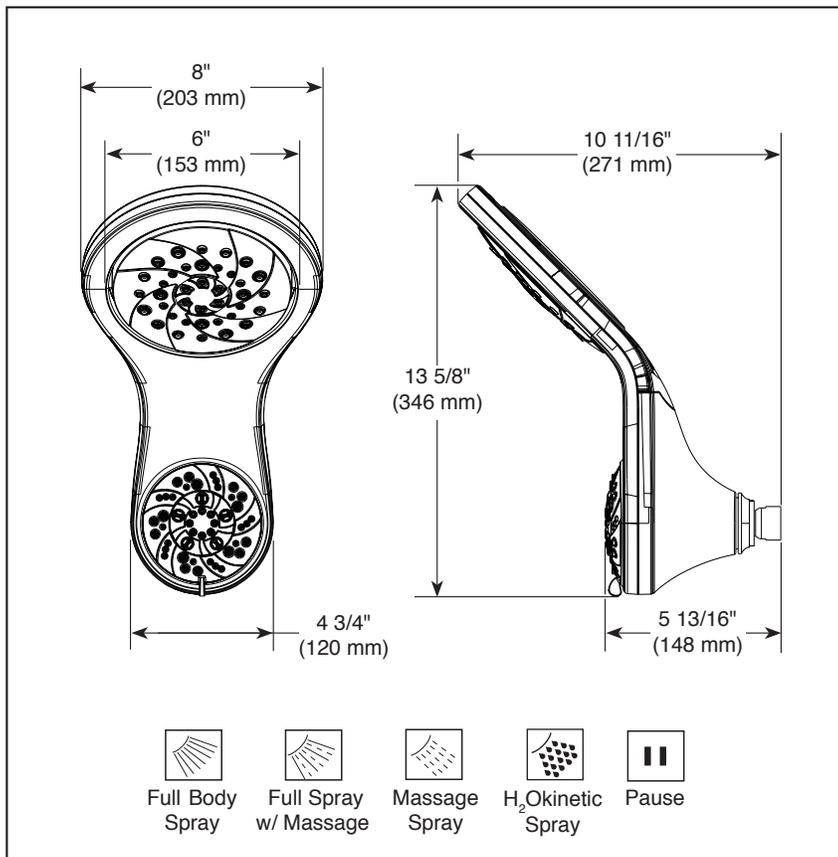

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-58581-PK Rev. A



55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2017 Masco Corporation of Indiana