

Specifications

PF1726WH High-Efficiency Flush Valve Bowl



Product Features

- Vitreous china
- 4-1/4" rough-in
- Floor mount rear toilet
- 1.0 gpf (3.78 lpf)—1.6 gpf (6.0 lpf)
- Siphon jet flushing
- 17-1/4" bowl height
- 1-1/2" top inlet spud
- 9-1/2" x 8" water surface
- Uses 20% less water than standard when used with high-efficiency flushometer valve low-consumption toilets
- Flush valve and seat not included



PF1726WH

Codes & Standards

- IAPMO/cUPC
- ASME A112.19.2
- EPA WaterSense (when used with a 1.0 gpf or 1.28 gpf WaterSense-compliant flushometer)

Technical Information

Configuration	Flush valve bowl
Gallons per Flush	1.0 gpf (3.78 lpf)—1.6 gpf (6.0 lpf)
Spud Size	1-1/2" top
Trapway	2" fully glazed
Water Area	9-1/2" x 8"
Seat Post Hole Centers	5-1/2"

Specified Model

Model	Model Description	Color
PF1726WH	Elongated floor mount, rear outlet, flush valve bowl	White (WH)




Specifications

PF1726WH High-Efficiency Flush Valve Bowl



Product Specifications

This elongated bowl shall be made of vitreous china. Bowl shall pair with a 1.0 gpf (3.8 lpf)–1.6 gpf (6.0 lpf) flushometer valve. Bowl shall have 2" (5.1 cm) glazed trapway. Toilet bowl shall be less seat and supply. Toilet shall be 4-1/4" (10.8 cm) rough-in.

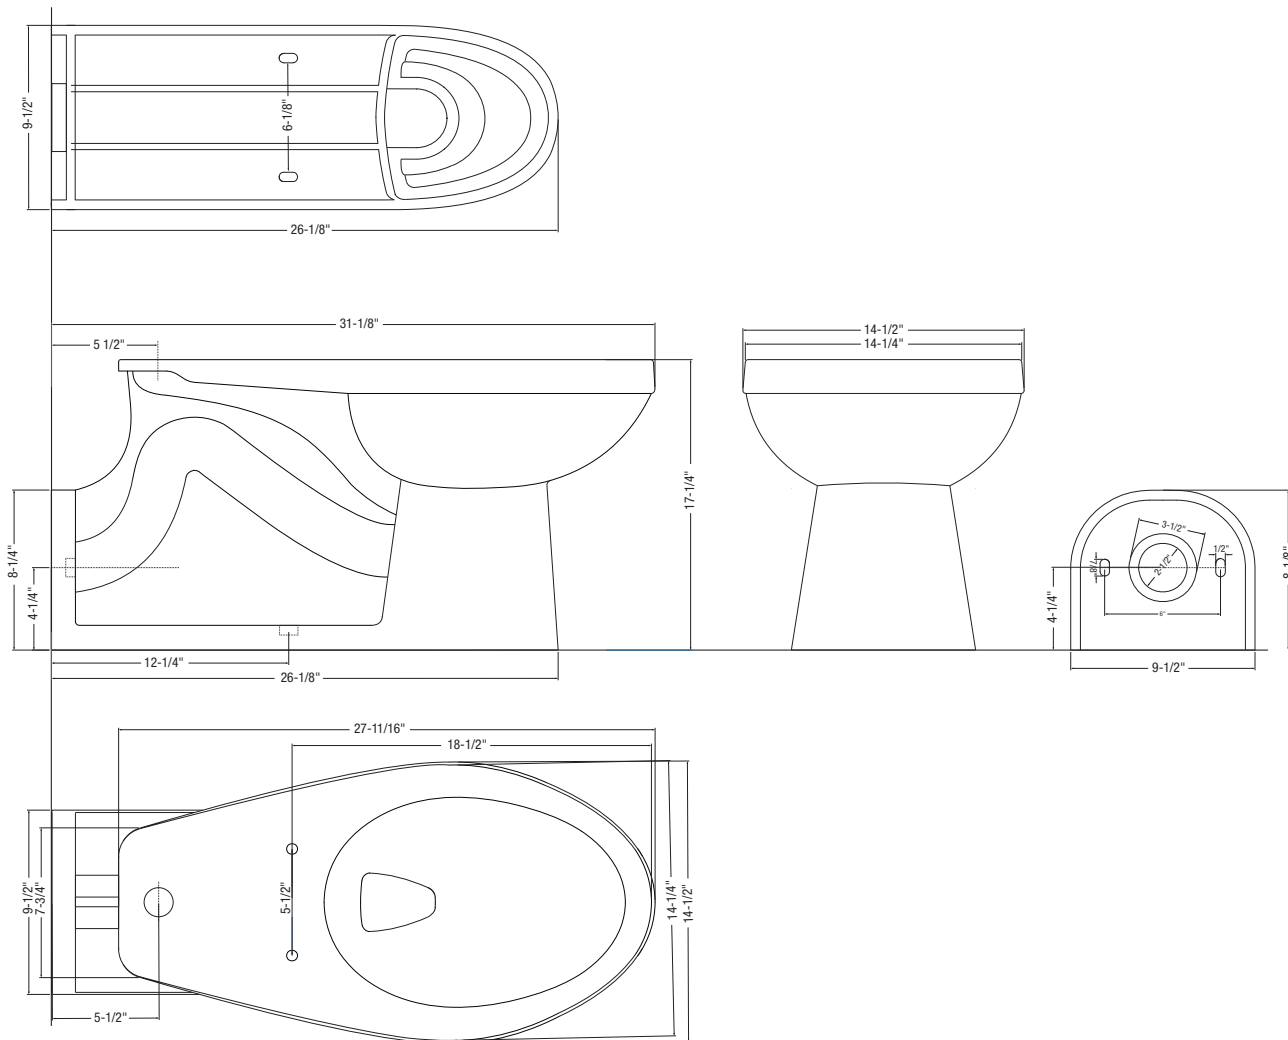

All dimensions and specifications are nominal and may vary. Dimensions of 8" and greater have a tolerances of +3%. Dimensions less than 8" have a tolerances of +5%.

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a lifetime limited warranty on the vitreous china and a 5-year limited warranty on the fittings. This product meets or exceeds ASME/ANSI A112.19.2M. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.

